

# Cucumber Report

11 Jan 2023, 12:06:49 PM

**Start : Jan 11, 12:06:28.466 PM**

**End : Jan 11, 12:06:46.640 PM**

**Duration : 18.174 s**

*Features*

*Scenarios*

*Steps*

**PASSED - 0**

**FAILED - 1**

**SKIPPED - 0**

**PASSED - 0**

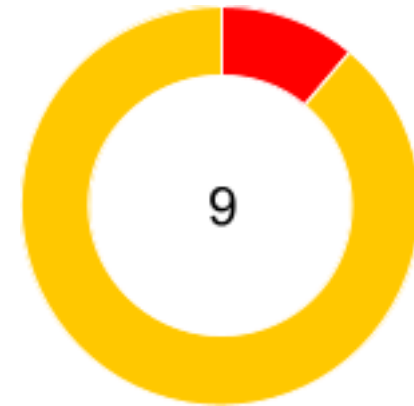
**FAILED - 1**

**SKIPPED - 0**

**PASSED - 0**

**FAILED - 1**

**SKIPPED - 8**







#	Feature Name	T	P	F	S	Duration
1	AR_AP Module	1	0	1	0	18.174 s

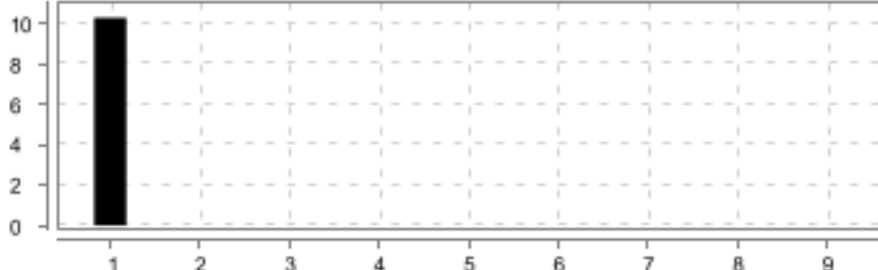



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR_AP Module	Verify download file is auto created basis the defined time and user is allowed to download the file.	9	0	1	8	18.167 s


**(F)- AR\_AP Module**

<b>FAILED</b>	<b>DURATION - 18.174 s</b>	Scenarios		Steps	
/ 12:06:28.466 PM // 12:06:46.640 PM /		Total - 1	1	Total - 9	9
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 8	

**(S)- Verify download file is auto created basis the defined time and user is allowed to download the file.**

<b>FAILED</b>	<b>DURATION - 18.167 s</b>		Steps	
/ 12:06:28.471 PM // 12:06:46.638 PM /			Total - 9	
AR_AP Module			Pass - 0	
@blocker @KUBS_AR_AP_UAT_008_003_TC01 @AR/AP			Fail - 1 Skip - 8	

#	Step / Hook Details	Status	Duration
1	<p>Given User should go to the kubs url and login as a maker user</p> <pre>org.openqa.selenium.WebDriverException: unknown error: net::ERR_CONNECTION_REFUSED (Session info: chrome=108.0.5359.125) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.150', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.4.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [4d3965b6966a7e05074846fa75303330, get {url=http://172.27.78.245:6080/kubs-qc/}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 108.0.5359.125, chrome: {chromedriverVersion: 108.0.5359.71 (1e0e3868ee06..., userDataDir: C:\Users\ININDC~1\AppData\L..., goog:chromeOptions: {debuggerAddress: localhost:63327}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63327/devtoo..., se:cdpVersion: 108.0.5359.125, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 4d3965b6966a7e05074846fa75303330 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)</pre>	<b>FAILED</b>	10.268 s

#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:326) at stepdefinitions.ACCOUNTSPAYABLE_VendorContracts. user_should_go_to_the_kubs_url_and_login_as_a_maker_user(ACCOUNTSPAYABLE_VendorContracts.java:48)   at ?.User should go to the kubs url and login as a maker user(file:///C:/Users/ININDC00075/git/Arshath_Excel_AzentioAutomationFramework/ AzentioAutomationFramework_ARAP_Excel_Arshath/src/test/java/features/ArAp2.feature:861) * Not displayable characters are replaced by '?'. </pre>		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.417 s
	screenshot		
			
2	And click on arap configuration main menu	SKIPPED	0.001 s
3	And click on payment file generation setup sub menu	SKIPPED	0.001 s
4	And user update the Excel sheet testdata for online payments	SKIPPED	0.001 s
5	And configure the file format as Payout wise	SKIPPED	0.001 s
6	And save the arap configure record	SKIPPED	0.000 s
7	And validate the saved record	SKIPPED	0.001 s
8	Then Click on Update Deposited Cheque Notification	SKIPPED	0.001 s
9	And Select and Submit the Update Deposited Cheque record1	SKIPPED	0.001 s

(Step) AFTER\_STEP - stepdefinitions.  
HooksClass.addScreenshot(io.cucumber.  
java.Scenario)

(S) Verify download file is auto created  
basis the defined time and user is allowed  
to download the file.

(F) AR\_AP Module



#### This site can't be reached

172.27.78.245 refused to connect.

Try:

- Checking the connection
- [Checking the proxy and the firewall](#)

ERR\_CONNECTION\_REFUSED

Reload

Details