


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	Checking the Bank Reconcilliation functionality	1	1	0	0	1 m 3.928 s

SCENARIOS SUMMARY -- 3 --

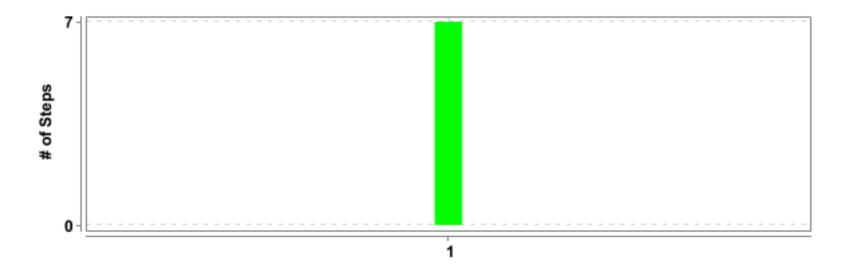


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Checking the Bank Reconcilliation	Verify system gives correct match basis the matching rule	7	7	0	0	1 m 3.922 s
	functionality	defined					

(F)- Checking the Bank Reconcilliation functionality

PASSED	DURATION - 1 m 3.928 s	Scenarios		Steps	
		Total - 1		Total - 7	
/ 10:14:21.350 AI	M // 10:15:25.278 AM /	Pass - 1	1	Pass - 7	7
		Fail - 0		Fail - 0	
		Skip - 0		Skip - 0	

(S)- Verify system gives correct match basis the matching rule defined

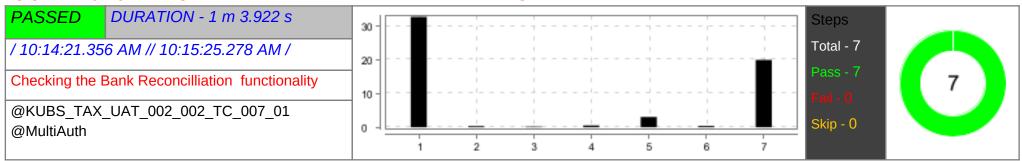


#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	PASSED	32.738 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.674 s
	screenshot		
	TABLE TO BE ADD SQUARE AND ADDRESS OF THE SQUARE ADDRESS OF THE SQ		
2	Then select data set ID for verify match record basis data matching rule	PASSED	0.352 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.240 s
	screenshot		
	DATESTICS		

AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) FASSED 0.537 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Then open bank recon format configuration of a bank AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.565 s O.565 s	#	Step / Hook Details	Status	Duration
screenshot When click on eye button of bank recon format AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then open bank recon format configuration of a bank AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 3.062 s PASSED 0.565 s	3	And user should navigate to bank recon format menu	PASSED	0.203 s
4 When click on eye button of bank recon format AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot Then open bank recon format configuration of a bank AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 3.062 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.565 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.259 s
4 When click on eye button of bank recon format AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then open bank recon format configuration of a bank AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 3.062 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.537 s 0.399 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then open bank recon format configuration of a bank AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 3.062 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.399 s		ASSITION TO ASSIT		
5 Then open bank recon format configuration of a bank AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 3.062 s O.565 s	4	When click on eye button of bank recon format	PASSED	0.537 s
5 Then open bank recon format configuration of a bank AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 3.062 s O.565 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.399 s
5 Then open bank recon format configuration of a bank AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 3.062 s 0.565 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.565 s				
	5	Then open bank recon format configuration of a bank	PASSED	3.062 s
SCREENSHOT SACRETION		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.565 s
ASSATION SECURITY SECURI		screenshot		
500 € 100 E		A SENTO Sometime to the state of the state		
6 And navigate to data matching rule PASSED 0.372 s	6	And navigate to data matching rule	PASSED	0.372 s
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.417 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.417 s
screenshot		screenshot		
7 Then get the matching rule for correct match record PASSED 19.964 s	7	Then get the matching rule for correct match record	PASSED	19.964 s
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.459 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.459 s
screenshot		screenshot		


DETAILED SECTION -- 6 --

#	Step / Hook Details	Status	Duration
	SACRETO SACRETORY SACRETOR		
	Secretary regions 4. Secretary to the secretary Secretar		

EXPANDED SECTION -- 7

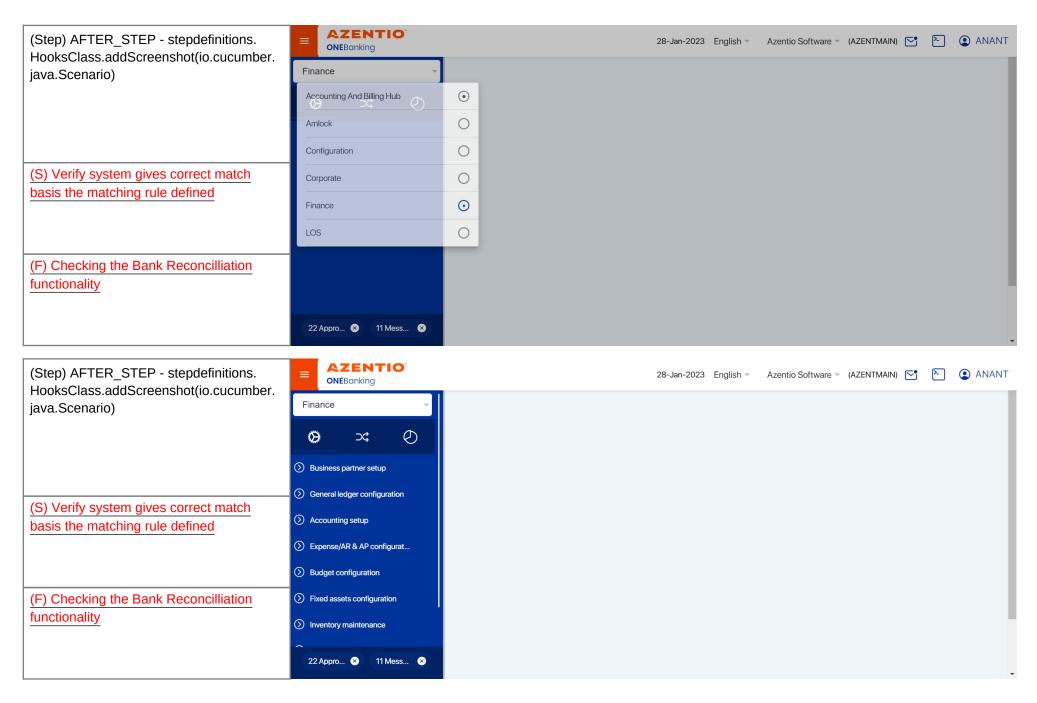

EXPANDED SECTION -- 8 --

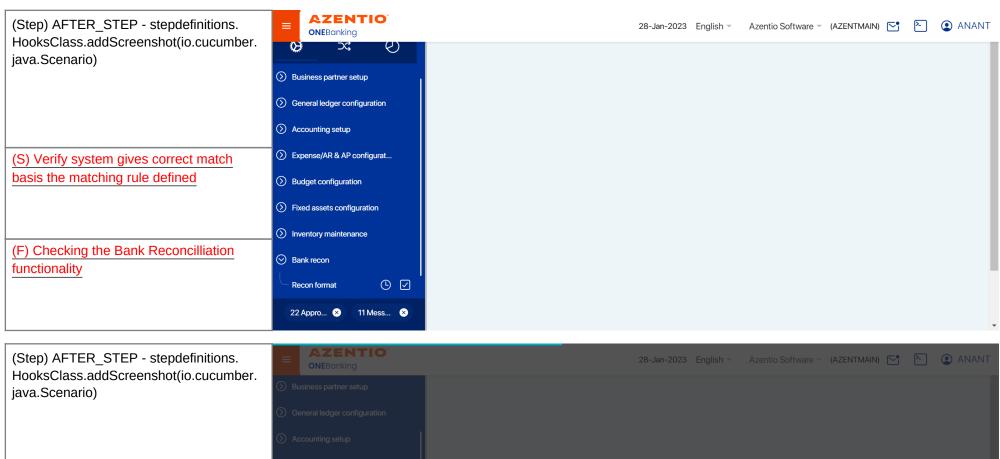

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

Business purmer setup

Centeral ledger configuration

Accounting setup

Expense/AR & AP configuration

Accounting rule defined

(F) Checking the Bank Reconcilliation functionality

(F) Checking the Bank Reconcilliation

functionality


11 Mess...


11 Mess...

1 Mass...

1

EXPANDED SECTION -- 9 --

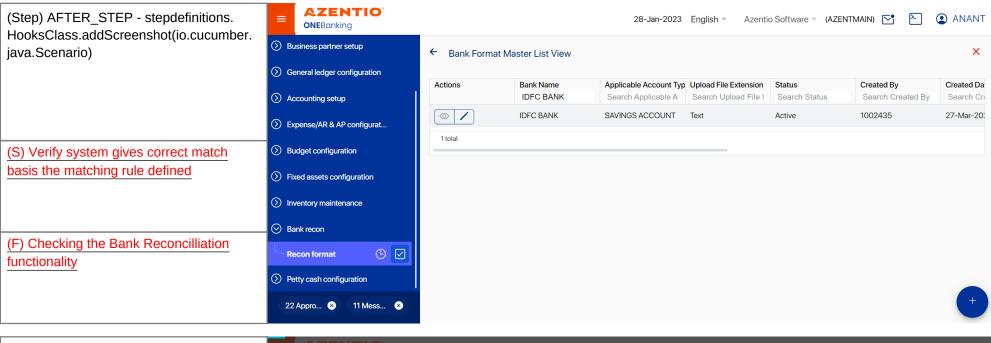

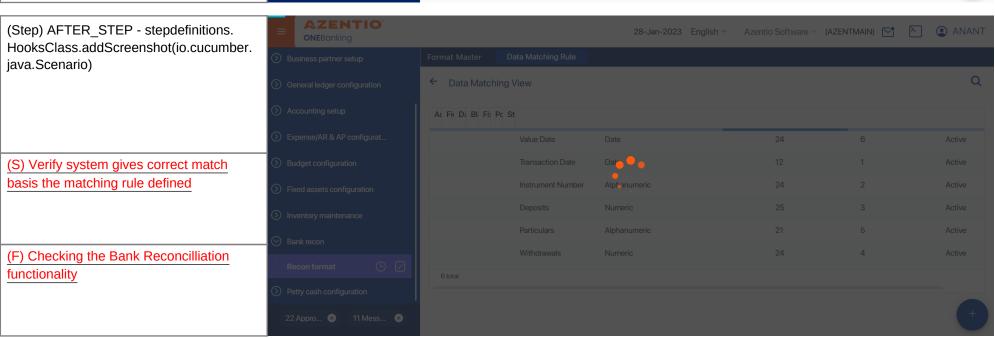

EXPANDED SECTION -- 10 --

