Cucumber Report

Start : Jan 20, 3:56:53.689 PM	End : Jan 20, 3:58:45.929 PM	Duration : 1 m 52.240 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 15 FAILED - 1 SKIPPED - 6

Features: 1

Scenarios: 1

Steps: 22

Pass %: 0 %

Pass %: 0 %

Pass %: 68 %
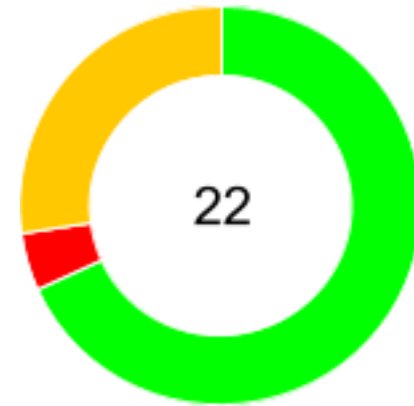
#	Feature Name	T	P	F	S	Duration
1	to verify user can able to do transaction in petty cash module	1	0	1	0	1 m 52.240 s
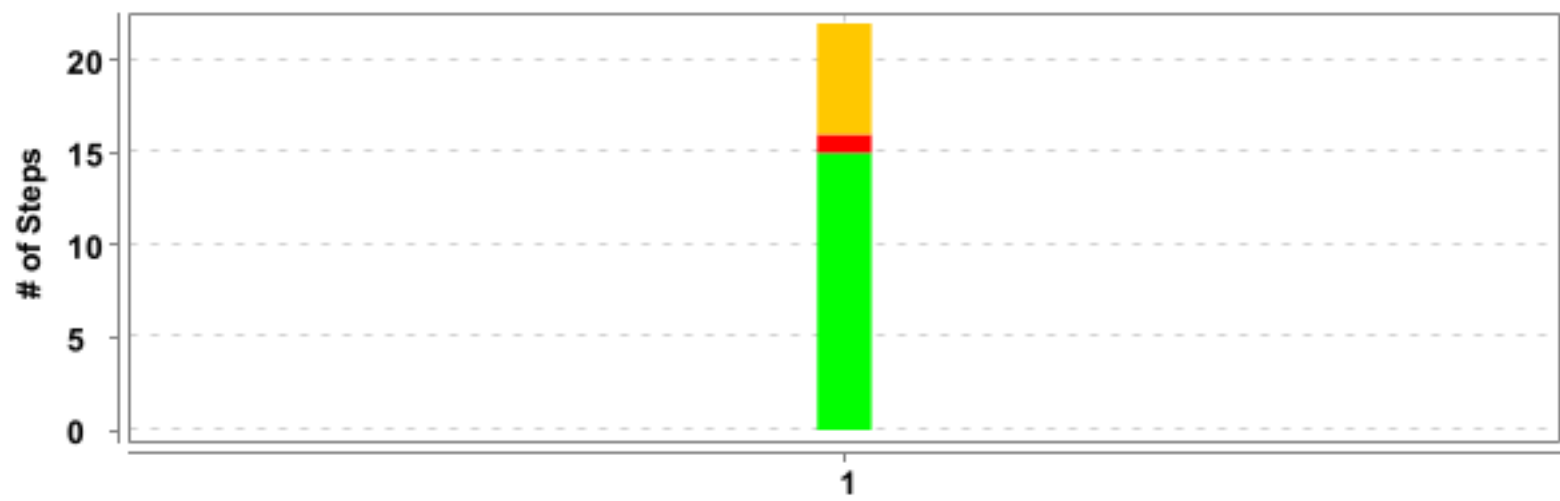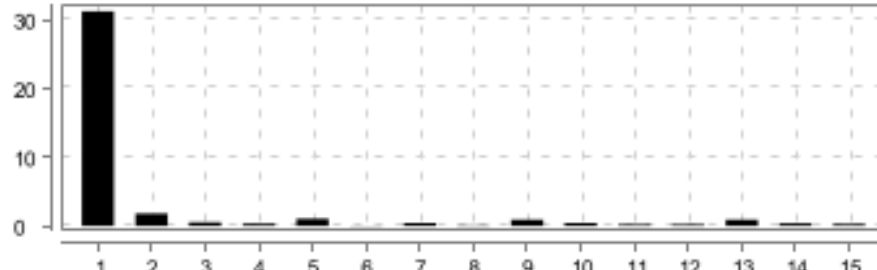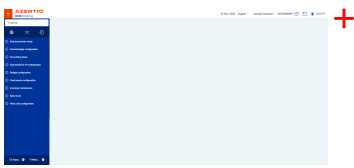
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	to verify user can able to do transaction in petty cash module	Record multiple expense code at a time in the reimbursement	22	15	1	6	1 m 52.234 s

(F)- to verify user can able to do transaction in petty cash module

FAILED	DURATION - 1 m 52.240 s	Scenarios		Steps	
		Total - 1		Total - 22	
/ 3:56:53.689 PM // 3:58:45.929 PM /		Pass - 0	1	Pass - 15	22
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 6	

(S)- Record multiple expense code at a time in the reimbursement

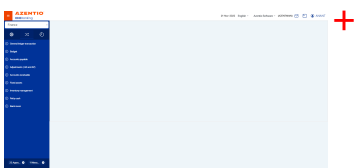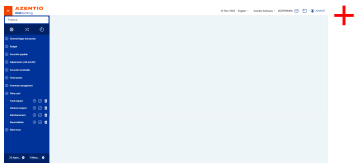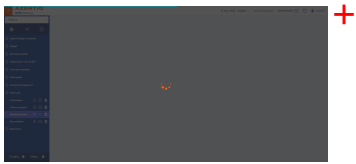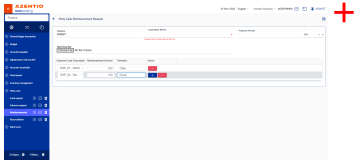| FAILED	DURATION - 1 m 52.234 s		Steps	
/ 3:56:53.695 PM // 3:58:45.929 PM /			Total - 22	
to verify user can able to do transaction in petty cash module			Pass - 15	22
			Fail - 1	
@KUBS_PC_UAT_003_003			Skip - 6	

#	Step / Hook Details	Status	Duration
1	Given Maker Navigate to UAT URL login	PASSED	31.231 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	1.026 s
	screenshot		
2	Then Choose the second Tab Segment	PASSED	1.809 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.411 s
	screenshot		

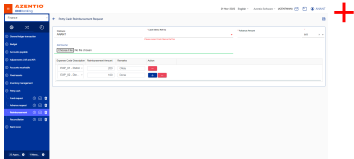| #	Step / Hook Details	Status	Duration
3	And Click on Petty cash module	PASSED	0.539 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.349 s
	screenshot		
4	Then Click on Reimbursement Eye Icon	PASSED	0.339 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	1.066 s
	screenshot		
5	Then Click on Add Icon in Petty cash	PASSED	1.040 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.552 s
	screenshot		
6	And Choose the data set id reimbursement for multiple expense code	PASSED	0.033 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.209 s
	screenshot		
7	And Choose Cash Memo Ref number	PASSED	0.448 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.386 s
	screenshot		

#	Step / Hook Details	Status	Duration
8	Then Enter Advance Amount value	PASSED	0.105 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.225 s
	screenshot		
9	And Choose Expense Code	PASSED	0.928 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.497 s
	screenshot		
10	Then Enter Reimbursement Amount	PASSED	0.436 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.295 s
	screenshot		
11	And Enter Reimbursement Remarks	PASSED	0.247 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.260 s
	screenshot		

#	Step / Hook Details	Status	Duration
12	Then Click on Extra Add button	PASSED	0.220 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.284 s
	screenshot 		
13	And Choose Multiple Expense Code	PASSED	0.928 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.537 s
	screenshot 		
14	Then Enter Multiple Reimbursement Amount	PASSED	0.394 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.300 s
	screenshot 		
15	And Enter Multiple Reimbursement Remarks	PASSED	0.271 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.223 s
	screenshot		

#	Step / Hook Details	Status	Duration
16	Then save Record in Petty cash	FAILED	1 m 0.417 s

	org.openqa.selenium.TimeoutException: Expected condition failed: waiting for element to be clickable: Proxy element for: DefaultElementLocator 'By.xpath: //button[@aria-label='Close']' (tried for 60 second(s) with 500 milliseconds interval)
	   at org.openqa.selenium.support.ui.FluentWait.timeoutException(FluentWait.java:263)
	   at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:231)
	   at helper.WaitHelper.waitForElementToVisibleWithFluentWait(WaitHelper.java:102)
	   at stepdefinitions.Petty_Cash.save_record_in_petty_cash(Petty_Cash.java:186)
	   at ?.save Record in Petty cash(file:///C:/Users/ININDC00073/git/KamalaPriya_ExcelUpdated_KUBS/AzentioAutomationFramework_ExcelKUBS_Kamalapriya2/src/test/java/features/PettyCash_UAT.feature:263)
	 Caused by: org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//button[@aria-label='Close']"} (Session info: chrome=108.0.5359.126) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.126', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '19.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [056f93072e57b2eb1dc9b35669875329, findElement {using=xpath, value=//button[@aria-label='Close']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 108.0.5359.126, chrome: {chromedriverVersion: 108.0.5359.71 (1e0e3868ee06..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:62563}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:62563/devtoo..., se:cdpVersion: 108.0.5359.126, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 056f93072e57b2eb1dc9b35669875329
	   at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:67)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:500)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:484)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	   at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	   at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	   at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381)
	   at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373)
	   at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70)
	   at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39)		

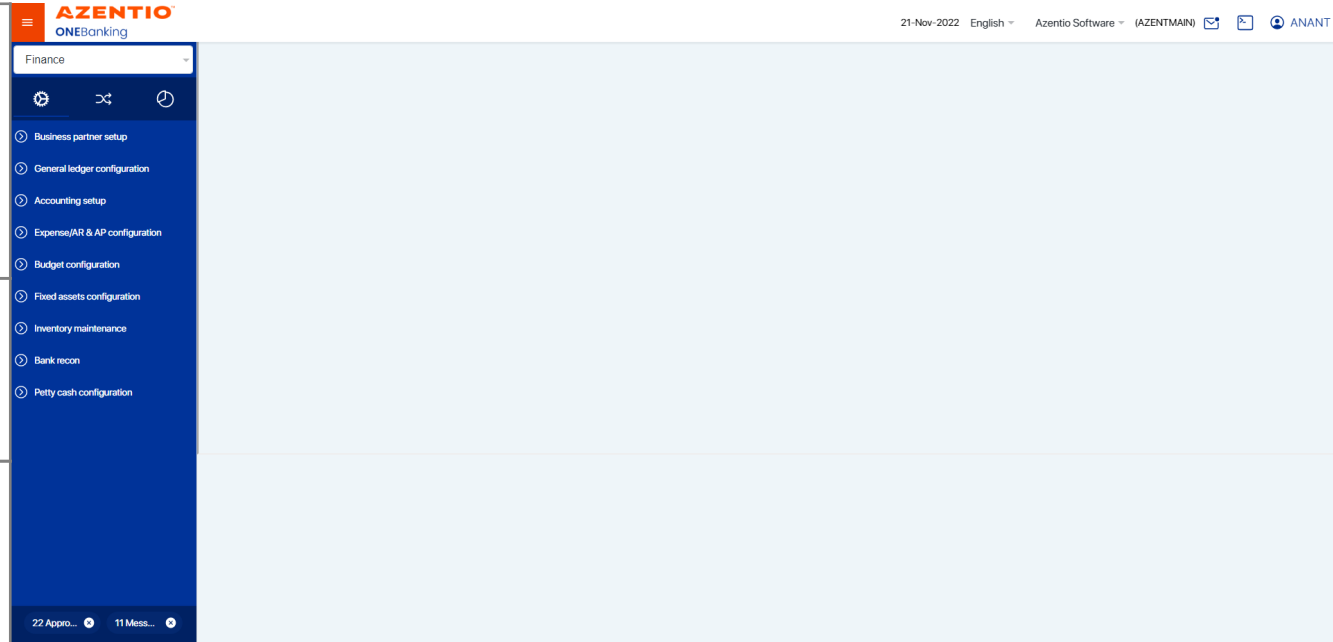| #	Step / Hook Details	Status	Duration
	at jdk.proxy2/jdk.proxy2.$Proxy46.isDisplayed(Unknown Source)		
	at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:307)		
	at org.openqa.selenium.support.ui.ExpectedConditions.access$000(ExpectedConditions.java:40)		
	at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:293)		
	at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:290)		
	at org.openqa.selenium.support.ui.ExpectedConditions$23.apply(ExpectedConditions.java:660)		
	at org.openqa.selenium.support.ui.ExpectedConditions$23.apply(ExpectedConditions.java:656)		
	at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:208)		
	at helper.WaitHelper.waitForElementToVisibleWithFluentWait(WaitHelper.java:102)		
	at stepdefinitions.Petty_Cash.save_record_in_petty_cash(Petty_Cash.java:186)		
	at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:578)		
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:64)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:104)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:71)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda$runScenario$0(TestNGCucumberRunner.java:116)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:117)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:113)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:31)		
	at java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:104)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:578)		
	at org.testng.internal.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:133)		
	at org.testng.internal.TestInvoker.invokeMethod(TestInvoker.java:598)		
	at org.testng.internal.TestInvoker.invokeTestMethod(TestInvoker.java:173)		
	at org.testng.internal.MethodRunner.runInSequence(MethodRunner.java:46)		
	at org.testng.internal.TestInvoker$MethodInvocationAgent.invoke(TestInvoker.java:824)		
	at org.testng.internal.TestInvoker.invokeTestMethods(TestInvoker.java:146)		
	at org.testng.internal.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:146)		
	at org.testng.internal.TestMethodWorker.run(TestMethodWorker.java:128)		
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1511)		
	at org.testng.TestRunner.privateRun(TestRunner.java:794)		
	at org.testng.TestRunner.run(TestRunner.java:596)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:377)		

#	Step / Hook Details	Status	Duration
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:371) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:332) at org.testng.SuiteRunner.run(SuiteRunner.java:276) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:53) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:96) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1212) at org.testng.TestNG.runSuitesLocally(TestNG.java:1134) at org.testng.TestNG.runSuites(TestNG.java:1063) at org.testng.TestNG.run(TestNG.java:1031) at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115) at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251) at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.687 s
17	Then Goto The Notification Icon	SKIPPED	0.000 s
18	And Store the Referance Id and Open the Record reimbursement for multiple expense code	SKIPPED	0.000 s
19	Then Click submit button and Enter the Remark submit it	SKIPPED	0.000 s
20	Then Get the reviewer id for reimburesement of multiple expense code and store it in excel	SKIPPED	0.000 s
21	And Close the Alert	SKIPPED	0.001 s
22	Then logout from maker	SKIPPED	0.000 s

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Record multiple expense code at a
time in the reimbursement

(F) to verify user can able to do
transaction in petty cash module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Record multiple expense code at a
time in the reimbursement

(F) to verify user can able to do
transaction in petty cash module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Record multiple expense code at a
time in the reimbursement

(F) to verify user can able to do
transaction in petty cash module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Record multiple expense code at a
time in the reimbursement

(F) to verify user can able to do
transaction in petty cash module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Record multiple expense code at a time in the reimbursement

(F) to verify user can able to do transaction in petty cash module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Record multiple expense code at a time in the reimbursement

(F) to verify user can able to do transaction in petty cash module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Record multiple expense code at a time in the reimbursement

(F) to verify user can able to do transaction in petty cash module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Record multiple expense code at a time in the reimbursement

(F) to verify user can able to do transaction in petty cash module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Record multiple expense code at a time in the reimbursement	
(F) to verify user can able to do transaction in petty cash module	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Record multiple expense code at a time in the reimbursement	
(F) to verify user can able to do transaction in petty cash module	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Record multiple expense code at a time in the reimbursement

(F) to verify user can able to do transaction in petty cash module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Record multiple expense code at a time in the reimbursement

(F) to verify user can able to do transaction in petty cash module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Record multiple expense code at a time in the reimbursement

(F) to verify user can able to do transaction in petty cash module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Record multiple expense code at a time in the reimbursement

(F) to verify user can able to do transaction in petty cash module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Record multiple expense code at a time in the reimbursement	
(F) to verify user can able to do transaction in petty cash module	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Record multiple expense code at a time in the reimbursement	
(F) to verify user can able to do transaction in petty cash module	