Cucumber Report

Jan 9, 2022, 4:54:36 AM

Start : Jan 09, 4:53:28.336 AM	End : Jan 09, 4:54:35.885 AM	Duration : 1 m 7.549 s

Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 5 FAILED - 1 SKIPPED - 1

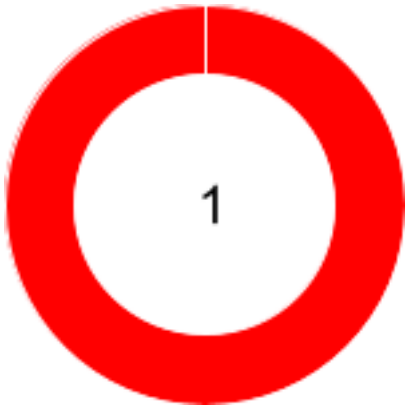

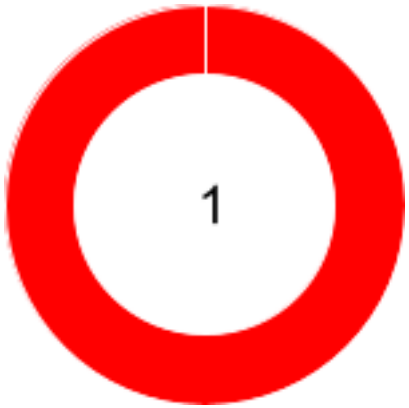

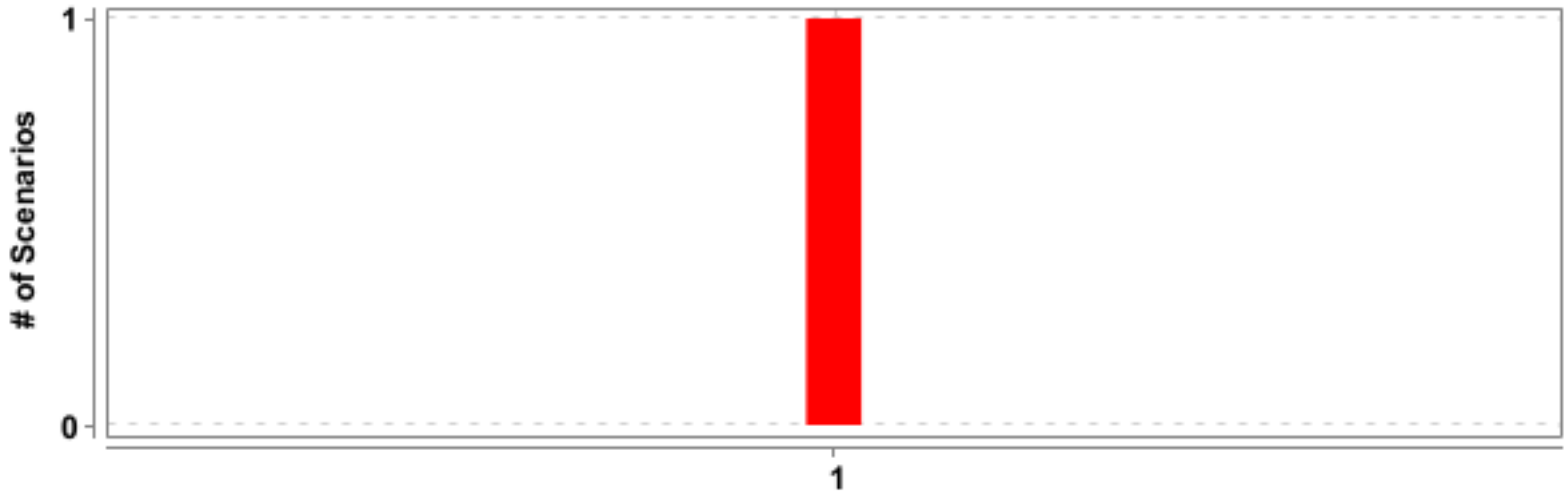

#	Feature Name	T	P	F	S	Duration
1	Checking the Supplementary Budget functionality	1	0	1	0	1 m 7.549 s

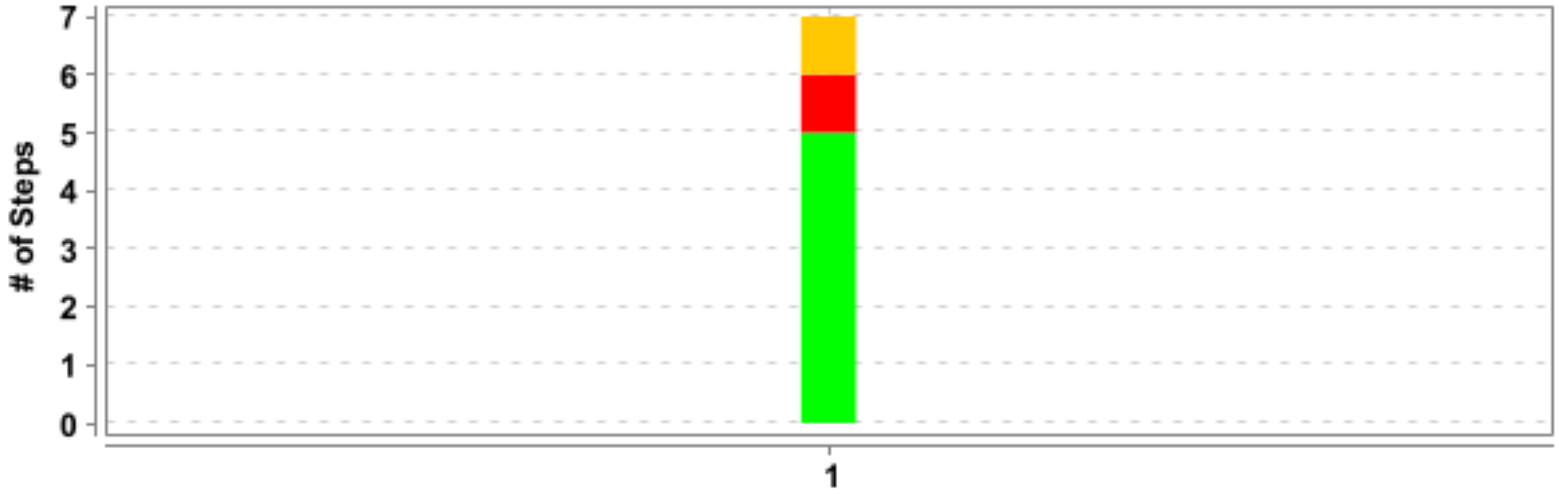

#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Checking the Supplementary Budget functionality	Check the functionality	7	5	1	1	1 m 7.546 s

(F)- Checking the Supplementary Budget functionality

FAILED	DURATION - 1 m 7.549 s	Scenarios		Steps	
/ 4:53:28.336 AM // 4:54:35.885 AM /		Total - 1 Pass - 0 Fail - 1 Skip - 0		Total - 7 Pass - 5 Fail - 1 Skip - 1	

(S)- Check the functionality

FAILED	DURATION - 1 m 7.546 s		Steps	
/ 4:53:28.339 AM // 4:54:35.885 AM /		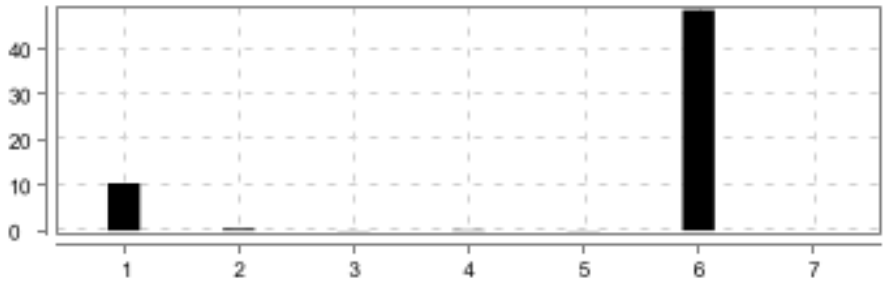	Total - 7 Pass - 5 Fail - 1 Skip - 1	
Checking the Supplementary Budget functionality				
@SupplementaryBudget				

#	Step / Hook Details	Status	Duration
1	Given maker should navigate to the url and login with valid credentials	PASSED	10.429 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.336 s
	screenshot		
	+		
2	And maker should navigate to the budget module	PASSED	0.421 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.159 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	And maker click on budget field	PASSED	0.091 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.158 s
4	When maker click on budget supplementary eye icon	PASSED	0.152 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.137 s
5	And click on add button on budget supplementary view page	PASSED	0.089 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.338 s
6	Then maker should fill the required field org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [953f86f311a1ce5cfecadef871644bed, findElement {using=xpath, value=//(//span[@title="Double click to edit"])[2]//input}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L.	FAILED	48.571 s

#	Step / Hook Details	Status	Duration
	..}, goog:chromeOptions: {debuggerAddress: localhost:57211}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:57211/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 953f86f311a1ce5cfecadef871644bed at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.$Proxy46.isDisplayed(Unknown Source) at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:307) at org.openqa.selenium.support.ui.ExpectedConditions.access$000(ExpectedConditions.java:40) at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:293) at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:290) at org.openqa.selenium.support.ui.ExpectedConditions$23.apply(ExpectedConditions.java:660) at org.openqa.selenium.support.ui.ExpectedConditions$23.apply(ExpectedConditions.java:656) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:208) at helper.WaitHelper.waitForElement(WaitHelper.java:79) at stepdefinitions.BUDGET_SupplementaryBudget.maker_should_fill_the_required_field(BUDGET_SupplementaryBudget.java:103) at ?.maker should fill the required field(file:///C:/Users/inindc00089/eclipse-workspace/AzentioAutomationFramework2/src/test/java/features/BUDGET_SupplementaryBudget.feature:10) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	FAILED	4.019 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [953f86f311a1ce5cfecadef871644bed, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:57211}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy:		

#	Step / Hook Details	Status	Duration
	Proxy(), se:cdp: ws://localhost:57211/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 953f86f311a1ce5cfecadef871644bed at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347) at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		
7	Then maker should save the changed budget code details	SKIPPED	0.001 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.249 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [953f86f311a1ce5cfecadef871644bed, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:57211}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:57211/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 953f86f311a1ce5cfecadef871644bed at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432) at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		

(Step) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	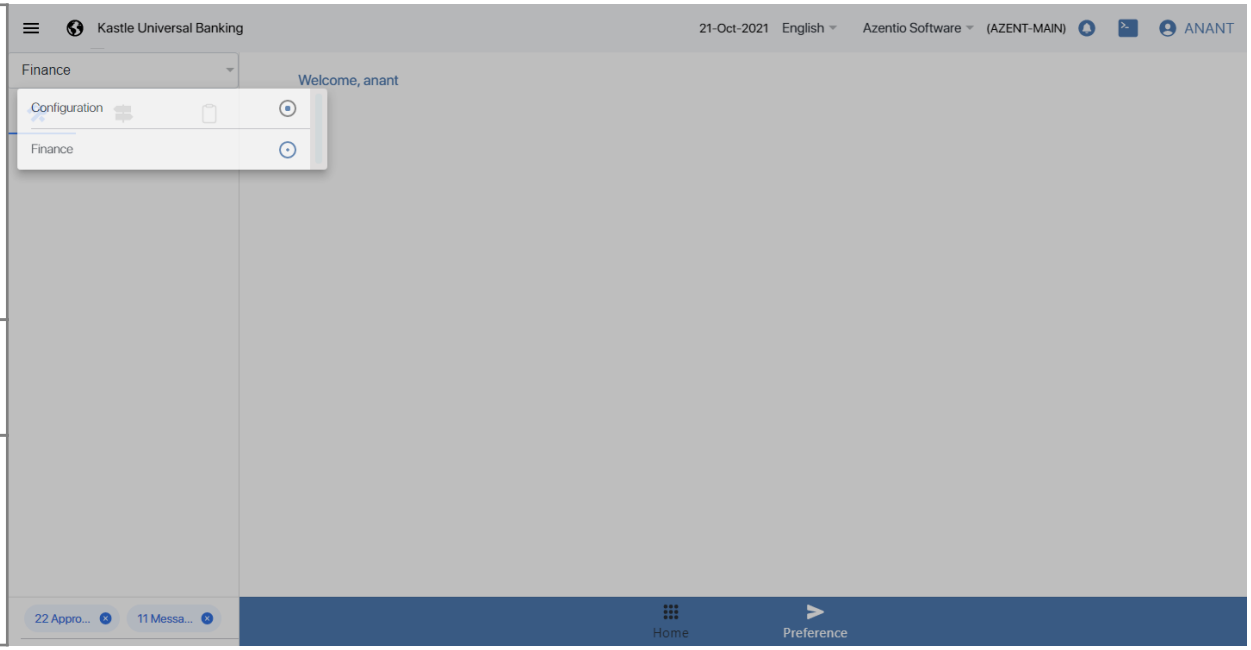
(S) Check the functionality	
(F) Checking the Supplementary Budget functionality	

(Step) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	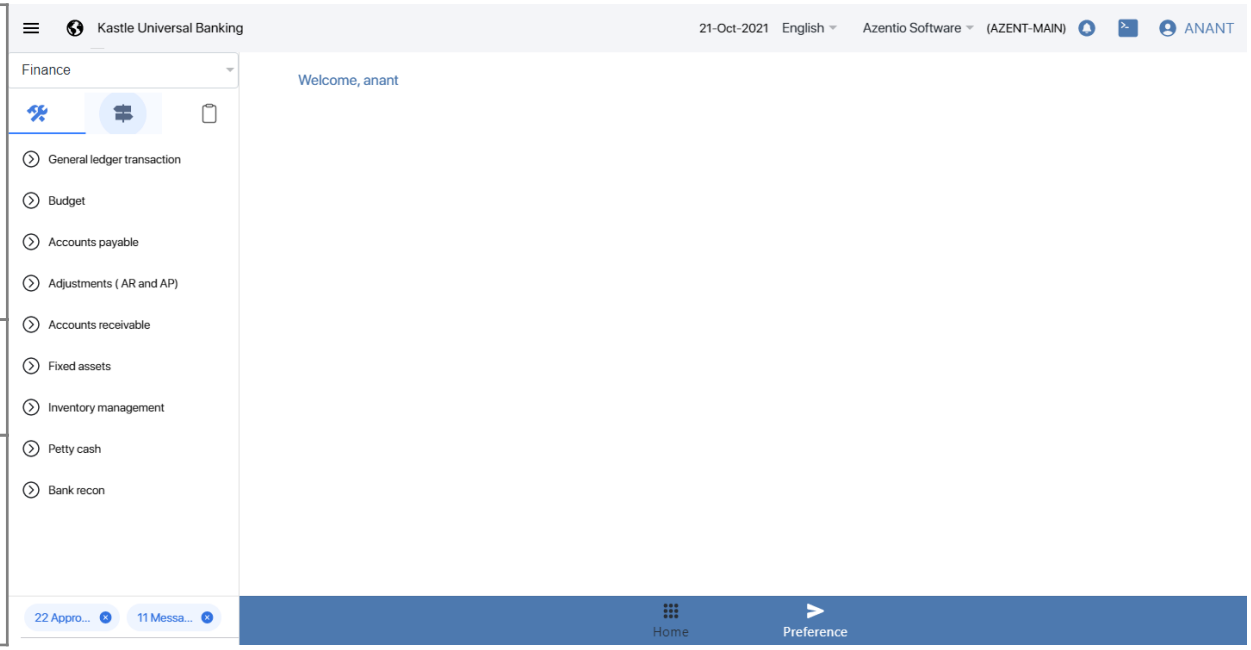
(S) Check the functionality	
(F) Checking the Supplementary Budget functionality	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	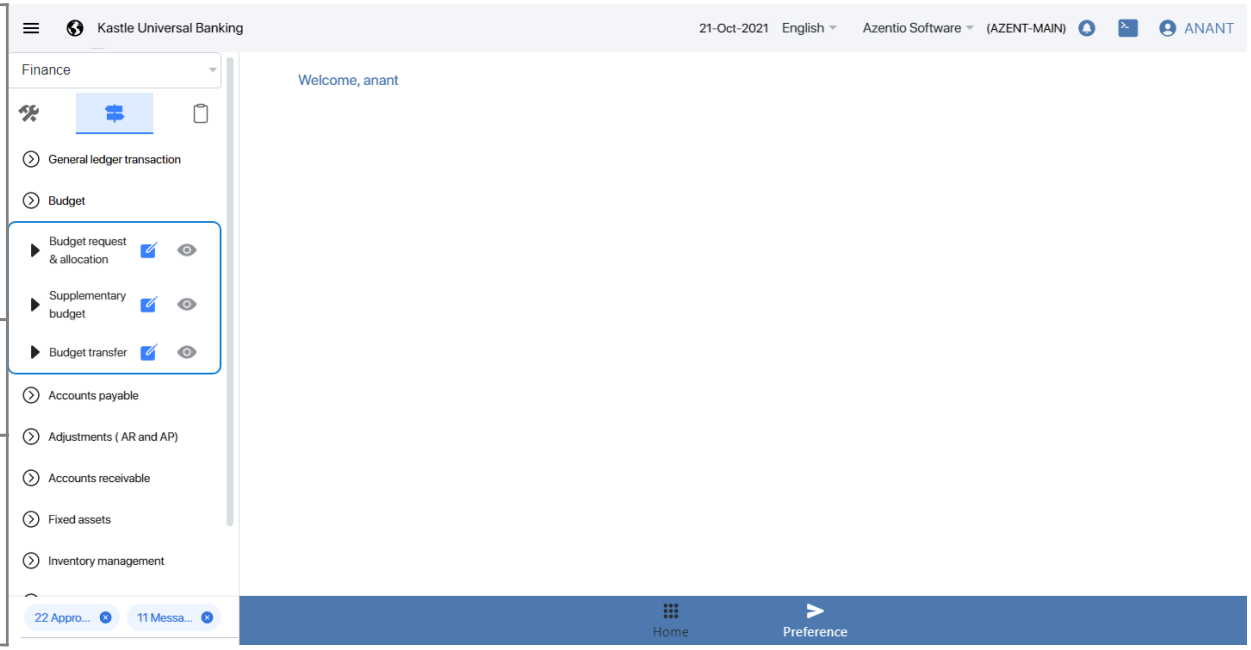
(S) Check the functionality	
(F) Checking the Supplementary Budget functionality	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	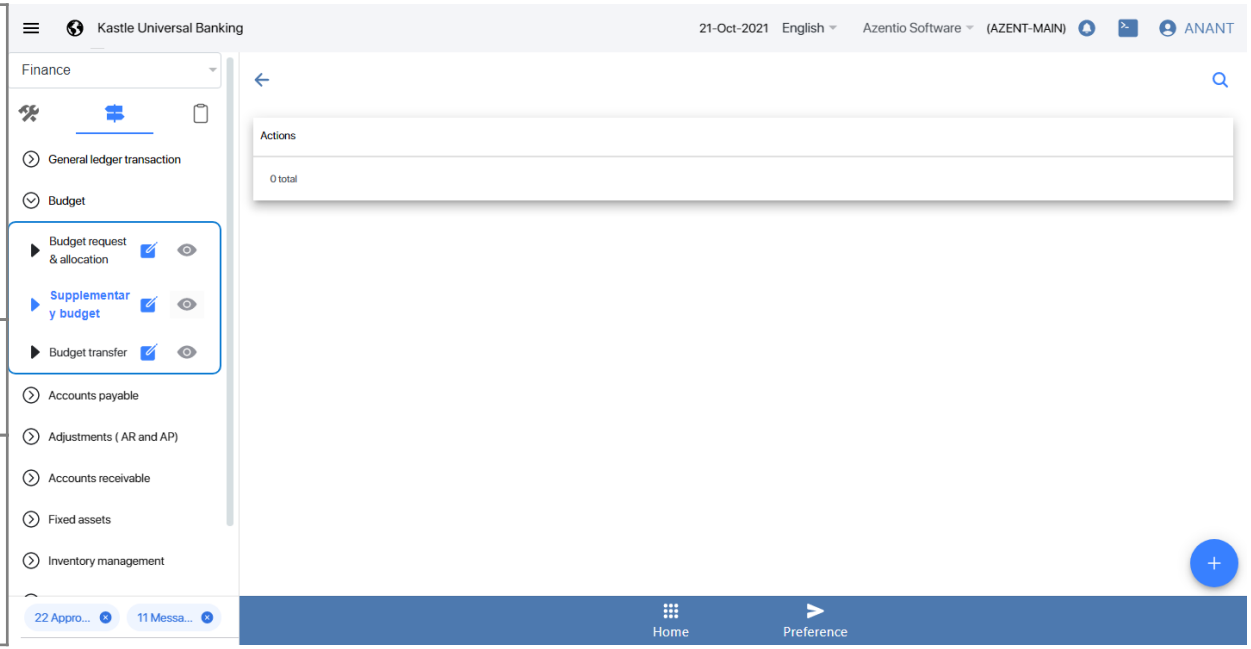
(S) Check the functionality	
(F) Checking the Supplementary Budget functionality	

(Step) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)

(S) Check the functionality
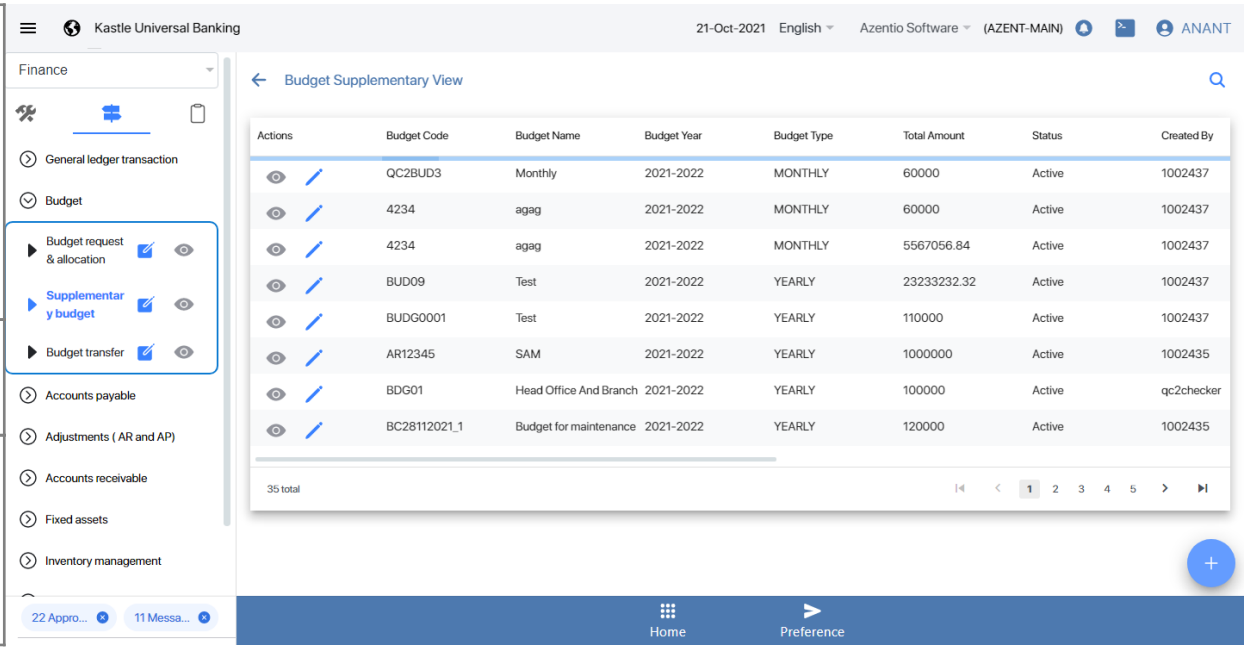
(F) Checking the Supplementary Budget functionality