Duration: 16.472 s Start: Jan 09, 3:10:13.735 PM End: Jan 09, 3:10:30.207 PM Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 8 9 40 50 60 40 50 60 40 50 60 30 Pass % 70 30 Pass % 70 30 Pass % 70 20 20 20 80 80 80 90 90 100


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	Check the Functionality of Inventory	1	0	1	0	16.472 s

SCENARIOS SUMMARY

-- 3 --

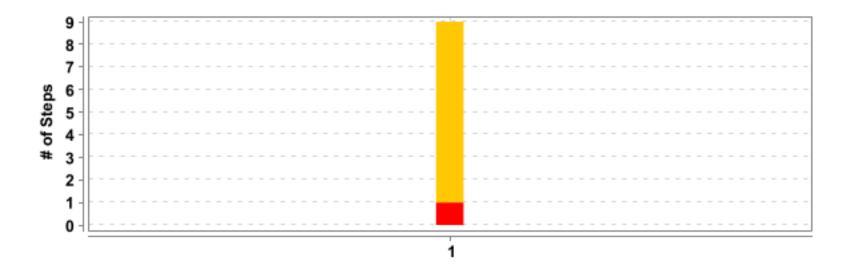


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the Functionality of Inventory	Unique Inventory item code should be created	9	0	1	8	16.467 s

DETAILED SECTION -- 4 --

(F)- Check the Functionality of Inventory

FAILED	DURATION - 16.472 s	Scenarios		Steps	
		Total - 1		Total - 9	
/ 3:10:13.735 PM	// // 3:10:30.207 PM /	Pass - 0	1	Pass - 0	9
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 8	

(S)- Unique Inventory item code should be created

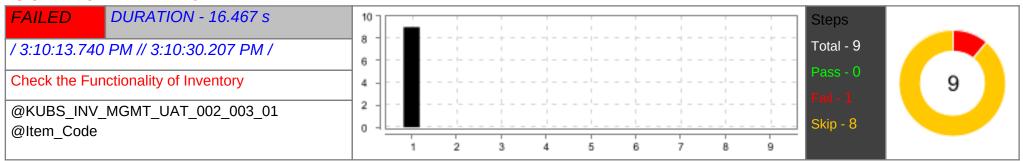

#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	FAILED	9.002 s
	org.openqa.selenium.WebDriverException: unknown error: net::ERR_CONNECTION_REFUSED (Session info: chrome=108.0.5359.125) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.146', os.name: 'Windows 10', os. arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [98b927664d98d8379402d3fded336d28, get {url=http://172.27.78.245.6080/kubs-qc}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 108.0.5359.125, chrome: {chromedriverVersion: 108.0.5359.22 (ec46c90f5938, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:55408}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:55408/devtoo, se:cdpVersion: 108.0.5359.125, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 98b927664d98d8379402d3fded336d28 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		

DETAILED SECTION -- 5 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:326) at stepdefinitions.ACCOUNTSPAYABLE_VendorContracts. user_should_go_to_the_kubs_url_and_login_as_a_maker_user(ACCOUNTSPAYABLE_VendorContracts.java:49) at ?.User should go to the kubs url and login as a maker user(file:///C:/Users/ININDC00089/git/AzentioAutomationFramework/ArAp/AzentioAutomationFramework_ARAP_Excel/src/test/java/features/InventoryManageMent_Testing.feature:40) * Not displayable characters are replaced by '?'. AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.455 s
	Screenshot This size can the model Will Add distinct series V 1 though promote 1 though promote 2 though promote 2 though promote 3 though promote 4 though promote 4 though promote 5 though promote 6 though promote 7 though promote 8 though promote 8 though promote 9 though promote 1 though promote		
2	Then Click on Inventory Maintenance	SKIPPED	0.000 s
3	Then Click on Inventory Item Master Eye Icon	SKIPPED	0.001 s
4	Then Click on Inventory Maintenance Add button	SKIPPED	0.002 s
5	And user update the data set ID for Inventory item code	SKIPPED	0.000 s
6	Then Fill Inventory Item Mandatory fields	SKIPPED	0.000 s
7	Then Click on Inventory Item Save button	SKIPPED	0.000 s
8	Then Click on Inventory Item Notification	SKIPPED	0.001 s
9	And Select and Submit the record	SKIPPED	0.000 s

EXPANDED SECTION -- 6 --

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

 $\underline{\text{(S) Unique Inventory item code should be}}_{\text{created}}$

(F) Check the Functionality of Inventory



This site can't be reached

172.27.78.245 refused to connect.

Try:

- Checking the connection
- Checking the proxy and the firewall

ERR_CONNECTION_REFUSED

Reload

Details