# Cucumber Report

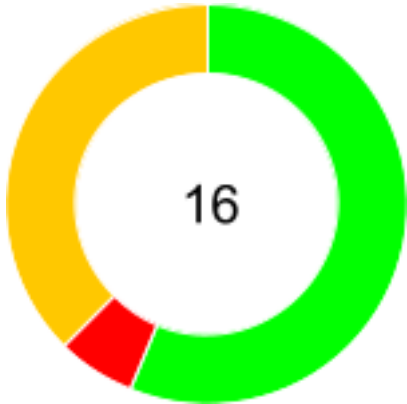| Start : Jan 12, 1:08:21.738 PM | End : Jan 12, 1:08:38.246 PM | Duration : 16.508 s |
| --- | --- | --- |
| Features | Scenarios | Steps |
| PASSED - 0<br>FAILED - 1<br>SKIPPED - 0 | PASSED - 0<br>FAILED - 1<br>SKIPPED - 0 | PASSED - 9<br>FAILED - 1<br>SKIPPED - 6 |

| # | Feature Name | T | P | F | S | Duration |
|---|---|---|---|---|---|---|
| 1 | To check BudgetDefinition moduel feature | 1 | 0 | 1 | 0 | 16.508 s |

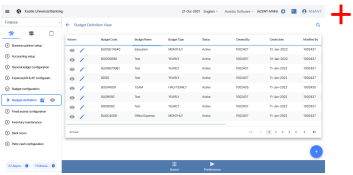| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---|---|---|---|---|---|---|
| 1 | To check BudgetDefinition moduel feature | To verify maker can able to create budget code | 16 | 9 | 1 | 6 | 16.502 s |
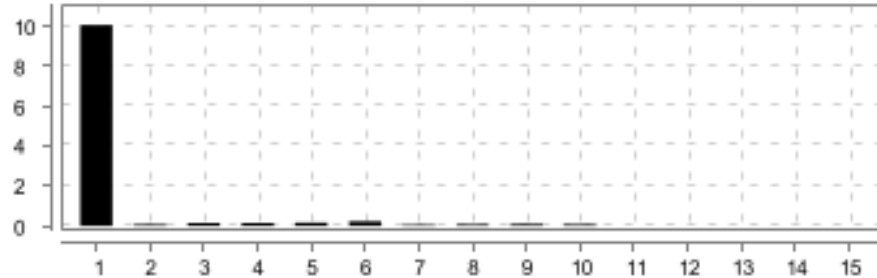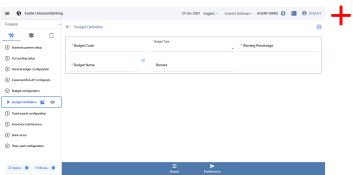
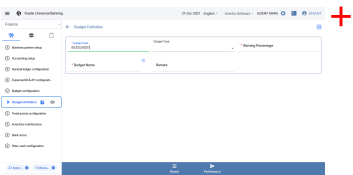## (F)- To check BudgetDefinition moduel feature

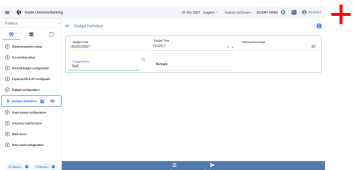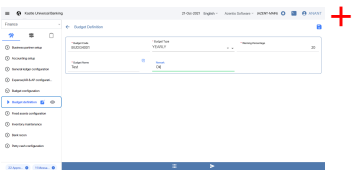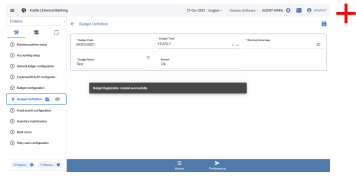| | | | | |
|---|---|---|---|---|
| **FAILED** | *DURATION - 16.508 s* | Scenarios<br>Total - 1<br>Pass - 0<br>Fail - 1<br>Skip - 0 |  1 | Steps<br>Total - 16<br>Pass - 9<br>Fail - 1<br>Skip - 6  16 |
| */ 1:08:21.738 PM // 1:08:38.246 PM /* | | | | |

## (S)- To verify maker can able to create budget code

| | | | |
|---|---|---|---|
| **FAILED** | *DURATION - 16.502 s* |  | Steps<br>Total - 16<br>Pass - 9<br>Fail - 1<br>Skip - 6  16 |
| */ 1:08:21.744 PM // 1:08:38.246 PM /* | | | |
| To check BudgetDefinition moduel feature | | | |
| @Maker_MultiAuth | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| 1 | Given navigate to URL and login as a maker and choose finance option | PASSED | 10.048 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.541 s |
| | screenshot | | |
| |  | | |
| 2 | Then click on budget configuration Menu | PASSED | 0.082 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.203 s |
| | screenshot | | |

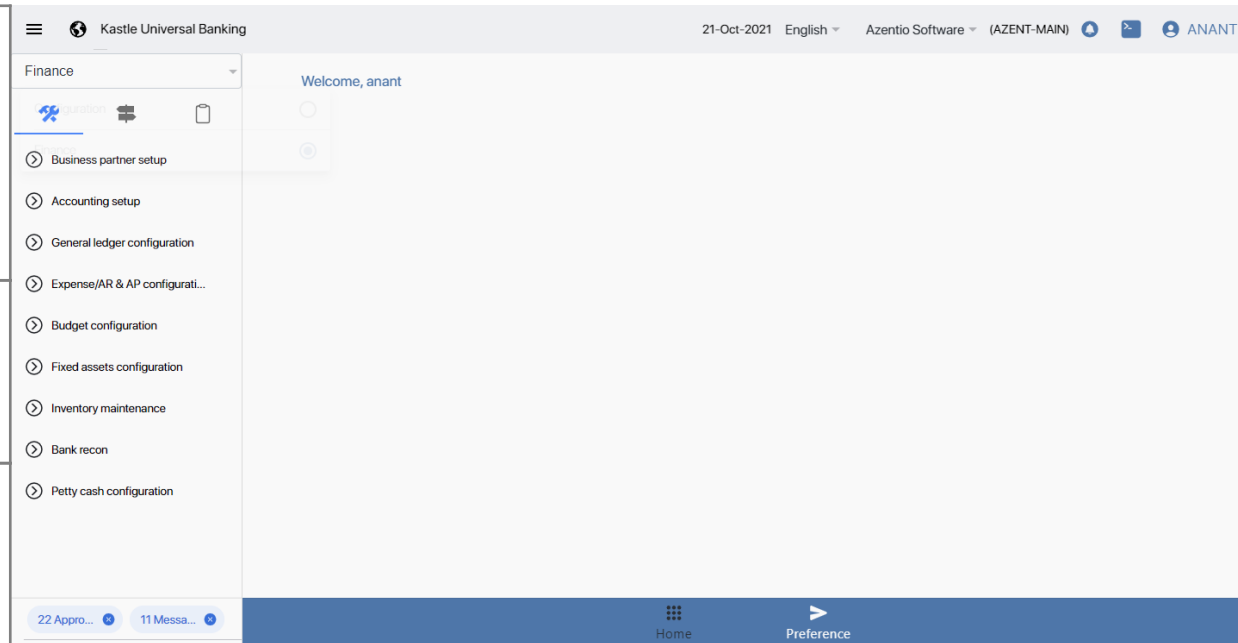| # | Step / Hook Details | Status | Duration |
|---|---------------------|--------|----------|
|   |  |  |  |
| 3 | And click on budget definition sub menu and click on eye icon | PASSED | 0.154 s |
|   | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.449 s |
|   | screenshot |  |  |
|   |  |  |  |
| 4 | And click on add icon | PASSED | 0.145 s |
|   | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.279 s |
|   | screenshot |  |  |
|   |  |  |  |
| 5 | Then enter budget code | PASSED | 0.173 s |
|   | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.156 s |
|   | screenshot |  |  |
|   |  |  |  |
| 6 | And enter budget type | PASSED | 0.236 s |
|   | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.145 s |
|   | screenshot |  |  |

| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
|  |  |  |  |
| 7 | And enter warning percentage | PASSED | 0.071 s |
|  | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.156 s |
|  | screenshot |  |  |
|  |  |  |  |
| 8 | And enter budget name | PASSED | 0.091 s |
|  | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.172 s |
|  | screenshot |  |  |
|  |  |  |  |
| 9 | Then give remark | PASSED | 0.097 s |
|  | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.164 s |
|  | screenshot |  |  |
|  |  |  |  |
| 10 | Then click on save button | FAILED | 0.090 s |
|  | org.openqa.selenium.JavascriptException: javascript error: Cannot read properties of null (reading 'shadowRoot')   (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014584', ip: '10.1.47.109', os. name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [9cdf49ae2c9780aad3fa56e1b0c1f143, executeScript {script=return document.querySelector('ion-toast').shadowRoot. querySelector('div[class=toast-message]'), args=[]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: |  |  |

| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| | 96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:64319}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:64319/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 9cdf49ae2c9780aad3fa56e1b0c1f143<br>　　at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)<br>　　at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)<br>　　at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)<br>　　at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)<br>　　at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)<br>　　at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)<br>　　at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)<br>　　at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)<br>　　at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)<br>　　at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)<br>　　at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)<br>　　at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)<br>　　at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:481)<br>　　at helper.JavascriptHelper.executeScript(JavascriptHelper.java:21)<br>　　at stepdefinitions.BUDGET_BudgetCreation.click_on_save_button(BUDGET_BudgetCreation.java:214)<br>　　at ?.click on save button(file:///C:/Users/inindc00076/git/AzentioAutomationFramework2/AzentioAutomationFramework/src/test/java/features/KUBS_BudgetDefinition.feature:14)<br>* Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)<br><br>screenshot<br><br> | PASSED | 0.336 s |
| 11 | Then Click on notification icon | SKIPPED | 0.001 s |
| 12 | And select the first record | SKIPPED | 0.002 s |
| 13 | Then click on submit button | SKIPPED | 0.001 s |
| 14 | And enter remark in alert tab | SKIPPED | 0.000 s |
| 15 | And click on submit | SKIPPED | 0.000 s |
| 16 | When click on submit button save the reviewer id | SKIPPED | 0.000 s |

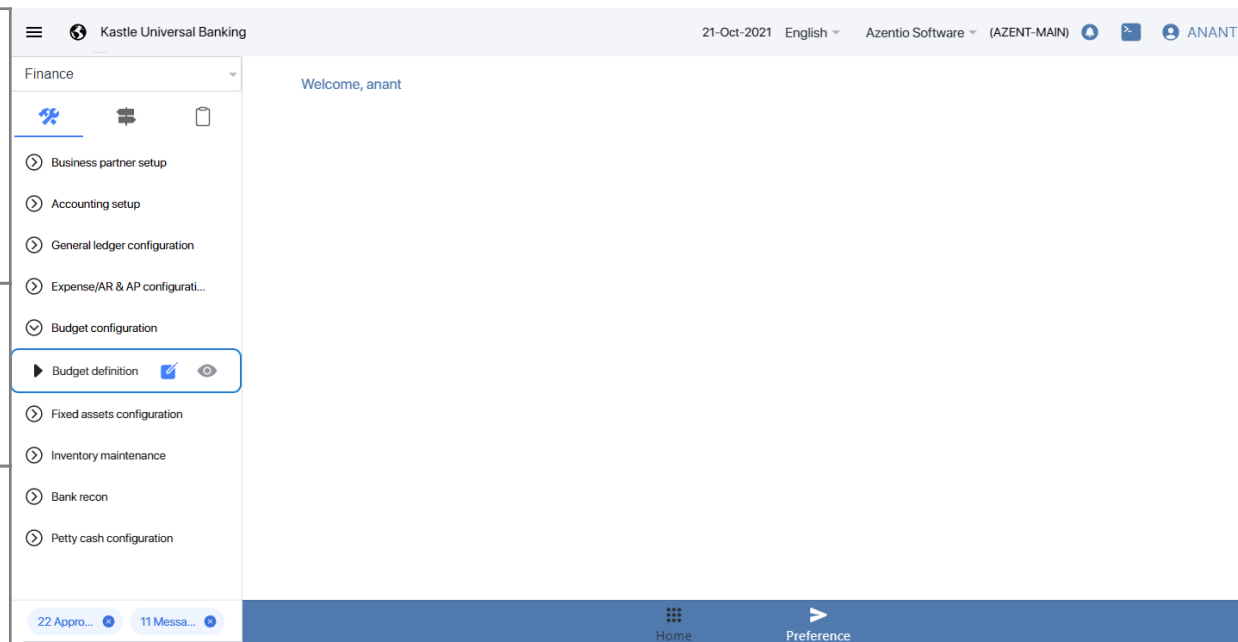| | |
|---|---|
| (Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario) |  |

(S) To verify maker can able to create budget code

(F) To check BudgetDefinition moduel feature

---

| | |
|---|---|
| (Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario) |  |

(S) To verify maker can able to create budget code

(F) To check BudgetDefinition moduel feature

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To verify maker can able to create budget code

(F) To check BudgetDefinition moduel feature



(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To verify maker can able to create budget code

(F) To check BudgetDefinition moduel feature

| | |
|---|---|
| (Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario) |  |
| (S) To verify maker can able to create budget code | |
| (F) To check BudgetDefinition moduel feature | |

| | |
|---|---|
| (Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario) |  |
| (S) To verify maker can able to create budget code | |
| (F) To check BudgetDefinition moduel feature | |

| | |
|---|---|
| (Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario) |  |
| (S) To verify maker can able to create budget code | |
| (F) To check BudgetDefinition moduel feature | |

| | |
|---|---|
| (Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario) |  |
| (S) To verify maker can able to create budget code | |
| (F) To check BudgetDefinition moduel feature | |

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) To verify maker can able to create budget code

(F) To check BudgetDefinition moduel feature



(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) To verify maker can able to create budget code

(F) To check BudgetDefinition moduel feature