

FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	To check BudgetDefinition moduel feature	1	1	0	0	16.476 s

SCENARIOS SUMMARY -- 3 --



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	To check BudgetDefinition moduel	To verify maker can able to search and view budget code	7	7	0	0	16.468 s
	feature						

DETAILED SECTION -- 4 --

(F)- To check BudgetDefinition moduel feature

PASSED	DURATION - 16.476 s	Scenarios		Steps	
		Total - 1		Total - 7	
/ 6:23:34.029 PM	Л // 6:23:50.505 PM /	Pass - 1	1	Pass - 7	7
		Fail - 0		Fail - 0	
		Skip - 0		Skip - 0	

(S)- To verify maker can able to search and view budget code

PASSED DURATION - 16.468 s	10	- - [-		 		 		-	 	 		 		 		 Ste	eps				
/ 6:23:34.037 PM // 6:23:50.505 PM /	8	╫		 		 	-	-	 :	 	+-	 	ŀ	 -		 То	tal - 7	1	\perp		
	6	1		 		 				 	1	 	Ξ.			Pa	.ss - 7		7	١	
To check BudgetDefinition moduel feature	2	╢		 	-	 	-	-	 	 		 	ļ.	 -		 Fa		١		4	
@Search_criteria	0	7	 _	 	-	 	-	1	 	 	÷	 -	<u> </u>	 -	_	 Sk	ip - 0				
			1		2			3	4		5		6	1	7						


#	Step / Hook Details	Status	Duration
1	Given navigate to URL and login as a maker and choose finance option	PASSED	10.915 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.374 s
	screenshot		
	© Control of the con		
2	Then click on budget configuration Menu	PASSED	0.133 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.239 s
	screenshot		


3 And click on action button in budget configuration AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) 4 And click on search icon AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) 5 Then enter the budget code to search AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) 5 Then enter the budget code to search AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) 5 Then enter the budget code to search AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) 5 Then select the budget code in the search result AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) 5 Then select the budget code in the search result AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario)	#	Step / Hook Details	Status	Duration
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 4 And click on search icon AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 5 Then enter the budget code to search AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 4 AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 5 Then enter the budget code to search AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 4 Then select the budget code in the search result AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)		0		
screenshot And click on search icon ATER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Then enter the budget code to search AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	3		PASSED	0.141 s
And click on search icon AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then enter the budget code to search AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.084 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.447 s
4 And click on search icon AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 5 Then enter the budget code to search AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions. HooksClass.addS		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then enter the budget code to search AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then select the budget code in the search result AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Dasset				
screenshot Then enter the budget code to search AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) Then select the budget code in the search result AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) PASSED 0.084 s PASSED 0.326 s	4	And click on search icon	PASSED	0.070 s
5 Then enter the budget code to search AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 6 Then select the budget code in the search result AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.163 s PASSED 0.212 s 0.212 s 0.212 s 0.212 s 0.212 s 0.212 s			PASSED	0.213 s
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 6 Then select the budget code in the search result AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.212 s 0.212 s PASSED 0.084 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.326 s		■ © Marchaneste Paragraphic Paragraphic		
Screenshot 6 Then select the budget code in the search result AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.084 s 0.326 s	5	Then enter the budget code to search	PASSED	0.163 s
6 Then select the budget code in the search result AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.326 s			PASSED	0.212 s
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.326 s		1		
	6	Then select the budget code in the search result	PASSED	0.084 s
screenshot		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.326 s
		screenshot]	


DETAILED SECTION -- 6 --

#	Step / Hook Details	Status	Duration
	# On the contraction of the cont		
7	And validate the submited record	PASSED	0.026 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.140 s
	screenshot		

EXPANDED SECTION -- 7

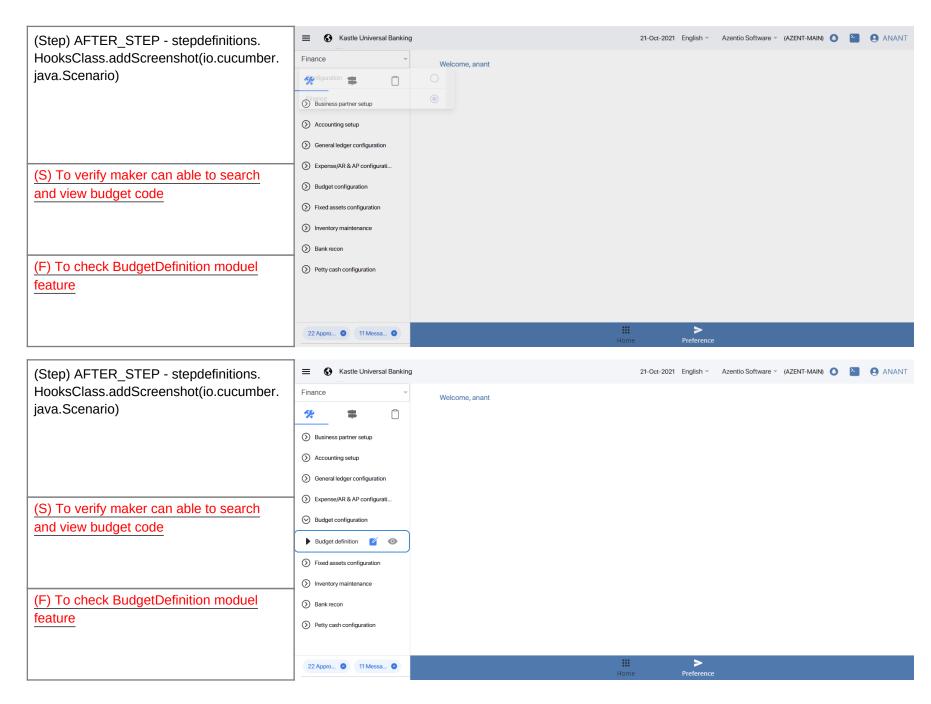

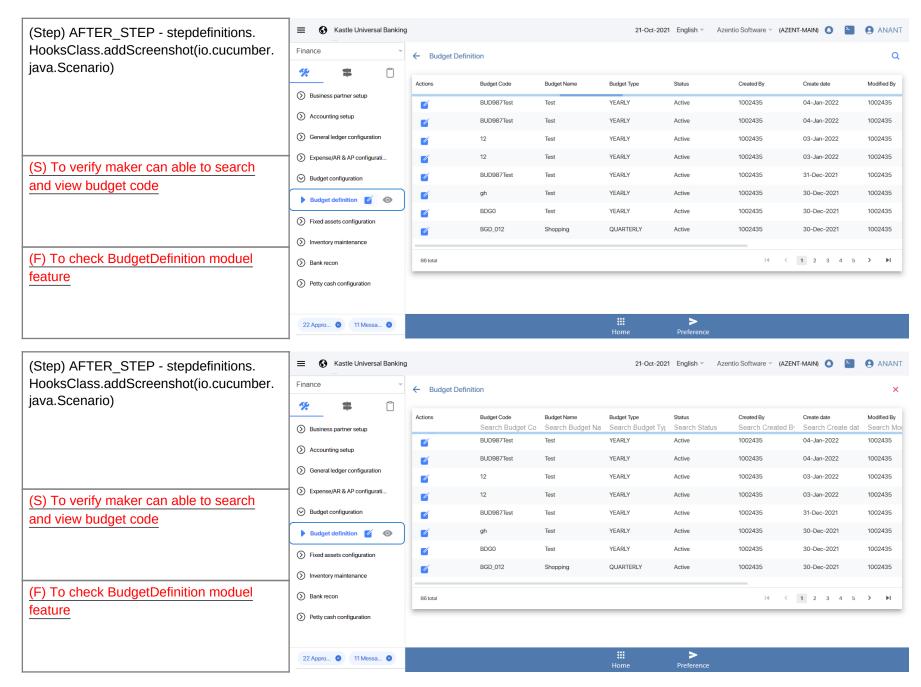

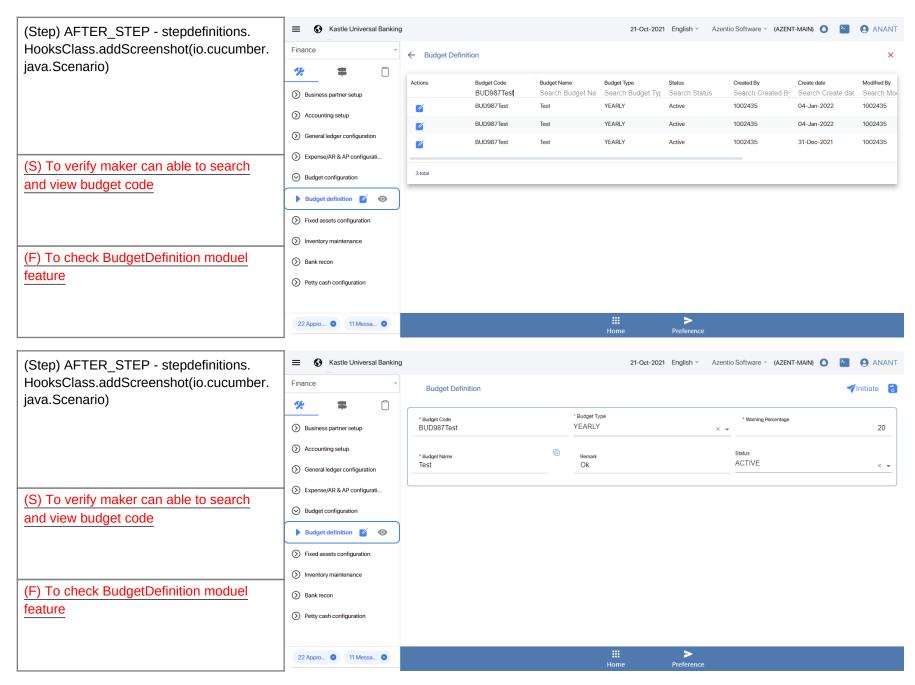

EXPANDED SECTION -- 10 --

