Cucumber Report

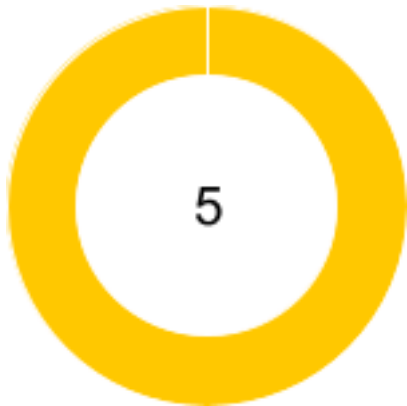| Start : Mar 08, 10:25:36.431 PM	End : Mar 08, 10:26:52.276 PM	Duration : 1 m 15.845 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 0 SKIPPED - 5

Features: 1

Scenarios: 1

Steps: 5

Pass %

#	Feature Name	T	P	F	S	Duration
1	_FIXED ASSETS_	1	0	1	0	1 m 15.845 s
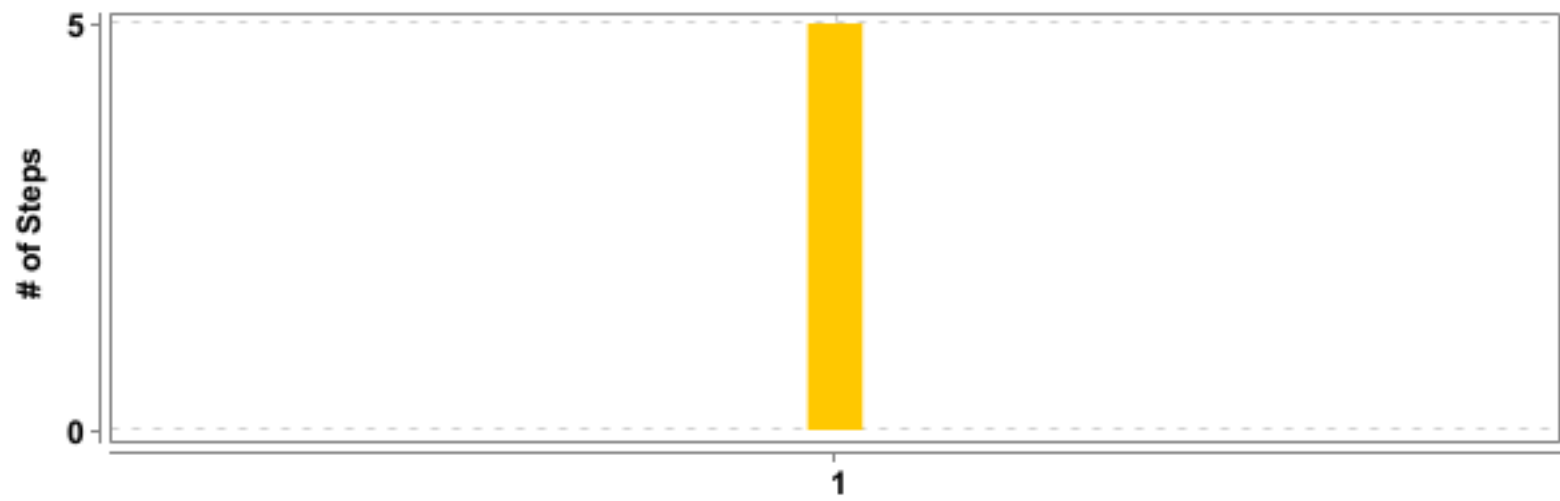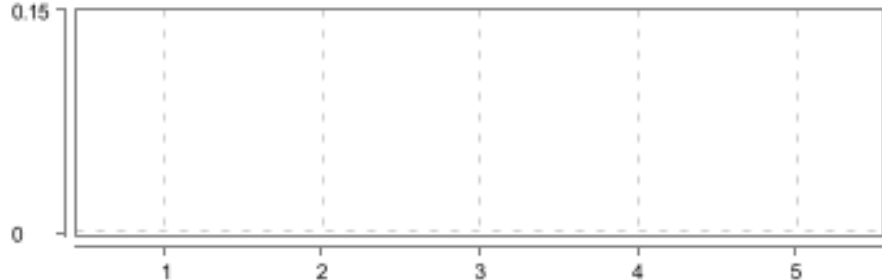
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	FIXED ASSETS	Check if the given asset is sold at higher price	5	0	0	5	1 m 15.840 s

(F)- FIXED ASSETS

FAILED	DURATION - 1 m 15.845 s	Scenarios		Steps	
/ 10:25:36.431 PM // 10:26:52.276 PM /		Total - 1		Total - 5	
		Pass - 0	1	Pass - 0	5
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 5	

(S)- Check if the given asset is sold at higher price

FAILED	DURATION - 1 m 15.840 s		Steps	
/ 10:25:36.436 PM // 10:26:52.276 PM /			Total - 5	
FIXED ASSETS			Pass - 0	5
			Fail - 0	
@KUBS_FAT_UAT_004_001			Skip - 5	

#	Step / Hook Details	Status	Duration
	BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario)	FAILED	1 m 15.575 s

	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: chrome not reachable Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}], desiredCapabilities=Capabilities {browserName: chrome, goog:chromeOptions: {args: [], extensions: []}}}]
	  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:126)
	  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:84)
	  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:62)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:156)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	  at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:244)
	  at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:166)
	  at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:89)
	  at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:99)
	  at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:86)
	  at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:41)		

#	Step / Hook Details	Status	Duration
	at resources.BaseClass.initializeDriver(BaseClass.java:28) at stepdefinitions.HooksClass.browserSetup(HooksClass.java:32)		
1	Given User should go to the kubs url and login as a maker user	SKIPPED	0.000 s
2	And user should navigate to fixed asset menu	SKIPPED	0.000 s
3	When click on eye button of asset sale	SKIPPED	0.000 s
4	Then click on first eye button to get the profit earned	SKIPPED	0.000 s
5	And maker should logout	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.036 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.close()" because "this.driver" is null at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		