Cucumber Report

Start : Feb 26, 12:58:38.488 pm	*End : Feb 26, 12:59:19.328 pm*	*Duration : 40.840 s*
Features	Scenarios	Steps

PASSED - 0	PASSED - 0	PASSED - 16
FAILED - 1	FAILED - 1	FAILED - 1
SKIPPED - 0	SKIPPED - 0	SKIPPED - 27

Features: 1

Scenarios: 1

Steps: 44

Pass %: 0 %

Pass %: 0 %

Pass %: 36 %
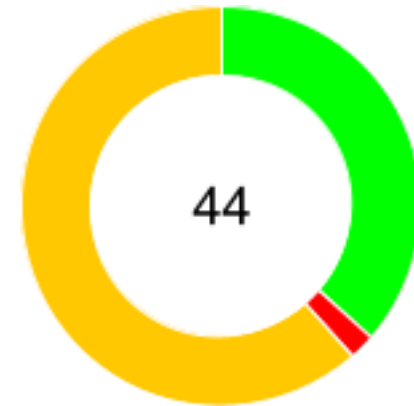
#	Feature Name	T	P	F	S	Duration
1	Check the Functionality of AR/AP Module	1	0	1	0	40.840 s
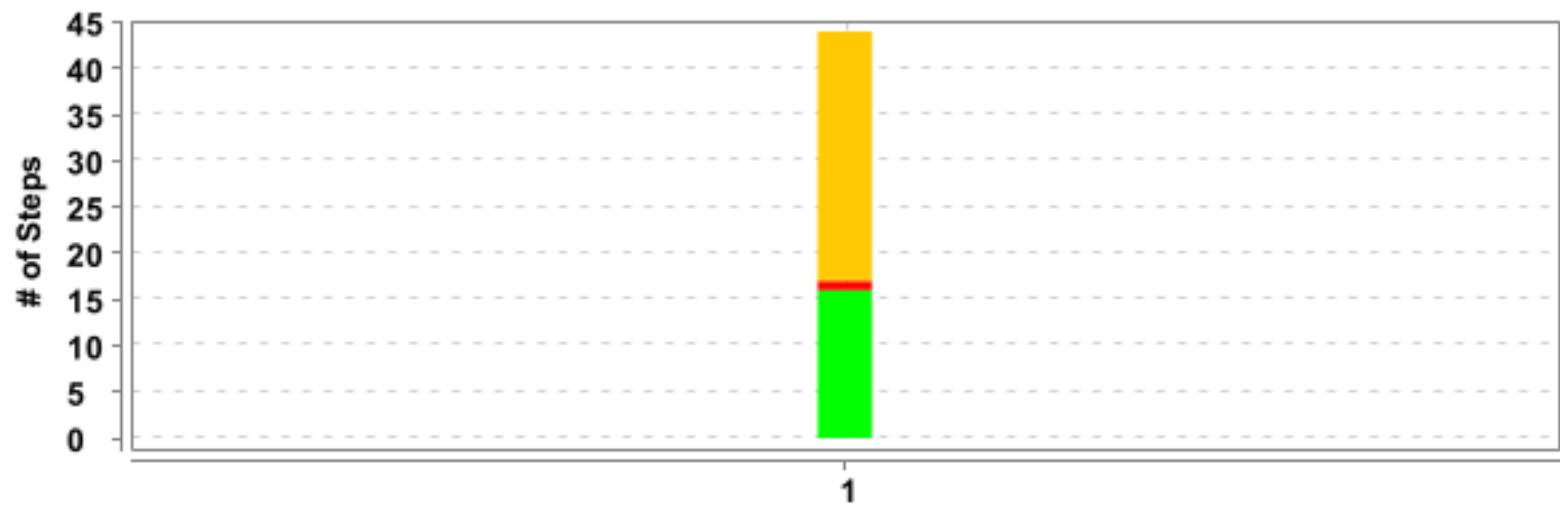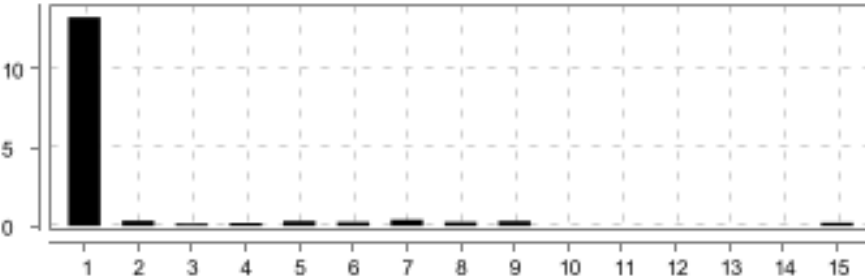
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the Functionality of AR/AP Module	Approving advance against PO	44	16	1	27	40.834 s

(F)- Check the Functionality of AR/AP Module

FAILED	DURATION - 40.840 s	Scenarios		Steps	
		Total - 1		Total - 44	
/ 12:58:38.488 pm // 12:59:19.328 pm /		Pass - 0	1	Pass - 16	44
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 27	

(S)- Approving advance against PO
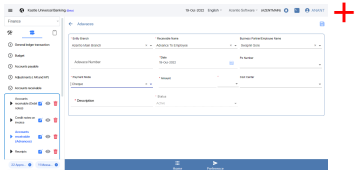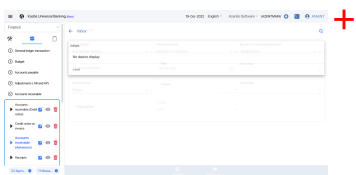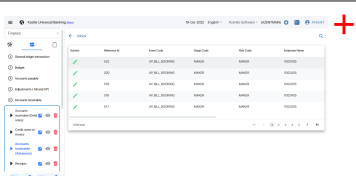
FAILED	DURATION - 40.834 s		Steps	
/ 12:58:38.494 pm // 12:59:19.328 pm /			Total - 44	
			Pass - 16	
Check the Functionality of AR/AP Module			Fail - 1	44
@KUBS_AR_AP_UAT_004_003_TC_01			Skip - 27	

#	Step / Hook Details	Status	Duration
1	Given Navigate The Azentio Url	PASSED	13.284 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.143 s
	screenshot		
2	Then Choose the second Tab Segment	PASSED	0.327 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.191 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	And Click On Main module Accounts Receivable	PASSED	0.138 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.216 s
	screenshot		
4	Then Click on Accounts Receive Advances Eye Icon	PASSED	0.196 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.435 s
	screenshot		
5	And Click Add icon button	PASSED	0.322 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.358 s
	screenshot		
6	Then Enter the Receivable Name	PASSED	0.245 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.172 s
	screenshot		

#	Step / Hook Details	Status	Duration
7	And Enter Business partner Value	PASSED	0.407 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.150 s
	screenshot		
8	Then Enter the PO Number	PASSED	0.243 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.194 s
	screenshot		
9	And Enter Payment mode	PASSED	0.316 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.163 s
	screenshot		
10	Then Enter Amount value	PASSED	0.001 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.411 s
	screenshot		

#	Step / Hook Details	Status	Duration
11	And Choose Needed Currancy	PASSED	0.000 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.164 s
	screenshot		
12	Then Choose cost center	PASSED	0.000 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.135 s
	screenshot		
13	And Enter Description value	PASSED	0.000 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.106 s
	screenshot		
14	Then Save the Advance Record	PASSED	0.001 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.121 s
	screenshot		

#	Step / Hook Details	Status	Duration
15	Then Goto The Notification Icon	PASSED	0.200 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.231 s
	screenshot		
16	And Store the Referance Id and Open the Record	PASSED	0.752 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.342 s
	screenshot		
17	Then Click submit button and Enter Remark submit it	FAILED	4.905 s

	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=98.0.4758.102) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014547', ip: '10.1.47.111', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [55f787d60d3e23a48a31c1cb1526befe, findElement {using=xpath, value=//span[contains(text(),'Submit')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 98.0.4758.102, chrome: {chromedriverVersion: 98.0.4758.80 (7f0488e8ba0d8..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:57155}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:57155/devtoo..., se:cdpVersion: 98.0.4758.102, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 55f787d60d3e23a48a31c1cb1526befe
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		

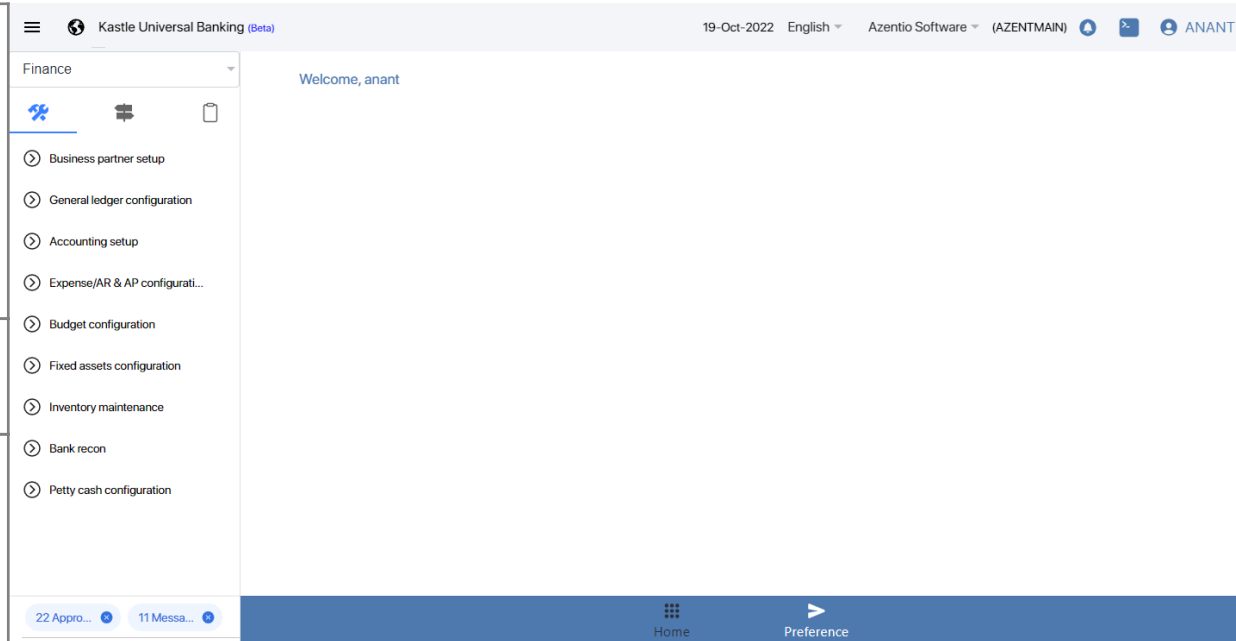| #	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		
	at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)		
	at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373)		
	at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70)		
	at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39)		
	at jdk.proxy2/jdk.proxy2.$Proxy46.isDisplayed(Unknown Source)		
	at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:307)		
	at org.openqa.selenium.support.ui.ExpectedConditions.access$000(ExpectedConditions.java:40)		
	at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:293)		
	at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:290)		
	at org.openqa.selenium.support.ui.ExpectedConditions$23.apply(ExpectedConditions.java:660)		
	at org.openqa.selenium.support.ui.ExpectedConditions$23.apply(ExpectedConditions.java:656)		
	at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:208)		
	at helper.WaitHelper.waitForElement(WaitHelper.java:79)		
	at stepdefinitions.ARAP_CancellationOfGRN.click_submit_button_and_enter_remark_submit_it(ARAP_CancellationOfGRN.java:757)		
	at ?.Click submit button and Enter Remark submit it(file:///C:/Users/inindc00075/git/repository/Arshath_Azentio_AutomationFramework/src/test/java/features/ARAP_GrnCancellation.feature:186)		
	* Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	FAILED	12.147 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=98.0.4758.102) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014547', ip: '10.1.47.111', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [55f787d60d3e23a48a31c1cb1526befe, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 98.0.4758.102, chrome: {chromedriverVersion: 98.0.4758.80 (7f0488e8ba0d8..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:57155}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:57155/devtoo..., se:cdpVersion: 98.0.4758.102, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 55f787d60d3e23a48a31c1cb1526befe		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347) at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		
18	Given Navigate as a Reviewer	SKIPPED	0.001 s
19	Then click on Notify icon	SKIPPED	0.000 s
20	And Click First record Action icon	SKIPPED	0.001 s
21	Then Approve the record in Reviewer	SKIPPED	0.000 s
22	And Give Remark and Submit	SKIPPED	0.001 s
23	Given Navigate as a Checker	SKIPPED	0.001 s
24	Then Click module security management	SKIPPED	0.001 s
25	And Claim the Record in Checker	SKIPPED	0.000 s
26	Then Goto the Checker notification Icon	SKIPPED	0.000 s
27	And Click the First Action Icon	SKIPPED	0.000 s
28	Then Approve the Record in checker stage	SKIPPED	0.001 s
29	And Give the Remark and Submit it	SKIPPED	0.001 s
30	Given Navigate The Azentio Url	SKIPPED	0.001 s
31	Then Choose the second Tab Segment	SKIPPED	0.001 s
32	And Click On Main module Accounts Receivable	SKIPPED	0.000 s
33	Then Click on Accounts Receive Advances Eye Icon	SKIPPED	0.000 s
34	And Click On Search Icon	SKIPPED	0.000 s
35	Then Enter Active Value In Advance Status	SKIPPED	0.000 s
36	Then Click on Table Row First Eye Icon	SKIPPED	0.000 s
37	And Get The Business Partner and Advance Number	SKIPPED	0.000 s
38	And Click On Main module Accounts payable	SKIPPED	0.000 s
39	Then Click sub module Payment settlement Eye Icon	SKIPPED	0.000 s
40	And Click Add icon button	SKIPPED	0.000 s
41	Then Enter payment option	SKIPPED	0.000 s
42	And Give stored Business partner Name	SKIPPED	0.001 s
43	Then Choose value date as System current date	SKIPPED	0.000 s
44	And find the Advance reference number for Active Advances is availabe at the billing queue	SKIPPED	0.001 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.218 s

#	Step / Hook Details	Status	Duration

	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=98.0.4758.102) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014547', ip: '10.1.47.111', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [55f787d60d3e23a48a31c1cb1526befe, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 98.0.4758.102, chrome: {chromedriverVersion: 98.0.4758.80 (7f0488e8ba0d8..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:57155}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:57155/devtoo..., se:cdpVersion: 98.0.4758.102, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 55f787d60d3e23a48a31c1cb1526befe
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)
	   at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432)
	   at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Approving advance against PO	
(F) Check the Functionality of AR/AP Module	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Approving advance against PO	
(F) Check the Functionality of AR/AP Module	

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Approving advance against PO

(F) Check the Functionality of AR/AP
Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Approving advance against PO

(F) Check the Functionality of AR/AP
Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Approving advance against PO

(F) Check the Functionality of AR/AP Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Approving advance against PO

(F) Check the Functionality of AR/AP Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Approving advance against PO

(F) Check the Functionality of AR/AP Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Approving advance against PO

(F) Check the Functionality of AR/AP Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Approving advance against PO	
(F) Check the Functionality of AR/AP Module	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Approving advance against PO	
(F) Check the Functionality of AR/AP Module	

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Approving advance against PO

(F) Check the Functionality of AR/AP
Module

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Approving advance against PO

(F) Check the Functionality of AR/AP
Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Approving advance against PO

(F) Check the Functionality of AR/AP Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Approving advance against PO

(F) Check the Functionality of AR/AP Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Approving advance against PO

(F) Check the Functionality of AR/AP Module

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Approving advance against PO

(F) Check the Functionality of AR/AP Module