


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	Check the Functionality of Inventory	2	0	2	0	3 m 15.886 s

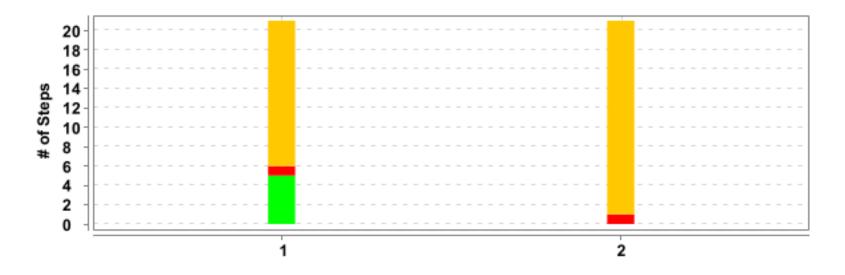


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the Functionality of Inventory	Create a contract	21	5	1	15	2 m 45.548 s
2	Check the Functionality of Inventory	Create a contract	21	0	1	20	30.255 s

DETAILED SECTION -- 4 --

(F)- Check the Functionality of Inventory

FAILED	DURATION - 3 m 15.886 s	Scenarios		Steps	
		Total - 2		Total - 42	
/ 12:06:39.495	AM // 12:09:55.381 AM /	Pass - 0	2	Pass - 5	42
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 35	

(S)- Create a contract

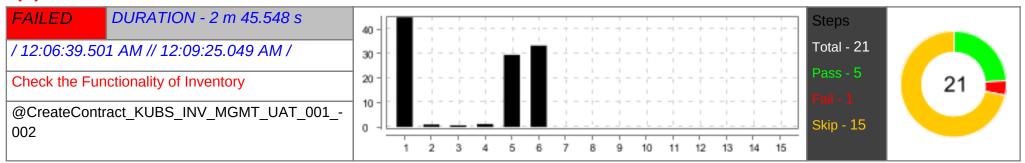

#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	PASSED	44.827 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	2.005 s
	screenshot		
	The distribution of the state o		
2	And user should navigate to accounts payable menu	PASSED	1.001 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.302 s
	screenshot		

#	Step / Hook Details	Status	Duration
	To any other control of the control		
3	When click on eye button of vendor contract	PASSED	0.663 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot +	PASSED	0.310 s
4	And click on add button to create contract	PASSED	1.228 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	1.195 s
	Screenshot ***Particular and the state of		
5	And Fill the required fields to create contract	PASSED	29.488 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot **Tex_Step - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)* **Tex_Step - step -	PASSED	0.376 s
6	Then Save and submit the creation contract record	FAILED	33.325 s
	org.openqa.selenium.JavascriptException: javascript error: Cannot read properties of null (reading 'shadowRoot') (Session info: chrome=100.0.4896.60) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [4e36767618d789e898935d4fbbe0a602, executeScript {script=return document.querySelector("ion-toast").shadowRoot. querySelector("div[class='toast-message']").innerText, args=[]}] Capabilities {acceptInsecureCerts: false, browserName: chrome,		

#	Step / Hook Details	Status	Duration
	browserVersion: 100.0.4896.60, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5, userDataDir: C:\Users\ININDC-1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:55375}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:55375/devtoo, se:cdpVersion: 100.0.4896.60, setWindowRect: true, strictFielnteractability: false, timeoust: (pageLoad). pageLoad: 30000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 4e36767618d789e89893504fbbe0a602 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:490) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(PttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:547) at		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.297 s
	screenshot *** *** *** *** *** *** *** *** ***		
7	And User should go to the kubs url and login as a reviewer user	SKIPPED	0.002 s
8	Then Click on notification button in reviewer	SKIPPED	0.000 s
9	And approve the record by reviewer user	SKIPPED	0.000 s
10	Given User should go to the kubs url and login as a checker user	SKIPPED	0.000 s
11	And Click on security management in checker	SKIPPED	0.000 s
12	Then Click on open pool in checker	SKIPPED	0.000 s
13	And Click on claim button in checker	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
14	And capture claimed status	SKIPPED	0.001 s
15	Then click on notification in checker	SKIPPED	0.001 s
16	Then checker should approved the contract record	SKIPPED	0.000 s
17	Given User should go to the kubs url and login as a maker user	SKIPPED	0.000 s
18	And user should navigate to accounts payable menu	SKIPPED	0.000 s
19	When click on eye button of vendor contract	SKIPPED	0.000 s
20	Then click on first eye button to get the unique contract code	SKIPPED	0.000 s
21	And maker should logout	SKIPPED	0.000 s

(S)- Create a contract

FAILED DURATION - 30.255 s	10 - To - T	
/ 12:09:25.126 AM // 12:09:55.381 AM /	8 - Total - 21	
Check the Functionality of Inventory	6 - Pass - 0	21
@CreateContract_KUBS_INV_MGMT_UAT_00 002	2	
002	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15	

#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	FAILED	10.392 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=100.0.4896.60) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [8565dc088521d19bc8c36ba4f66cfa29, findElement {using=xpath, value=//input[@name='username']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.60, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:55462}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:55462/devtoo, se:cdpVersion: 100.0.4896.60, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 8565dc088521d19bc8c36ba4f66cfa29 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:133)		


#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation.findElement[ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy46.isDisplayed(Unknown Source) at org.openqa.selenium.support.ui.ExpectedConditions.elementf(Visible(ExpectedConditions.java:307) at org.openqa.selenium.support.ui.ExpectedConditions.selementf(Visible(ExpectedConditions.java:40) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:290) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:290) at org.openqa.selenium.support.ui.ExpectedConditions\$23.apply(ExpectedConditions.java:660) at org.openqa.selenium		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=100.0.4896.60) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [8565dc088521d19bc8c36ba4f66cfa29, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.60, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5, userDataDir: C:UserslNINDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:55462}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:55462/devtoo, se:cdpVersion: 100.0.4896.60, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:virtualAuthenticators: true} Session ID: 8565dc088521d19bc8c36ba4f66cfa29 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:133)	FAILED	12.028 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347) at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		
2	And user should navigate to accounts payable menu	SKIPPED	0.001 s
3	When click on eye button of vendor contract	SKIPPED	0.000 s
4	And click on add button to create contract	SKIPPED	0.000 s
5	And Fill the required fields to create contract	SKIPPED	0.000 s
6	Then Save and submit the creation contract record	SKIPPED	0.000 s
7	And User should go to the kubs url and login as a reviewer user	SKIPPED	0.000 s
8	Then Click on notification button in reviewer	SKIPPED	0.000 s
9	And approve the record by reviewer user	SKIPPED	0.001 s
10	Given User should go to the kubs url and login as a checker user	SKIPPED	0.000 s
11	And Click on security management in checker	SKIPPED	0.000 s
12	Then Click on open pool in checker	SKIPPED	0.000 s
13	And Click on claim button in checker	SKIPPED	0.000 s
14	And capture claimed status	SKIPPED	0.000 s
15	Then click on notification in checker	SKIPPED	0.000 s
16	Then checker should approved the contract record	SKIPPED	0.000 s
17	Given User should go to the kubs url and login as a maker user	SKIPPED	0.001 s
18	And user should navigate to accounts payable menu	SKIPPED	0.000 s
19	When click on eye button of vendor contract	SKIPPED	0.000 s
20	Then click on first eye button to get the unique contract code	SKIPPED	0.000 s
21	And maker should logout	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.231 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=100.0.4896.60) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [8565dc088521d19bc8c36ba4f66cfa29, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.60, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:55462}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:55462/devtoo, se:cdpVersion: 100.0.4896.60, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true,		


DETAILED SECTION -- 10 --

#	Step / Hook Details	Status	Duration
	webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 8565dc088521d19bc8c36ba4f66cfa29		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)		
	at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432)		
	at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		

EXPANDED SECTION -- 11 --

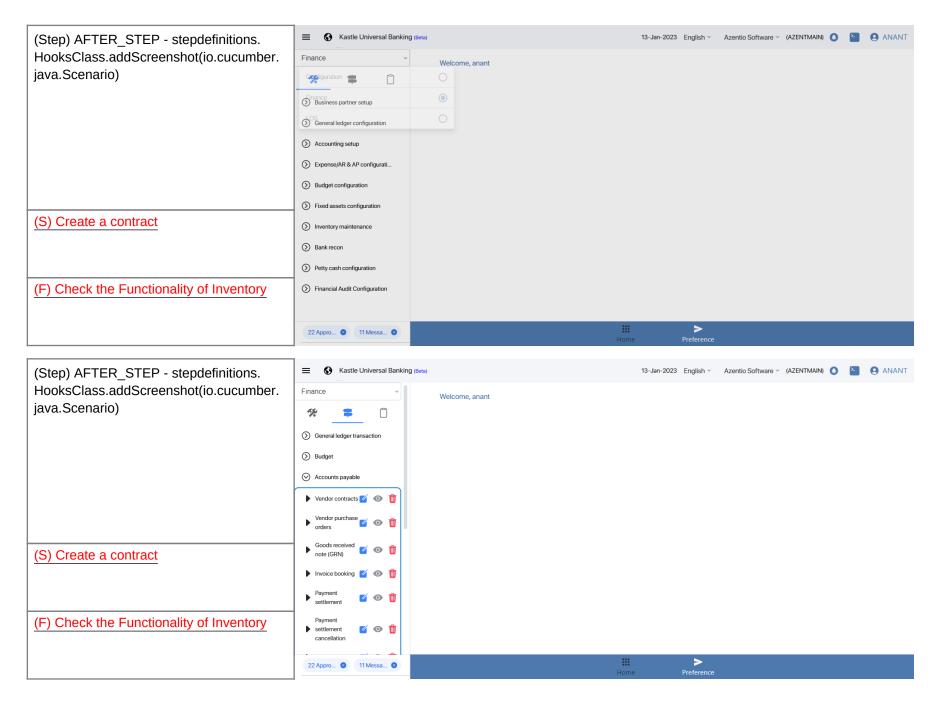

EXPANDED SECTION -- 12 --

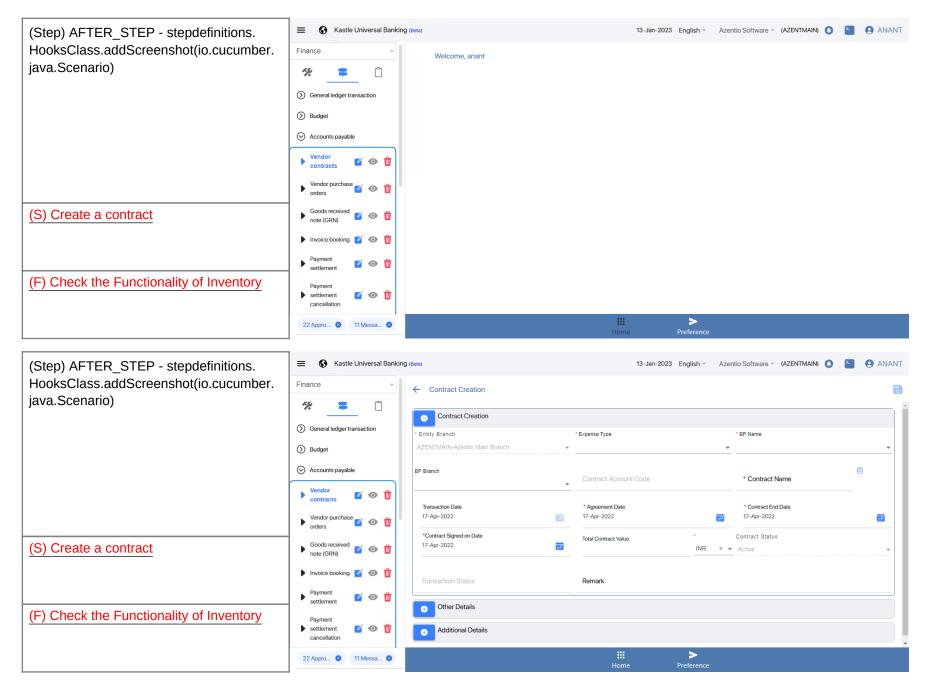

EXPANDED SECTION -- 13 --

