Cucumber Report

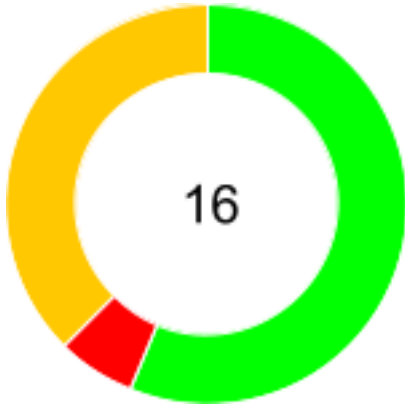| Start : Jan 12, 1:15:49.779 PM	End : Jan 12, 1:16:09.129 PM	Duration : 19.350 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 9 FAILED - 1 SKIPPED - 6

#	Feature Name	T	P	F	S	Duration
1	To check BudgetDefinition moduel feature	1	0	1	0	19.350 s
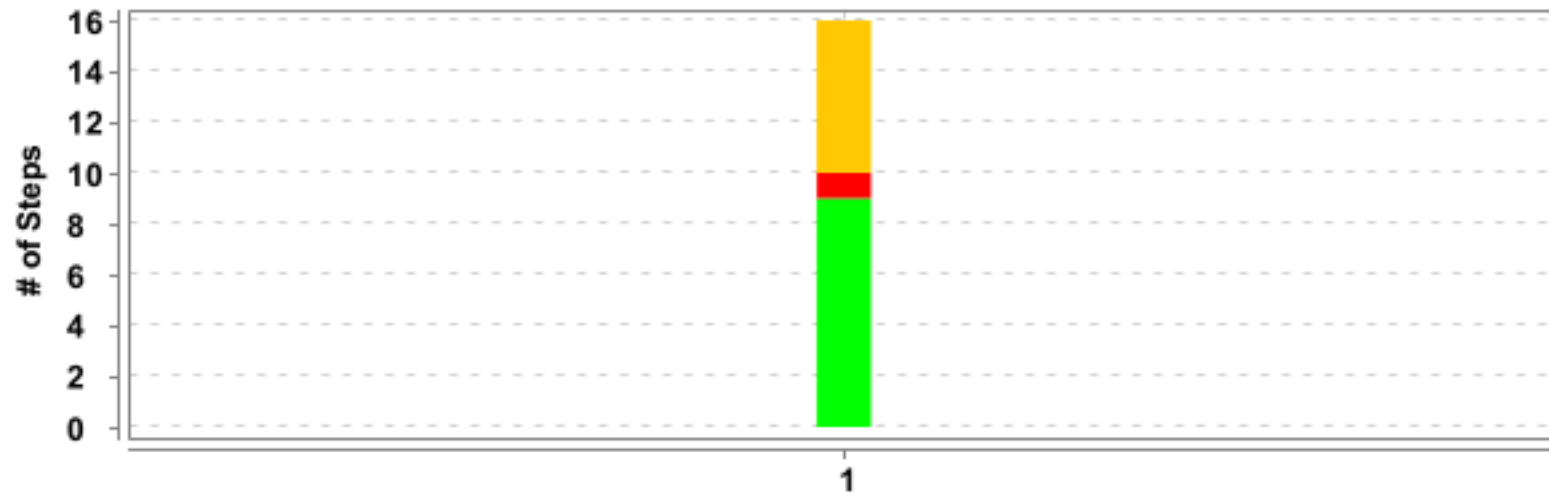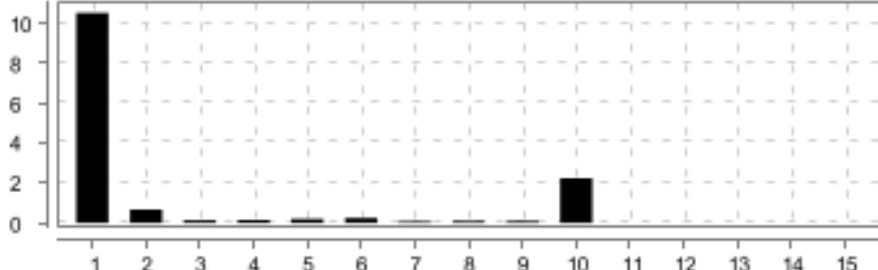
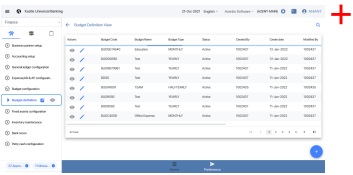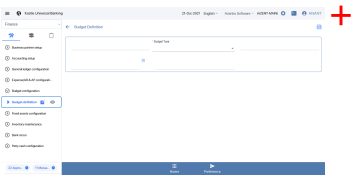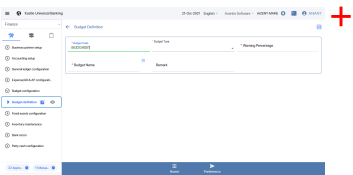| #	Feature Name	Scenario Name	T	P	F	S	Duration
1	To check BudgetDefinition moduel feature	To verify maker can able to create budget code	16	9	1	6	19.344 s

(F)- To check BudgetDefinition moduel feature
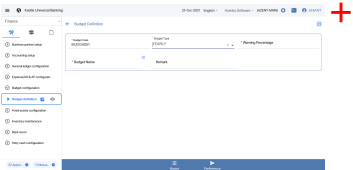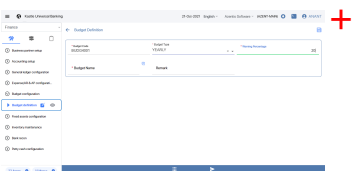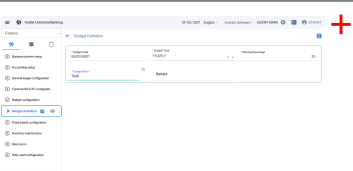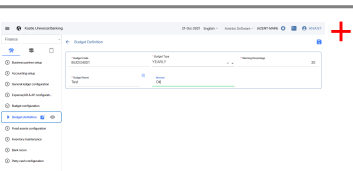
FAILED	*DURATION - 19.350 s*		Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 16 Pass - 9 Fail - 1 Skip - 6	
/ 1:15:49.779 PM // 1:16:09.129 PM /						
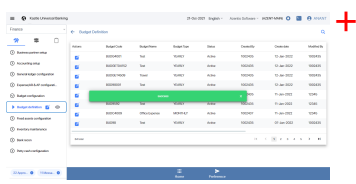
(S)- To verify maker can able to create budget code

FAILED	*DURATION - 19.344 s*		Steps Total - 16 Pass - 9 Fail - 1 Skip - 6	
/ 1:15:49.785 PM // 1:16:09.129 PM /				
To check BudgetDefinition moduel feature				
@Maker_MultiAuth				

#	Step / Hook Details	Status	Duration
1	Given navigate to URL and login as a maker and choose finance option	PASSED	10.501 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.233 s
	screenshot		
2	Then click on budget configuration Menu	PASSED	0.663 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.205 s
	screenshot		

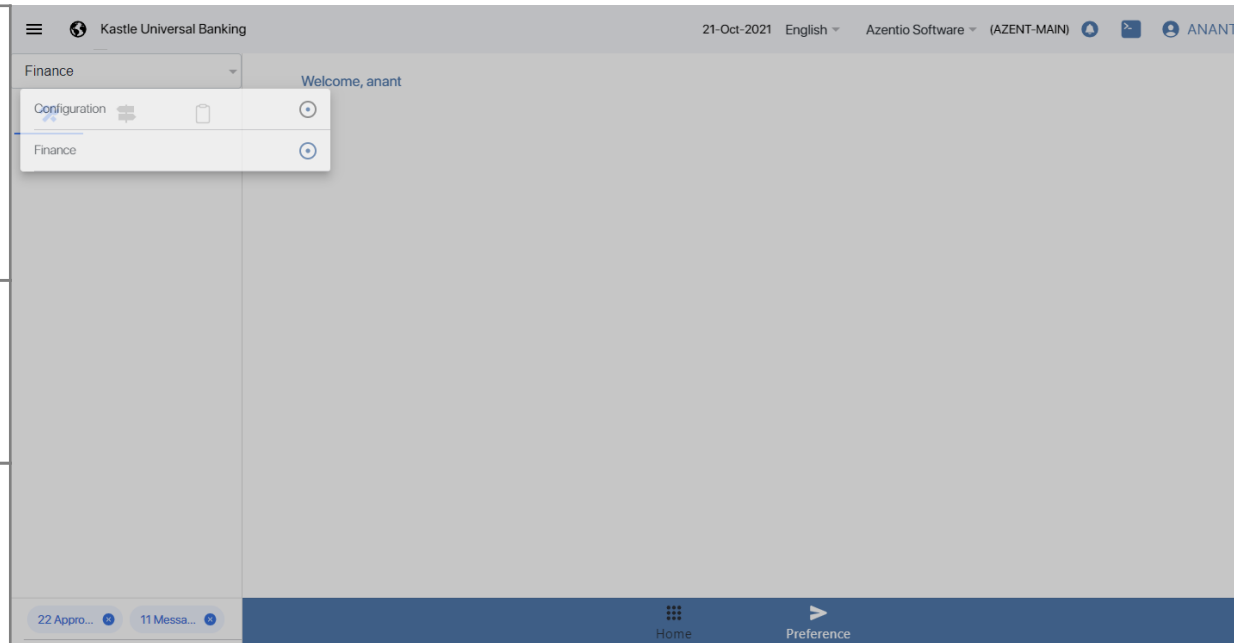| #	Step / Hook Details	Status	Duration
3	And click on budget definition sub menu and click on eye icon	PASSED	0.140 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.458 s
	screenshot		
4	And click on add icon	PASSED	0.151 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.276 s
	screenshot		
5	Then enter budget code	PASSED	0.200 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.164 s
	screenshot		
6	And enter budget type	PASSED	0.243 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.136 s
	screenshot		

#	Step / Hook Details	Status	Duration
7	And enter warning percentage	PASSED	0.082 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.194 s
	screenshot		
8	And enter budget name	PASSED	0.098 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.194 s
	screenshot		
9	Then give remark	PASSED	0.103 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.275 s
	screenshot		
10	Then click on save button	FAILED	2.242 s
	org.openqa.selenium.JavascriptException: javascript error: Invalid or unexpected token (Session info: chrome=96.0.4664.45) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014584', ip: '10.1.47.109', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [aba35b5cc02327ae696fd9c849796375, executeScript {script=return document.querySelector('ion-toast').shadowRoot. querySelector('div[class=toast-message]')')), args=[]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion:		

#	Step / Hook Details	Status	Duration

	96.0.4664.45, chrome: {chromedriverVersion: 96.0.4664.45 (76e4c1bb2ab46..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:64460}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:64460/devtoo..., se:cdpVersion: 96.0.4664.45, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: aba35b5cc02327ae696fd9c849796375
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	  at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:481)
	  at helper.JavascriptHelper.executeScript(JavascriptHelper.java:21)
	  at stepdefinitions.BUDGET_BudgetCreation.click_on_save_button(BUDGET_BudgetCreation.java:219)
	  at ?.click on save button(file:///C:/Users/inindc00076/git/AzentioAutomationFramework2/AzentioAutomationFramework/src/test/java/features/KUBS_BudgetDefinition.feature:14)
	* Not displayable characters are replaced by '?'.		

	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.115 s
11	Then Click on notification icon	SKIPPED	0.000 s
12	And select the first record	SKIPPED	0.000 s
13	Then click on submit button	SKIPPED	0.000 s
14	And enter remark in alert tab	SKIPPED	0.000 s
15	And click on submit	SKIPPED	0.000 s
16	When click on submit button save the reviewer id	SKIPPED	0.000 s

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

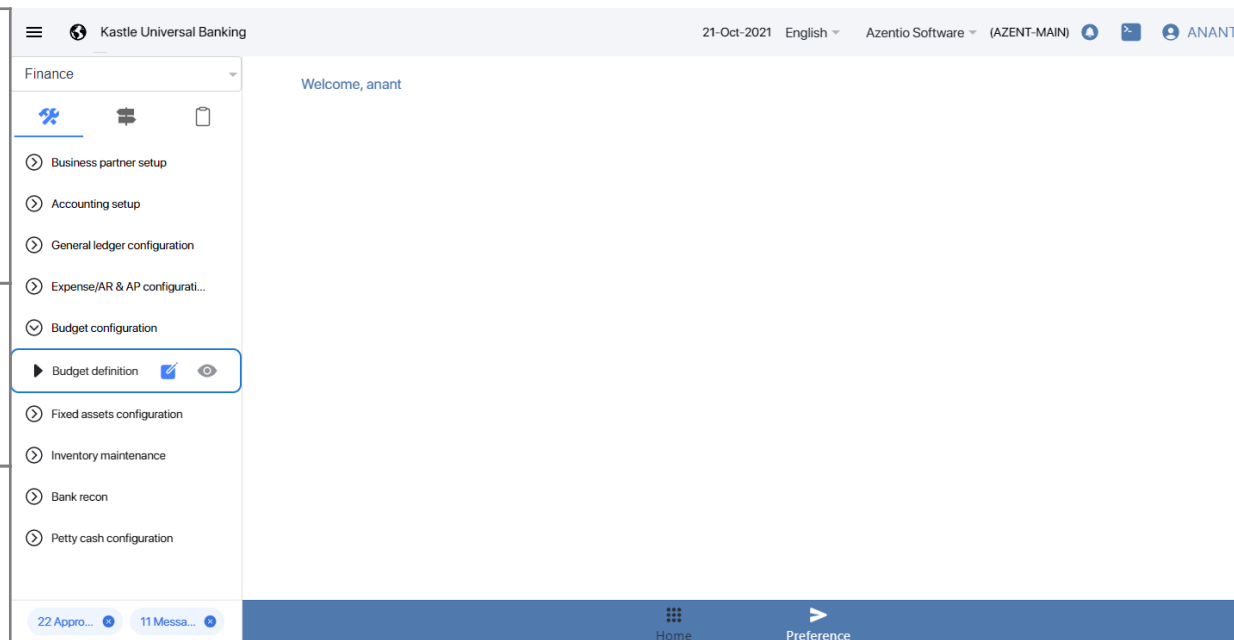(S) To verify maker can able to create budget code

(F) To check BudgetDefinition moduel feature

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) To verify maker can able to create budget code

(F) To check BudgetDefinition moduel feature

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cumber.
java.Scenario)

(S) To verify maker can able to create budget code

(F) To check BudgetDefinition moduel feature

	Kastle Universal Banking				21-Oct-2021	English	Azentio Software	(AZENT-MAIN)	ANANT

Finance

Business partner setup
Accounting setup
General ledger configuration
Expense/AR & AP configurati...
Budget configuration
Budget definition
Fixed assets configuration
Inventory maintenance
Bank recon
Petty cash configuration

← Budget Definition View

Actions	Budget Code	Budget Name	Budget Type	Status	Created By	Create date	Modified By
👁 ✎	BUDGET4540	Education	MONTHLY	Active	1002437	12-Jan-2022	1002437
👁 ✎	BUDG0090	Test	YEARLY	Active	1002437	12-Jan-2022	1002437
👁 ✎	BUD9870981	Test	YEARLY	Active	1002437	11-Jan-2022	1002437
👁 ✎	BDG0	Test	YEARLY	Active	1002437	11-Jan-2022	1002437
👁 ✎	BUDAR001	TEAM	HALFYEARLY	Active	1002435	11-Jan-2022	1002435
👁 ✎	BUD9592	Test	YEARLY	Active	1002437	11-Jan-2022	1002437
👁 ✎	BGD9592	Test	YEARLY	Active	1002437	11-Jan-2022	1002437
👁 ✎	BUDC4006	Office Expense	MONTHLY	Active	1002437	11-Jan-2022	1002437

67 total |◄ ◄ 1 2 3 4 5 ► ►|

22 Appro... ✕   11 Messa... ✕

Home   Preference

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cumber.
java.Scenario)

(S) To verify maker can able to create budget code

(F) To check BudgetDefinition moduel feature

	Kastle Universal Banking				21-Oct-2021	English	Azentio Software	(AZENT-MAIN)	ANANT

Finance

Business partner setup
Accounting setup
General ledger configuration
Expense/AR & AP configurati...
Budget configuration
Budget definition
Fixed assets configuration
Inventory maintenance
Bank recon
Petty cash configuration

← Budget Definition

* Budget Type

22 Appro... ✕   11 Messa... ✕

Home   Preference

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) To verify maker can able to create budget code	
(F) To check BudgetDefinition moduel feature	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) To verify maker can able to create budget code	
(F) To check BudgetDefinition moduel feature	

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To verify maker can able to create budget code

(F) To check BudgetDefinition moduel feature

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To verify maker can able to create budget code

(F) To check BudgetDefinition moduel feature

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To verify maker can able to create budget code

(F) To check BudgetDefinition moduel feature

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To verify maker can able to create budget code

(F) To check BudgetDefinition moduel feature