Cucumber Report

Start : Jan 09, 5:27:17.142 PM	End : Jan 09, 5:29:39.439 PM	Duration : 2 m 22.297 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 7
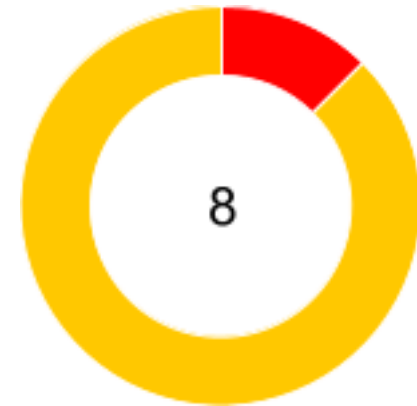
#	Feature Name	T	P	F	S	Duration
1	AR_AP Module	1	0	1	0	2 m 22.297 s
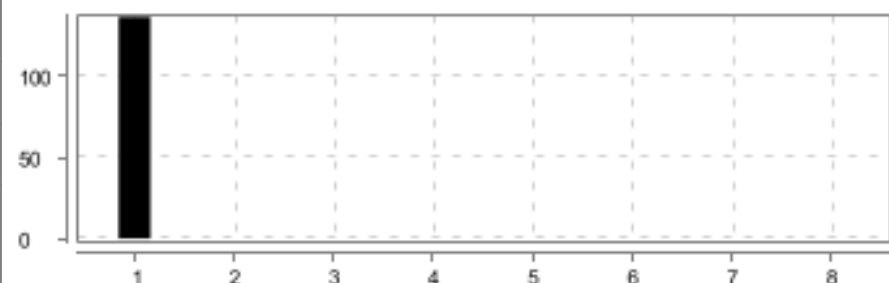
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	AR_AP Module	Checking of downloaded payment files for online payment where create file basis is Bank Wise	8	0	1	7	2 m 22.291 s

(F)- AR_AP Module

FAILED	DURATION - 2 m 22.297 s		Scenarios		Steps	
/ 5:27:17.142 PM // 5:29:39.439 PM /			Total - 1	1	Total - 8	8
			Pass - 0		Pass - 0	
			Fail - 1		Fail - 1	
			Skip - 0		Skip - 7	

(S)- Checking of downloaded payment files for online payment where create file basis is Bank Wise

FAILED	DURATION - 2 m 22.291 s		Steps	
/ 5:27:17.148 PM // 5:29:39.439 PM /			Total - 8	8
AR_AP Module			Pass - 0	
@blocker @AR/AP			Fail - 1	
@KUBS_AR_AP_UAT_008_002_TC_01			Skip - 7	

#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	FAILED	2 m 16.397 s

	org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//input[@name='username']"} (Session info: chrome=108.0.5359.125) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.150', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.4.1' Driver info: org.openqa. selenium.chrome.ChromeDriver Command: [b7f276f8b9878327e3a7efe16f91c919, findElement {using=xpath, value=//input[@name='username']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 108.0.5359.125, chrome: {chromedriverVersion: 108.0.5359.71 (1e0e3868ee06..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:51999}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:51999/devtoo..., se:cdpVersion: 108.0.5359.125, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: b7f276f8b9878327e3a7efe16f91c919
	
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		
	at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)		
	at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373)		
	at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70)		
	at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39)		
	at jdk.proxy2/jdk.proxy2.$Proxy46.sendKeys(Unknown Source)		
	at stepdefinitions.KUBS_Login.loginToAzentioAppByMaker(KUBS_Login.java:42)		
	at stepdefinitions.ACCOUNTSPAYABLE_VendorContracts. user_should_go_to_the_kubs_url_and_login_as_a_maker_user(ACCOUNTSPAYABLE_VendorContracts.java:49)		
	at ?.User should go to the kubs url and login as a maker user(file:///C:/Users/ININDC00075/git/Arshath_Excel_AzentioAutomationFramework/ AzentioAutomationFramework_ARAP_Excel_Arshath/src/test/java/features/ArAp2.feature:817)		
	* Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.368 s
	screenshot		
	+		
2	And click on arap configuration main menu	SKIPPED	0.001 s
3	And click on payment file generation setup sub menu	SKIPPED	0.002 s
4	And user update the Excel sheet testdata for online payment	SKIPPED	0.000 s
5	And configure the file format as Bank Wise	SKIPPED	0.001 s
6	And save the arap configure record	SKIPPED	0.000 s
7	Then Click on Update Deposited Cheque Notification	SKIPPED	0.000 s
8	And Select and Submit the Update Deposited Cheque recordssss	SKIPPED	0.000 s

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Checking of downloaded payment
files for online payment where create file
basis is Bank Wise

(F) AR_AP Module