Cucumber Report

Start : Jan 09, 12:57:23.104 PM

End : Jan 09, 12:58:11.819 PM

Duration : 48.715 s

Features	Scenarios	Steps
PASSED - 0	PASSED - 0	PASSED - 2
FAILED - 1	FAILED - 1	FAILED - 1
SKIPPED - 0	SKIPPED - 0	SKIPPED - 4

1

1

7

0 %

0 %

28 %

Pass %

Pass %

Pass %

#	Feature Name	T	P	F	S	Duration
1	*Check the Functionality of Inventory*	1	0	1	0	48.715 s
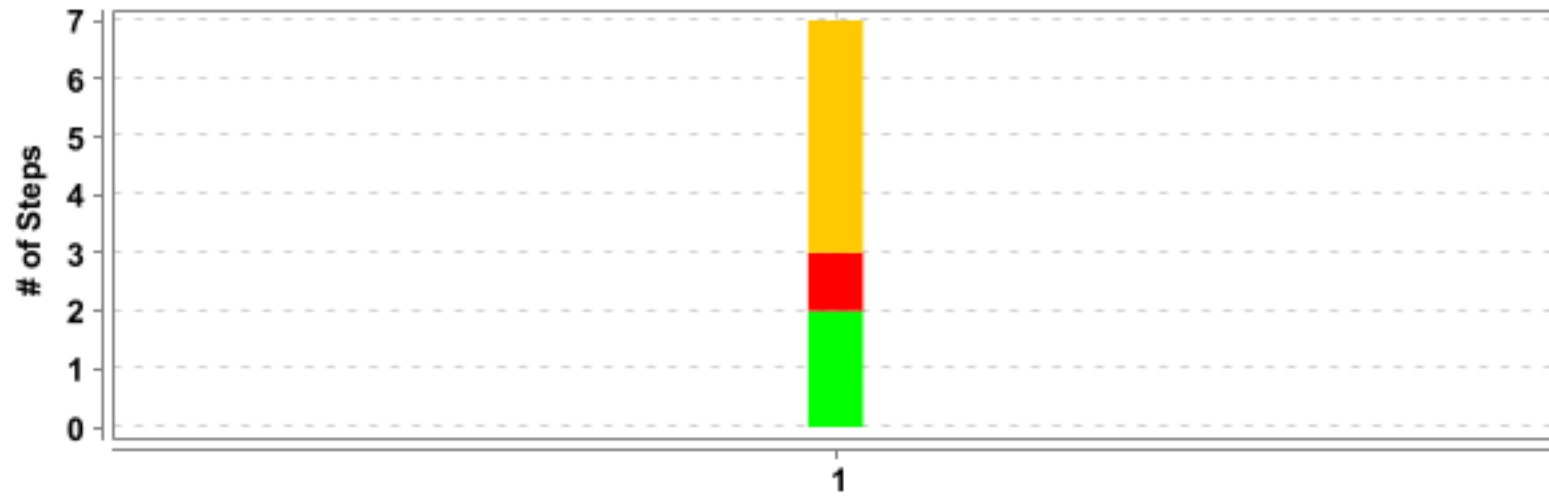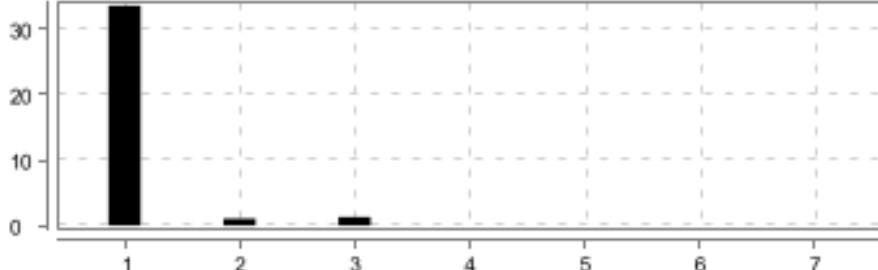
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the Functionality of Inventory	Create denomination details	7	2	1	4	48.710 s

(F)- Check the Functionality of Inventory

FAILED	DURATION - 48.715 s	Scenarios		Steps	
/ 12:57:23.104 PM // 12:58:11.819 PM /		Total - 1		Total - 7	
		Pass - 0		Pass - 2	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 4	

(S)- Create denomination details

FAILED	DURATION - 48.710 s		Steps	
/ 12:57:23.109 PM // 12:58:11.819 PM /			Total - 7	
Check the Functionality of Inventory			Pass - 2	
@KUBS_INV_MGMT_UAT_002_002_01			Fail - 1	
			Skip - 4	

#	Step / Hook Details	Status	Duration
1	Given User should go to the kubs url and login as a maker user	PASSED	33.583 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.969 s
	screenshot		
2	And user should navigate to denomination master menu	PASSED	1.039 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.316 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	When click on eye button of denomination master	FAILED	1.313 s

	org.openqa.selenium.ElementClickInterceptedException: element click intercepted: Element <ion-button routerlinkactive="active" color="medium" class="menuicons ion-color ion-color-medium md button button-small button-clear ion-activatable ion-focusable hydrated" ng-reflect-color="medium" tabindex="0" ng-reflect-router-link-active="active" ng-reflect-router-direction="root" ng-reflect-router-link="/tabs/list/datagrid-view/179" ng-reflect-query-params="[object Object]">...</ion-button> is not clickable at point (233, 551). Other element would receive the click: <ion-item _ngcontent-juq-c280="" lines="none" style="height: 56px;" ng-reflect-lines="none" class="item md item-lines-none hydrated item-label">...</ion-item> (Session info: chrome=108.0.5359.125) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'DESKTOP-PSK9T3U', ip: '10.200.4.146', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [0a36e2126eacec28a5096263217f0e5f, clickElement {id=34c405c8-0cab-41a2-8352-298dd509ac72}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 108.0.5359.125, chrome: {chromedriverVersion: 108.0.5359.22 (ec46c90f5938..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:50913}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:50913/devtoo..., se:cdpVersion: 108.0.5359.125, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Element: [[ChromeDriver: chrome on WINDOWS (0a36e2126eacec28a5096263217f0e5f)] -> xpath: //div[7]//ion-menu-toggle[2]//ion-item//ion-buttons//ion-button[2]] Session ID: 0a36e2126eacec28a5096263217f0e5f
	
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	    at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:251)
	    at org.openqa.selenium.remote.RemoteWebElement.click(RemoteWebElement.java:77)
	    at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)
	    at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)
	    at java.base/java.lang.reflect.Method.invoke(Method.java:568)
	    at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:52)
	    at jdk.proxy2/jdk.proxy2.$Proxy46.click(Unknown Source)
	    at stepdefinitions.INVENTORY_MAINTENANCE_DenominationMaster.click_on_eye_button_of_denomination_master(INVENTORY_MAINTENANCE_DenominationMaster.java:64)
	    at ?.click on eye button of denomination master(file:///C:/Users/ININDC00089/git/AzentioAutomationFramework/ArAp/AzentioAutomationFramework_ARAP_Excel/src/test/java/features/InventoryManageMent_Testing.feature:7)
	* Not displayable characters are replaced by '?'.		

	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.488 s

#	Step / Hook Details	Status	Duration
	screenshot		
4	And click on add button to create denomination details	SKIPPED	0.001 s
5	And user update the data set ID for denomination	SKIPPED	0.001 s
6	And Fill the required fields to create denomination details	SKIPPED	0.000 s
7	Then Save and submit the creation denomination details	SKIPPED	0.001 s

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)
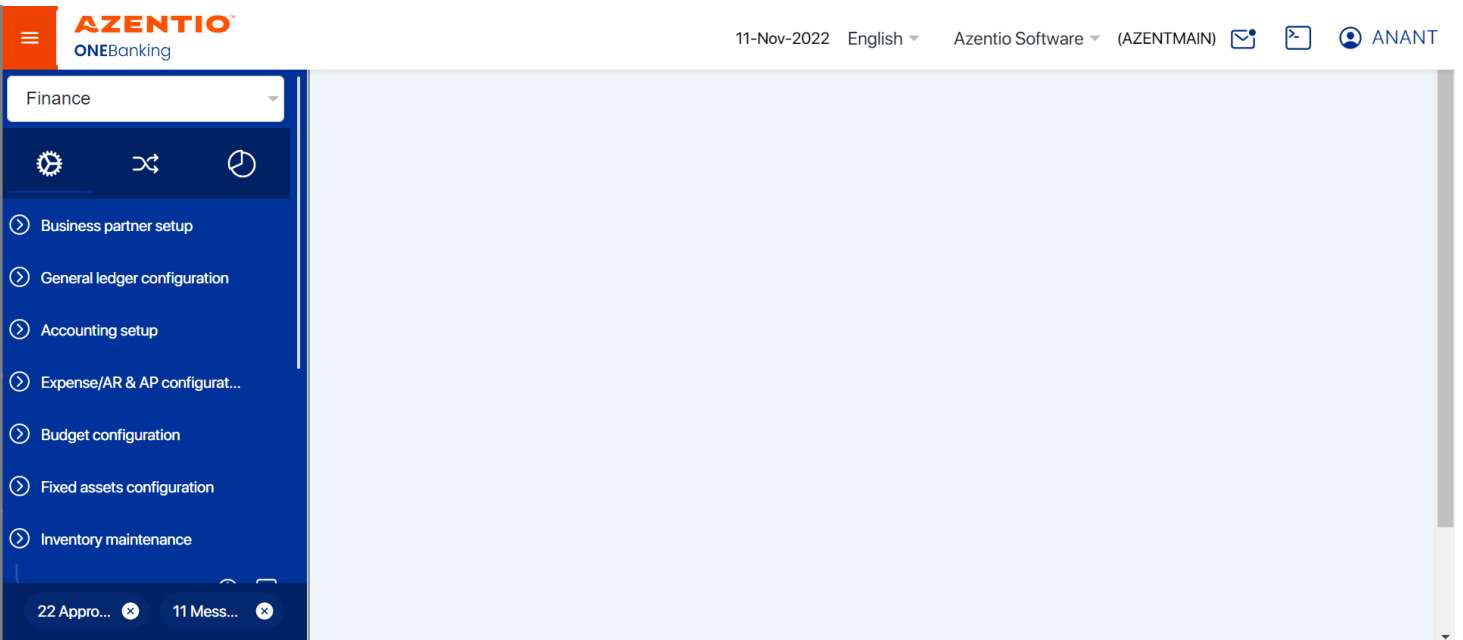

(S) Create denomination details

(F) Check the Functionality of Inventory

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Create denomination details

(F) Check the Functionality of Inventory

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Create denomination details

(F) Check the Functionality of Inventory

AZENTIO
ONEBanking

11-Nov-2022   English   Azentio Software   (AZENTMAIN)   ANANT

Finance

- Business partner setup
- General ledger configuration
- Accounting setup
- Expense/AR & AP configurat...
- Budget configuration
- Fixed assets configuration
- Inventory maintenance

22 Appro...   11 Mess...