


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	To test the property details tab	1	0	1	0	1 m 19.651 s

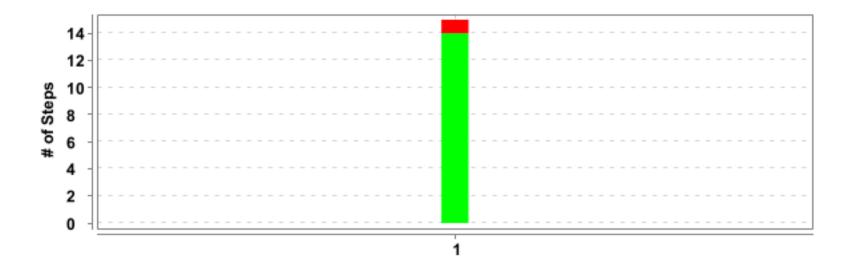

#	Feature Name	Scenario Name	T	P	F	S	Duration
1	To test the property details tab	verify while modification, when user keep any mandatory	15	14	1	0	1 m 19.642 s
		field blank and click on save button					

DETAILED SECTION -- 4 --

(F)- To test the property details tab

FAILED	DURATION - 1 m 19.651 s	Scenarios		Steps	
		Total - 1		Total - 15	
/ 11:29:38.307 a	am // 11:30:57.958 am /	Pass - 0	1	Pass - 14	15
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	

(S)- verify while modification, when user keep any mandatory field blank and click on save button

FAILED DURATION - 1 m 19.642 s								- 1					-			Steps		
/ 11:29:38.316 am // 11:30:57.958 am /	20	+			 	 -	- +	-					-			Total - 15		
	10	1			 - 4	 								_		Pass - 14	15	
To test the property details tab						1								ı		Fail - 1		J
@AT_PD_005	0	-1	-	<u> </u>	 +	 	7		-	10	+	12	13	14	15	Skip - 0		

#	Step / Hook Details	Status	Duration
1	Given User Launch the KULS url for Transaction	PASSED	27.770 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.705 s
	screenshot		
	CONTRACTOR STATE OF THE PROPERTY OF THE PROPER		
2	And user click on Inbox Icon	PASSED	0.959 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.580 s
	screenshot		
	ACENTO Sense of P No		


AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) And user search Appdata Entry Arter_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	#	Step / Hook Details	Status	Duration
And user search Appdata Entry And user search Appdata Entry AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Sce	3	And user click search icon	PASSED	0.322 s
And user search Appdata Entry AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) 5 And user click on First record of Appdata Entry AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) 5 And user click on First record of Appdata Entry AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) Screenshot AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) PASSED 3.211 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) Screenshot After_Step - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) PASSED 0.846 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.424 s
And user search Appdata Entry AFIER_STEP - stepdefinitions. HooksClass.addScreenshot(jo.cucumber.java.Scenario) Screenshot ATER_STEP - stepdefinitions. HooksClass.addScreenshot(jo.cucumber.java.Scenario) And user click on First record of Appdata Entry AFIER_STEP - stepdefinitions. HooksClass. addScreenshot(jo.cucumber.java.Scenario) AFIER_STEP - stepdefinitions. HooksClass. addScree		screenshot		
AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) screenshot And user click on First record of Appdata Entry AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) screenshot And user choose Property Details Tab AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) Screenshot AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) AFTER_STEP - stepdefinitions. HooksClass. addScreensh		The content of the		
screenshot And user click on First record of Appdata Entry AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) passed AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) passed AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) passed 1.459 s	4	And user search Appdata Entry	PASSED	0.156 s
And user click on First record of Appdata Entry AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 3.211 s PASSED 0.846 s 7 And user click First Record Edit Icon PASSED 1.459 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.257 s
Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Screenshot Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Screenshot Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step - step definitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Arter_step - step - step - step - step - step - step - st		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot And user choose Property Details Tab AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 7 And user click First Record Edit Icon PASSED 0.344 s 0.344 s 0.344 s				
screenshot And user choose Property Details Tab AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot And user click First Record Edit Icon PASSED 1.459 s	5	And user click on First record of Appdata Entry	PASSED	5.159 s
And user choose Property Details Tab AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot And user click First Record Edit Icon PASSED 3.211 s 0.846 s PASSED 7. And user click First Record Edit Icon		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.344 s
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot And user click First Record Edit Icon PASSED 3.211 s 3.211 s 0.846 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot And user click First Record Edit Icon PASSED 0.846 s PASSED 1.459 s		*** Company of the co		
Screenshot And user click First Record Edit Icon PASSED 1.459 s	6	And user choose Property Details Tab	PASSED	3.211 s
7 And user click First Record Edit Icon PASSED 1.459 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.846 s
7 And user click First Record Edit Icon PASSED 1.459 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.816 s	7	And user click First Record Edit Icon	PASSED	1.459 s
		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.816 s
screenshot		screenshot		

#	Step / Hook Details	Status	Duration
	ASSETTION AND RESTRICT TO THE PROPERTY OF THE		
8	And user update the Excelsheet Testdata for blank field	PASSED	0.224 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.646 s
	screenshot		
	ASSETTE		
9	And user can able to select the data from the security dropdown	PASSED	0.734 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.418 s
	screenshot		
	AZENTO *** AND BETT OF THE PROPERTY OF THE PR		
10	And user can able to select the data from the property city field	PASSED	0.850 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.502 s
	screenshot		
	ASENTO		
11	And user can able to select the data from the Property Type field	PASSED	0.540 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.398 s
	screenshot]	


#	Step / Hook Details	Status	Duration
	AZENTO SANTE SE PORTO DE DE SE PORTO DE SE PORTO DE DE SE PORTO DE DE SE PORTO DE DESCRIPCION DE SE PORTO DE DESCRIPCION DE SE PORTO DE SE PORT		
12	And user can able to select the data from the APF Status field	PASSED	0.438 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.376 s
	screenshot		
	A SECUTIO		
13	And user Blank fill the Mandatory field	PASSED	1.061 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.178 s
	screenshot		
	A AZENTO **** A STATE **** **** \$\frac{1}{2} \text{ \$\frac{1} \text{ \$\frac{1}{2} \text{ \$\frac{1}{2} \text{ \$\frac{1}{2		
14	And save the property details record	PASSED	10.204 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.292 s
	screenshot		
	A SECTION *** OF THE PROPERTY		
15	Then user verify the blank field and get the proper validation message	FAILED	0.089 s
	org.openqa.selenium.JavascriptException: javascript error: Cannot read properties of undefined (reading 'innerText') (Session info: chrome=107.0.5304.121) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014547', ip: '10.1.47.111', os. name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [aab32661262fc5ddd26f290872c2336d, executeScript {script=return document.getElementsByTagName('ion-badge')[1].innerText, args=[]} Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 107.0.5304.121, chrome: {chromedriverVersion: 107.0.5304.62 (1eec40d3a576, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:64239}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy:		

DETAILED SECTION -- 8 --


#	Step / Hook Details	Status	Duration
	Proxy(), se:cdp: ws://localhost:64239/devtoo, se:cdpVersion: 107.0.5304.121, setWindowRect: true, strictFileInteractability: false, timeouts: [implicit: 0, pageLoad: 300000, script: 30000], unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true) Session ID: aab32661262fc5ddd26f290872c2336d at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:481) at helper.JavascriptHelper.executeScript(JavascriptHelper.executeScript(JavascriptHelper.java:21) at stepdefinitions.Property_Details.user_verify_the_blank_field_and_get_the_proper_validation_message(Property_Details.java:202) at ?.user verify the blank field and get the proper validation message(file:///C./Users/inindc00075/git/Arshath_ULS/Arshath_AzentioULSFramework/src/test/java/features/ULS_Property_Details.feature:286)		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.273 s
	screenshot	_	

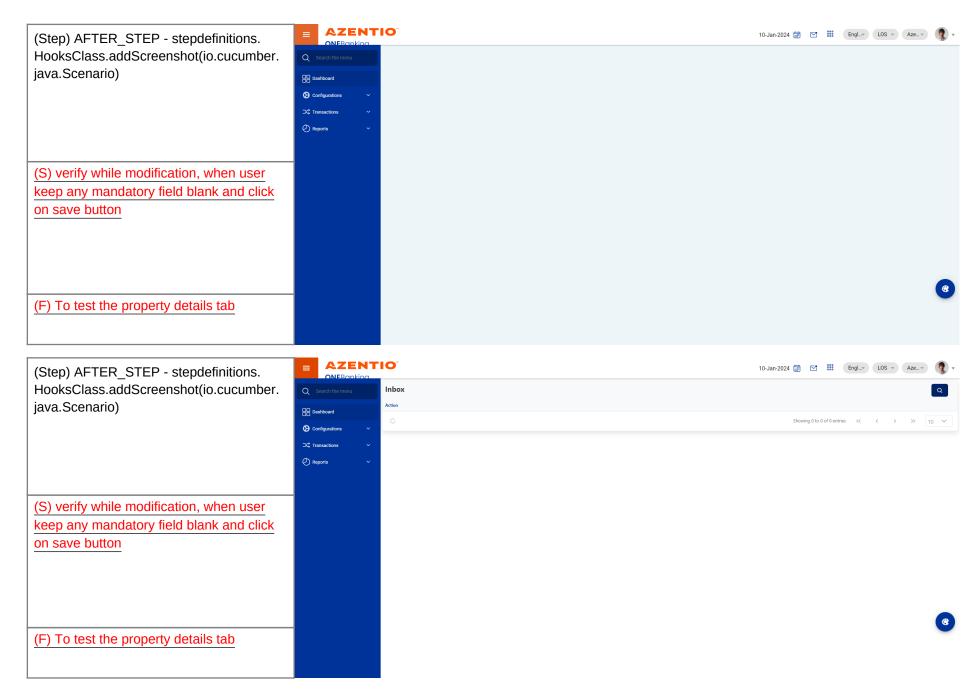


EXPANDED SECTION -- 10 --

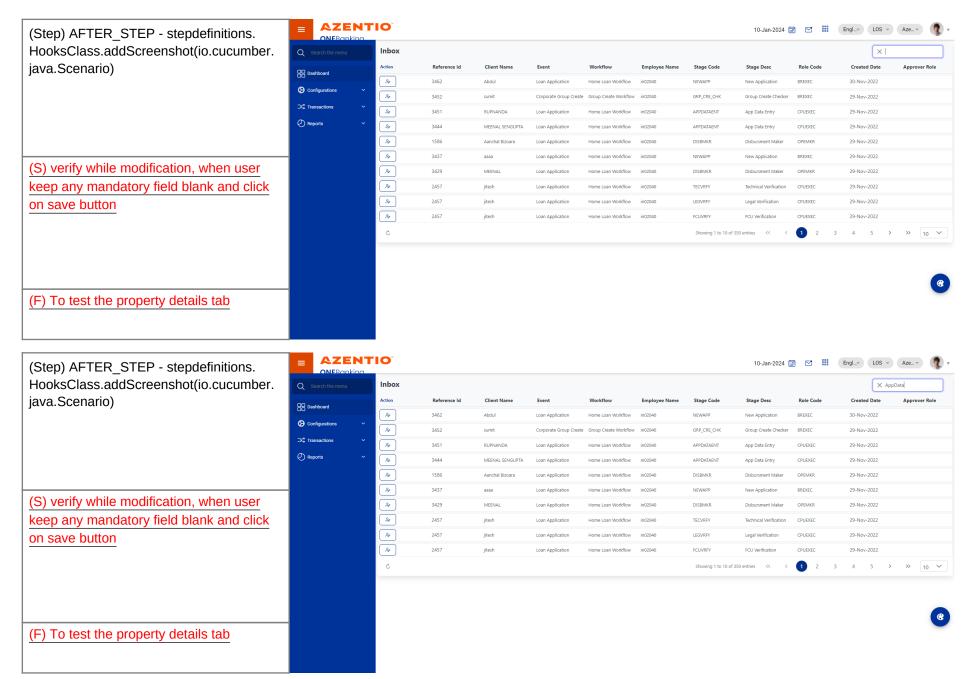


-- 11 --

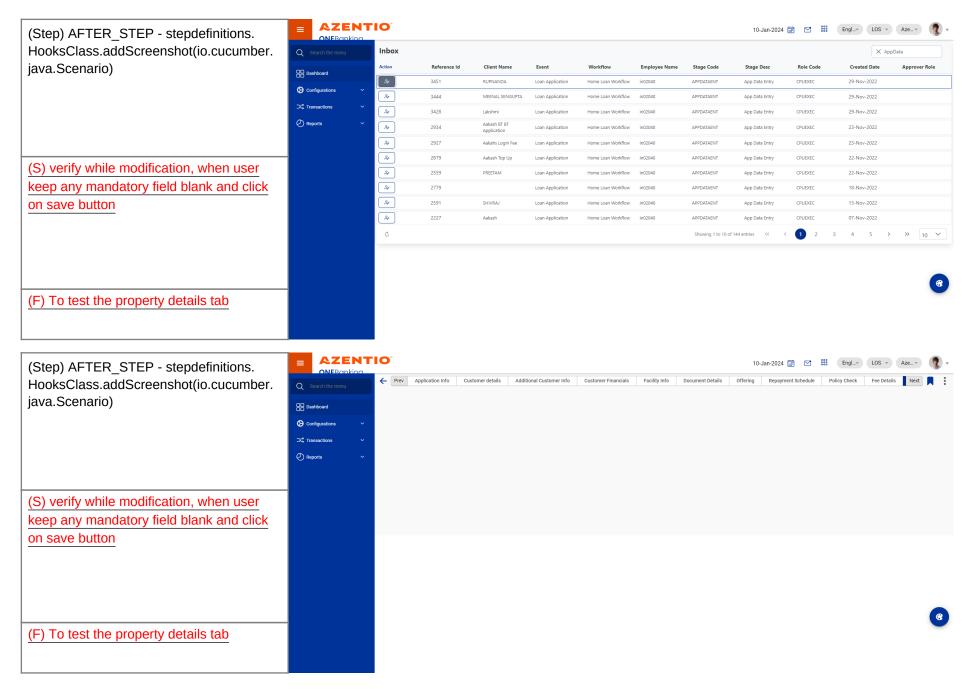


EXPANDED SECTION -- 12 --

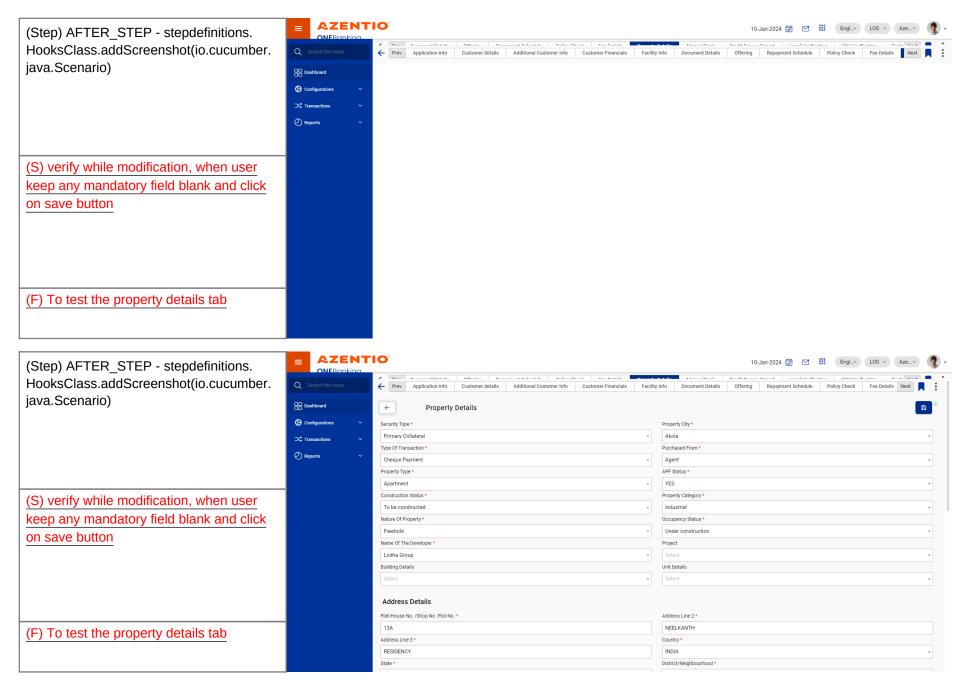


EXPANDED SECTION -- 13 --

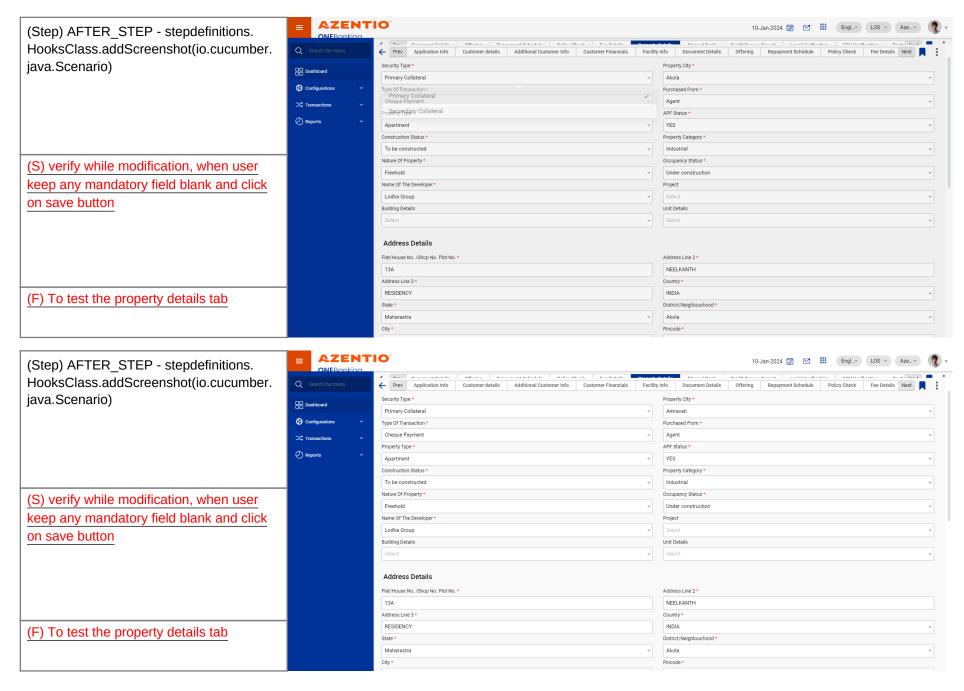

EXPANDED SECTION -- 14 --

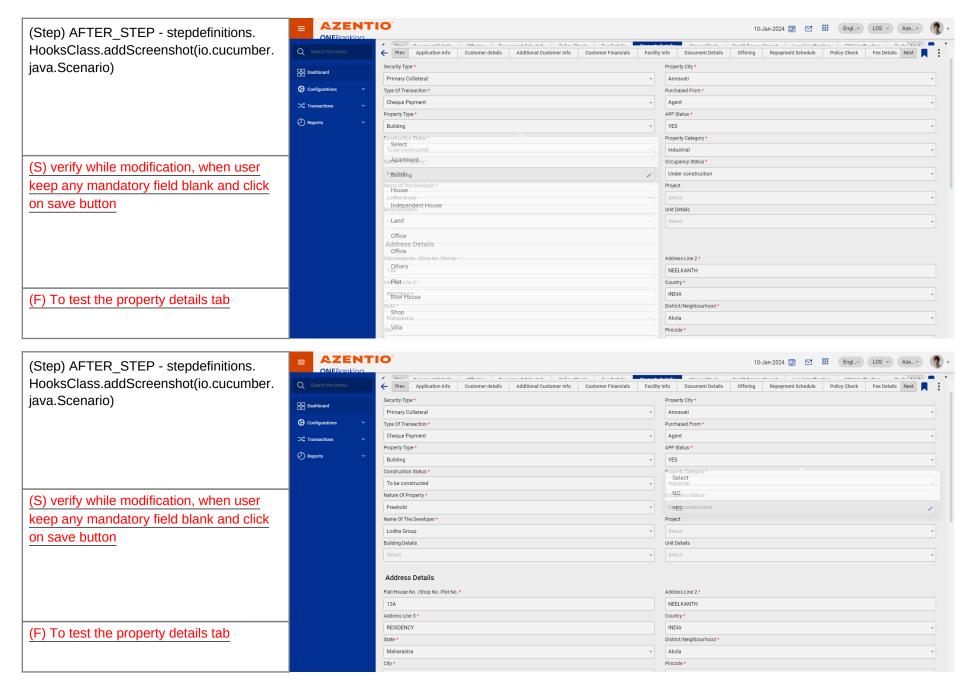

EXPANDED SECTION -- 15 --

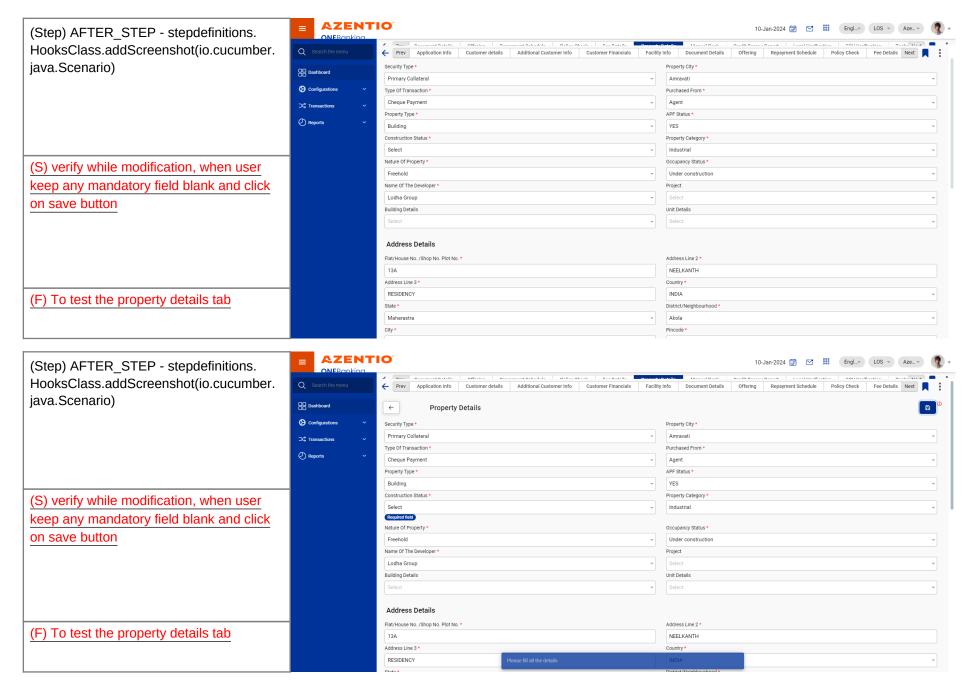

EXPANDED SECTION -- 16 --

