

Cucumber Report

Jul 27, 2022, 8:02:27 PM

Start : Jul 27, 8:01:56.926 PM

End : Jul 27, 8:02:24.262 PM

Duration : 27.336 s

Features

Scenarios

Steps

PASSED - 0

FAILED - 1

SKIPPED - 0

PASSED - 0

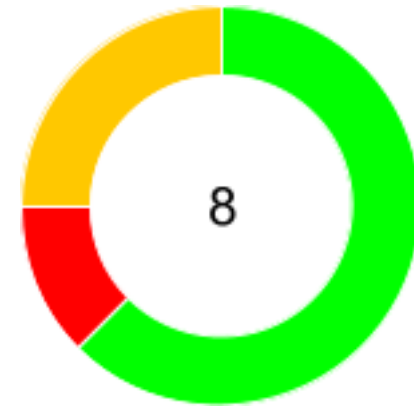
FAILED - 1

SKIPPED - 0

PASSED - 5

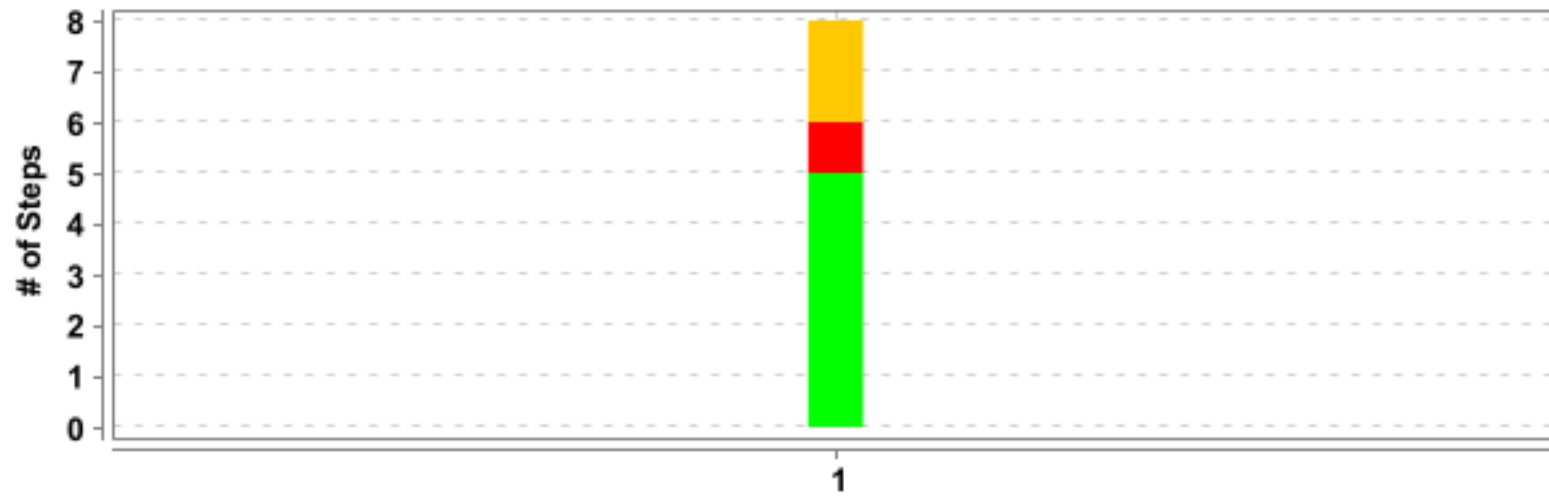
FAILED - 1

SKIPPED - 2







#	Feature Name	T	P	F	S	Duration
1	<u>Check the functionality of product master</u>	1	0	1	0	27.336 s

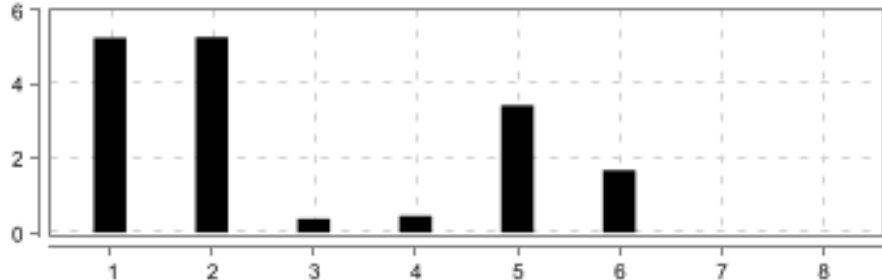



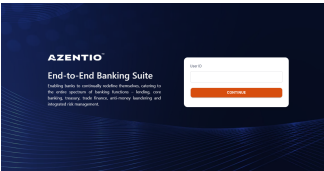
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Check the functionality of product master</u>	<u>Product Master - to check the functionality of status(active/deactive) and back button</u>	8	5	1	2	27.327 s

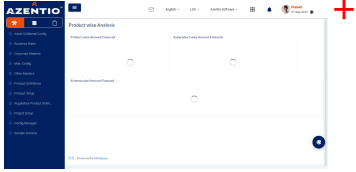
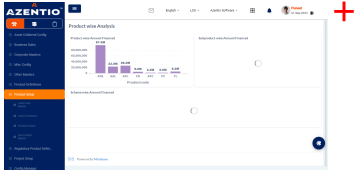
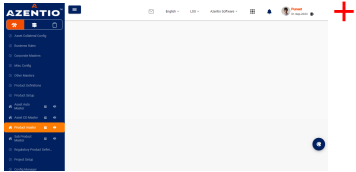
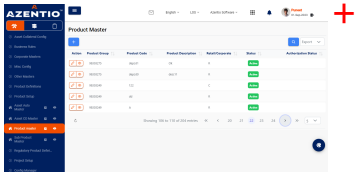
(F)- Check the functionality of product master

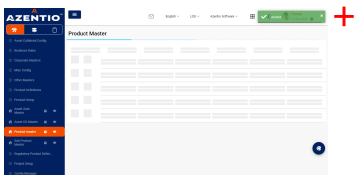
FAILED	DURATION - 27.336 s	Scenarios		Steps	
/ 8:01:56.926 PM // 8:02:24.262 PM /		Total - 1		Total - 8	
		Pass - 0		Pass - 5	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 2	

(S)- Product Master - to check the functionality of status(active/deactive) and back button

<div>FAILED</div> <div>DURATION - 27.327 s</div>		<div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 5</div> <div>Fail - 1</div> <div>Skip - 2</div>	<div></div>
<div>/ 8:01:56.935 PM // 8:02:24.262 PM /</div>				
<div>Check the functionality of product master</div>				
<div>@ProductMaster @M9</div>				

#	Step / Hook Details	Status	Duration
1	Given User launch the kuls application	PASSED	5.253 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	1.183 s
	screenshot		
			
2	And User Login as maker	PASSED	5.269 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.168 s
	screenshot		

#	Step / Hook Details	Status	Duration
			
3	Then user should navigate to product master	PASSED	0.370 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.331 s
	screenshot		
			
4	And click on edit view of product master	PASSED	0.447 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.533 s
	screenshot		
			
5	Then verify the functionality of status of the record	PASSED	3.435 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.771 s
	screenshot		
			
6	Then verify user can able to change the status from active to deactivate	FAILED	1.679 s
	<p>org.openqa.selenium.StaleElementReferenceException: stale element reference: element is not attached to the page document (Session info: chrome=100.0.4896.127) For documentation on this error, please visit: https://selenium.dev/exceptions/#stale_element_reference Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [09c7803a8cdd0f0d76393b71f55e6774, getElementText {id=76abdeb9-a555-45cc-a22d-fa3b9c405034}] Capabilities {acceptInsecureCerts:</p>		

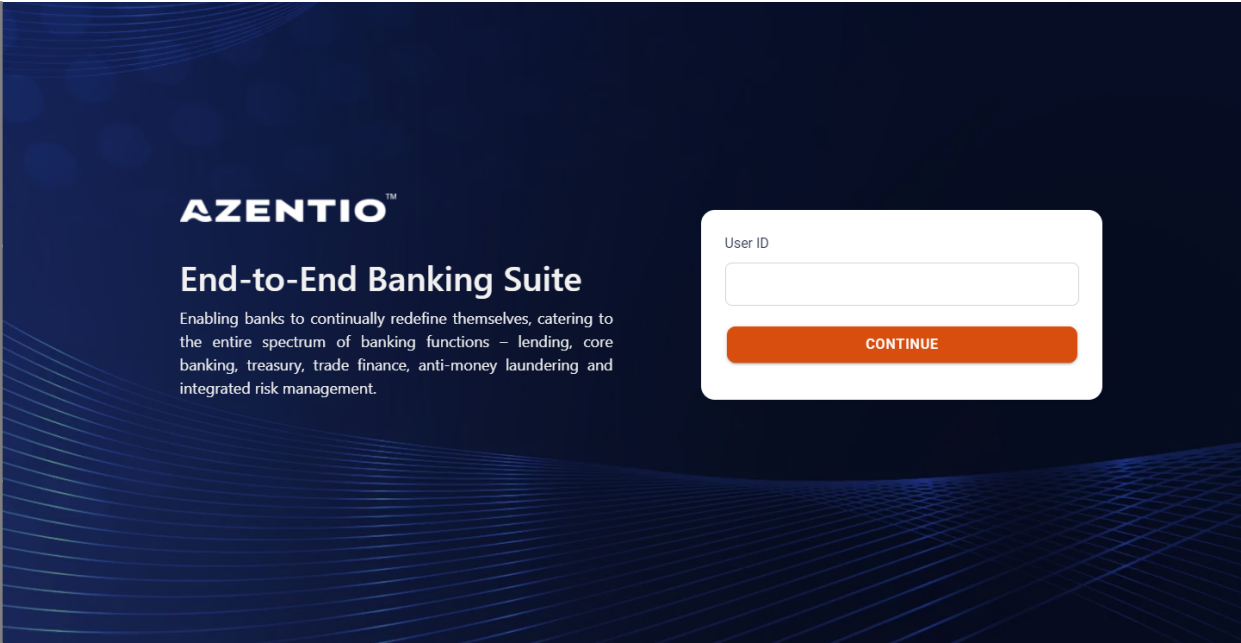
#	Step / Hook Details	Status	Duration
	<p>false, browserName: chrome, browserVersion: 100.0.4896.127, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\ININDC~1\AppData\Local\..., goog:chromeOptions: {debuggerAddress: localhost:64518}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:64518/devtools, se:cdpVersion: 100.0.4896.127, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Element: [[ChromeDriver: chrome on WINDOWS (09c7803a8cdd0f0d76393b71f55e6774)] -> xpath: //span[contains(text(),'depo30')]]/..../td[6]/p-celleditor/p-tag/span] Session ID: 09c7803a8cdd0f0d76393b71f55e6774</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:251) at org.openqa.selenium.remote.RemoteWebElement.getText(RemoteWebElement.java:201) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:52) at jdk.proxy2/jdk.proxy2.\$Proxy45.getText(Unknown Source) at stepdefinitions.ProductMaster_Retail.verify_user_can_able_to_change_the_status_from_active_to_deactive(ProductMaster_Retail.java:486) at ?.verify user can able to change the status from active to deactive(file:///C:/Users/inindc00091/git/Devesh_AzentioULS_FW/AzentioULSFrameworkCopy/src/test/java/features/ProductMaster_Retail.feature:95) * Not displayable characters are replaced by '?'. </p>		
	<p>AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)</p> <p>screenshot</p> 	PASSED	0.434 s
7	Then verify user can able to change the status from deactive to active	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
8	Then verify the functionality of back button of product master	SKIPPED	0.000 s

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Product Master - to check the
functionality of status(active/deactive) and
back button

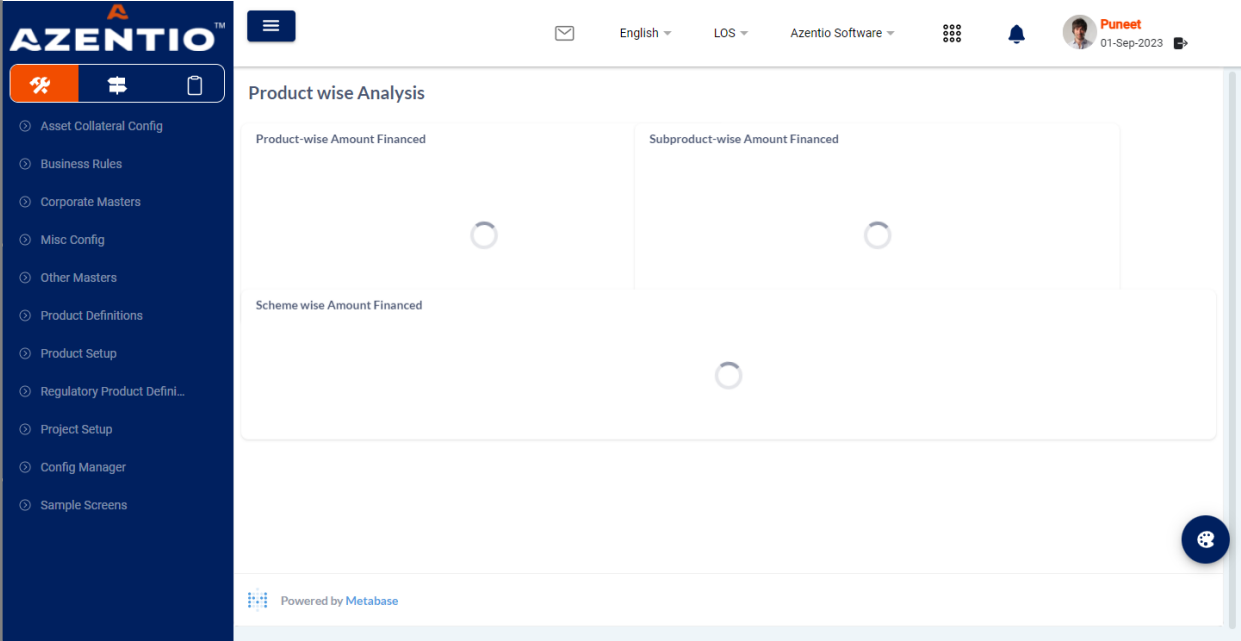
(F) Check the functionality of product
master



(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Product Master - to check the
functionality of status(active/deactive) and
back button

(F) Check the functionality of product
master



(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Product Master - to check the
functionality of status(active/deactive) and
back button

(F) Check the functionality of product
master

The screenshot displays the Azentio Software dashboard. The left sidebar contains a menu with the following items: Asset Collateral Config, Business Rules, Corporate Masters, Misc Config, Other Masters, Product Definitions, Product Setup (highlighted in orange), Asset Auto Master, Asset CD Master, Product master, Sub Product Master, Regulatory Product Defini..., Project Setup, and Config Manager. The main content area is titled 'Product wise Analysis' and features three charts: 'Product-wise Amount Financed' (a bar chart showing values for AHL, AAL, APL, CD, AFC, CC, and TL), 'Subproduct-wise Amount Financed' (a placeholder for a chart), and 'Scheme wise Amount Financed' (a placeholder for a chart). The top right of the dashboard shows the user profile 'Puneet' with the date '01-Sep-2023'. The bottom right corner has a circular icon with a gear symbol. The text 'Powered by Metabase' is visible at the bottom left of the main content area.

Productcode	Amount Financed
AHL	97.0M
AAL	23.0M
APL	26.0M
CD	5.0M
AFC	2.0M
CC	2.0M
TL	6.0M

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Product Master - to check the
functionality of status(active/deactive) and
back button

(F) Check the functionality of product
master

The screenshot displays the Azentio Software dashboard with the 'Product master' section selected in the sidebar. The sidebar menu is identical to the previous screenshot, with 'Product master' highlighted in orange. The main content area is currently blank, showing only the top navigation bar with the user profile 'Puneet' and the date '01-Sep-2023'. The bottom right corner features a circular icon with a gear symbol.

(F) Check the functionality of product master

- Asset Collateral Config
- Business Rules
- Corporate Masters
- Misc Config
- Other Masters
- Product Definitions
- Product Setup
- Asset Auto Master
- Asset CD Master
- Product master**
- Sub Product Master
- Regulatory Product Defini...
- Project Setup
- Config Manager

English

LOS

Azentio Software

Puneet
01-Sep-2023

Product Master

+

Q

Export

Action	Product Group	Product Code	Product Description	Retail/Corporate	Status	Authorization Status
	98303275	depo31	Ok	R	Active	
	98303275	depo30	desc11	R	Active	
	98303249	122		C	Active	
	98303249	dd		R	Active	
	98303249	A		R	Active	

Showing 106 to 110 of 204 entries

<<

<

20

21

22

23

24

>

>>

5

▼

(F) Check the functionality of product master

The screenshot displays the AZENTIO software interface. On the left is a dark blue sidebar containing a menu with items such as "Asset Collateral Config", "Business Rules", "Corporate Masters", "Misc Config", "Other Masters", "Product Definitions", "Product Setup", "Asset Auto Master", "Asset CD Master", "Product master" (highlighted), "Sub Product Master", "Regulatory Product Defini...", "Project Setup", and "Config Manager". The main area has a top header bar with navigation icons, language selection ("English"), user information ("Puneet", "01-Sep-2023"), and system status ("Success"). Below the header, the title "Product Master" is followed by a large grid of grey rectangular placeholders representing data rows.