Cucumber Report

Start : Jul 25, 11:27:10.991 PM	End : Jul 25, 11:27:32.771 PM	Duration : 21.780 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 8 FAILED - 1 SKIPPED - 13
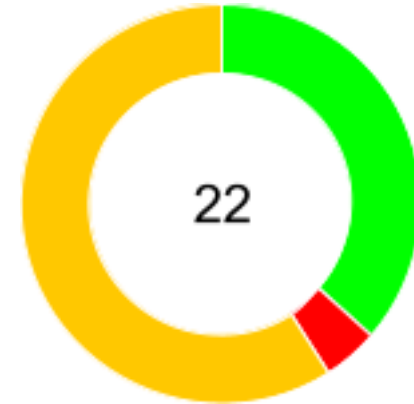
#	Feature Name	T	P	F	S	Duration
1	Product Master Retail Functionality	1	0	1	0	21.780 s
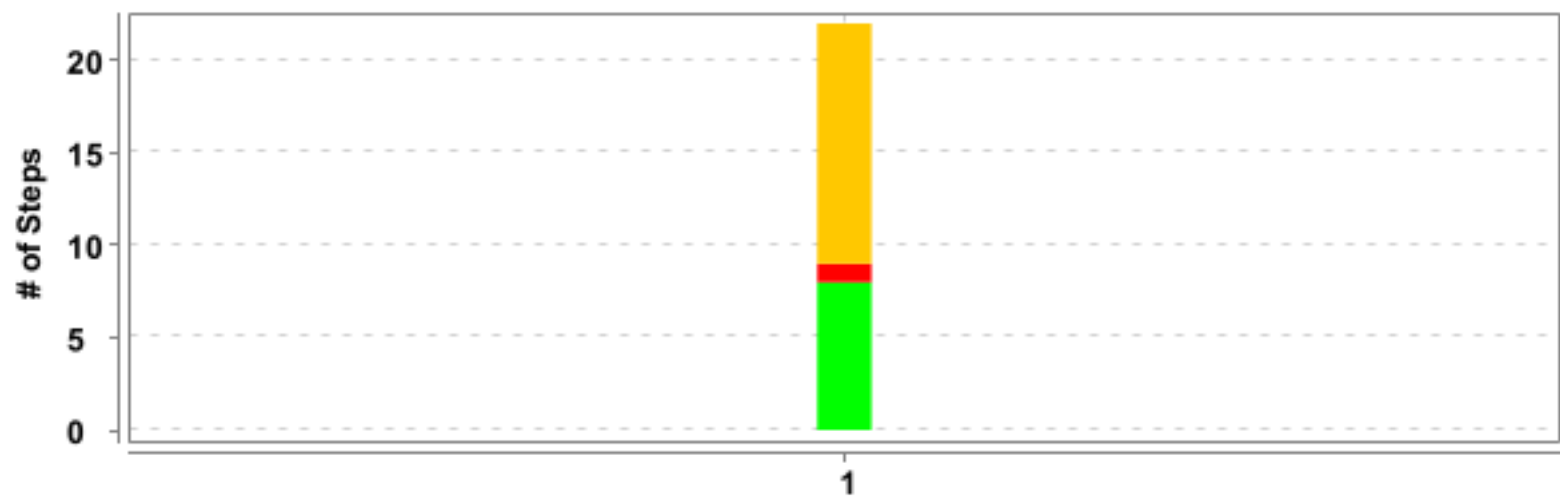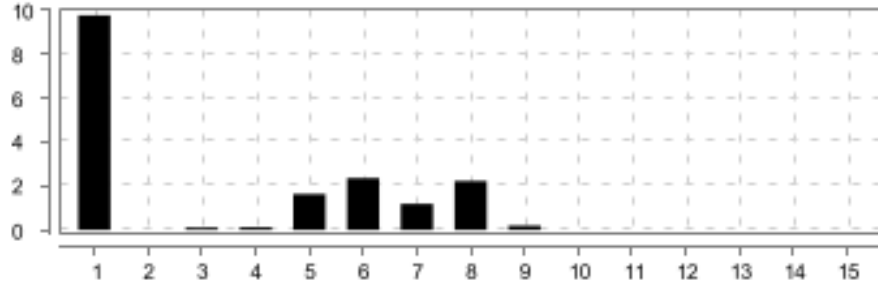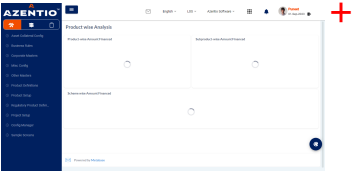
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Product Master Retail Functionality	System should not allow user to save the records with invalid data	22	8	1	13	21.776 s

(F)- Product Master Retail Functionality

FAILED	DURATION - 21.780 s		Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0	1	Steps Total - 22 Pass - 8 Fail - 1 Skip - 13	22
/ 11:27:10.991 PM // 11:27:32.771 PM /						
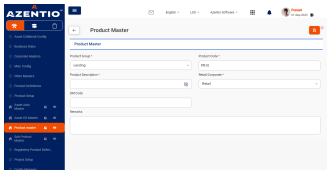
(S)- System should not allow user to save the records with invalid data

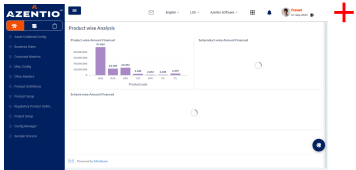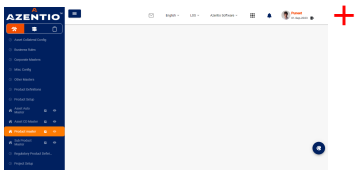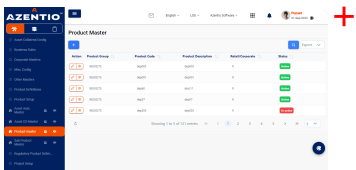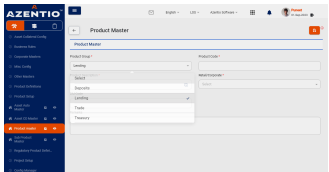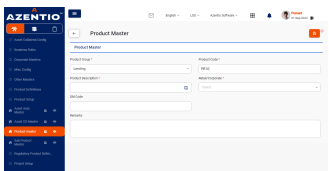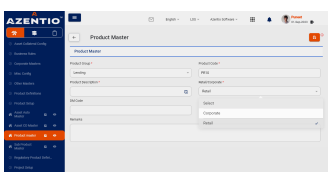| FAILED	DURATION - 21.776 s		Steps Total - 22 Pass - 8 Fail - 1 Skip - 13	22
/ 11:27:10.995 PM // 11:27:32.771 PM /				
Product Master Retail Functionality				
@ProductMaster_Retail_invalid				

#	Step / Hook Details	Status	Duration
1	Given User launch the kuls application	PASSED	9.768 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.153 s
	screenshot		
2	And User Login as maker	PASSED	0.001 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.189 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	Then click on Product Setup	PASSED	0.110 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.149 s
	screenshot 		
4	Then click on Product Master eye icon	PASSED	0.114 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.143 s
	screenshot 		
5	Then click on Product Master add button	PASSED	1.639 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.208 s
	screenshot 		
6	Then verify functionality and asterik mark of the field Product Group	PASSED	2.366 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.126 s
	screenshot		

#	Step / Hook Details	Status	Duration
7	Then verify functionality and asterik mark of the field Product Code	PASSED	1.185 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.098 s
	screenshot		
8	Then verify functionality and asterik mark of the field RetailCorporate	PASSED	2.231 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.124 s
	screenshot		
9	Then verify the field Remarks	FAILED	0.188 s

	org.openqa.selenium.ElementNotInteractableException: element not interactable (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [409fc0949b7a658ab4edb320cdf16cce, sendKeysToElement {id=f0283b7d-e473-464c-a75a-0afe7fcf11f2, value=[Ljava.lang. CharSequence;@19ae36f4}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 98.0.4758.80 (7f0488e8ba0d8..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:51605}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:51605/devtoo..., se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Element: [[ChromeDriver: chrome on WINDOWS (409fc0949b7a658ab4edb320cdf16cce)] -> xpath: //ion-textarea[1]//textarea[1]] Session ID: 409fc0949b7a658ab4edb320cdf16cce
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		

#	Step / Hook Details	Status	Duration
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:251) at org.openqa.selenium.remote.RemoteWebElement.sendKeys(RemoteWebElement.java:107) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:52) at jdk.proxy2/jdk.proxy2.$Proxy45.sendKeys(Unknown Source) at stepdefinitions.ProductMaster_Retail.verify_the_field_remarks(ProductMaster_Retail.java:170) at ?.verify the field Remarks(file:///C:/Users/inindc00089/git/Azentio_ULSFramework/AzentioAutomationFramework/src/test/java/features/ProductMaster_Retail.feature:29) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.152 s
10	Then click on save button	SKIPPED	0.000 s
11	Then validate the impact of any mandatory field blank	SKIPPED	0.000 s
12	Then verify the functionality of Back button	SKIPPED	0.000 s
13	Then click on Product Master add button	SKIPPED	0.000 s
14	Then verify functionality and asterik mark of the field Product Group	SKIPPED	0.000 s
15	Then verify functionality and asterik mark of the field Product Code	SKIPPED	0.000 s
16	Then Enter Product Description	SKIPPED	0.000 s
17	Then verify functionality and asterik mark of the field RetailCorporate	SKIPPED	0.000 s
18	Then verify functionality of the field DM Code	SKIPPED	0.000 s
19	Then verify the field Remarks with special characters value	SKIPPED	0.000 s
20	Then click on save button	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
21	Then validate the impact of special characters value in any field	SKIPPED	0.000 s
22	Then user logout from the application	SKIPPED	0.000 s

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

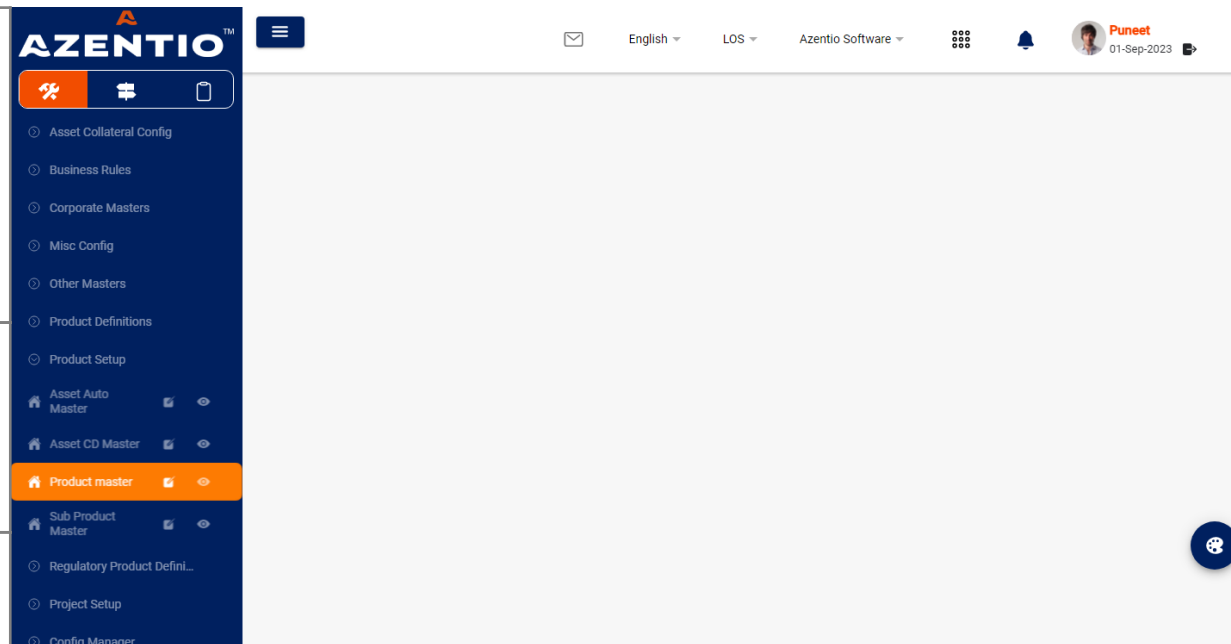(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should not allow user to save
the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should not allow user to save
the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality