

Cucumber Report

Jul 22, 2022, 1:26:59 AM

Start : Jul 22, 1:26:11.350 AM

End : Jul 22, 1:26:58.734 AM

Duration : 47.384 s

Features

Scenarios

Steps

PASSED - 0

FAILED - 1

SKIPPED - 0

PASSED - 0

FAILED - 1

SKIPPED - 0

PASSED - 7

FAILED - 1

SKIPPED - 0







#	Feature Name	T	P	F	S	Duration
1	<u>Check the functionality of product master</u>	1	0	1	0	47.384 s

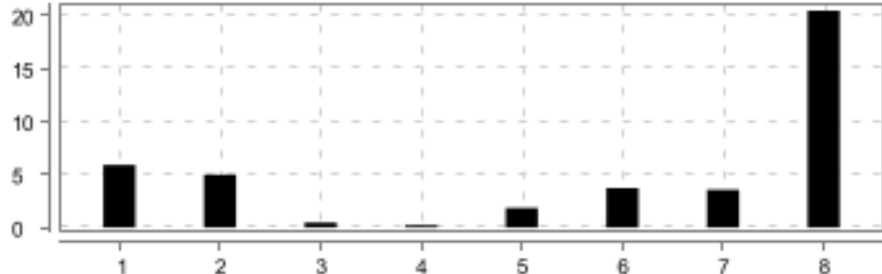



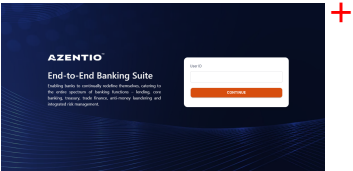
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Check the functionality of product master</u>	<u>Product Master - to check the functionality of status(active/deactive) and back button</u>	8	7	1	0	47.377 s

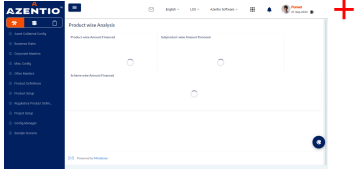
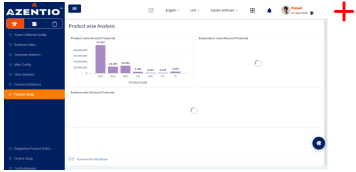
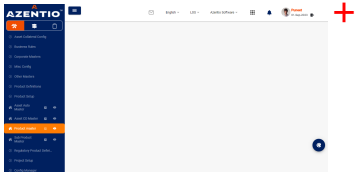
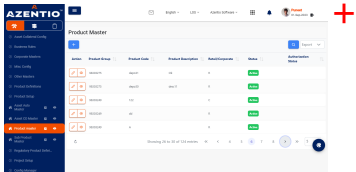
(F)- Check the functionality of product master

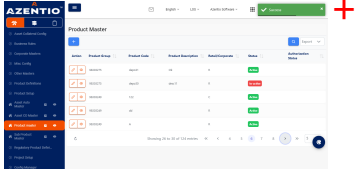
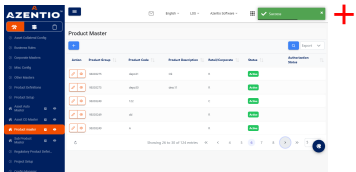
FAILED	DURATION - 47.384 s	Scenarios		Steps	
/ 1:26:11.350 AM // 1:26:58.734 AM /		Total - 1	1	Total - 8	8
		Pass - 0		Pass - 7	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	

(S)- Product Master - to check the functionality of status(active/deactive) and back button

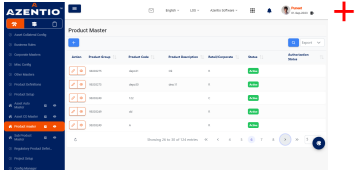
<div>FAILED</div> <div>DURATION - 47.377 s</div>			<div>Steps</div> <div>Total - 8</div> <div>Pass - 7</div> <div>Fail - 1</div> <div>Skip - 0</div>	
/ 1:26:11.356 AM // 1:26:58.733 AM /				
Check the functionality of product master				
@M9				

#	Step / Hook Details	Status	Duration
1	Given User launch the kuls application	PASSED	5.906 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.390 s
	screenshot		
			
2	And User Login as maker	PASSED	4.989 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.137 s
	screenshot		

#	Step / Hook Details	Status	Duration
			
3	Then user should navigate to product master	PASSED	0.469 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.415 s
	screenshot		
			
4	And click on edit view of product master	PASSED	0.220 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.338 s
	screenshot		
			
5	Then verify the functionality of status of the record	PASSED	1.856 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.160 s
	screenshot		
			
6	Then verify user can able to change the status from active to deactivate	PASSED	3.715 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.181 s
	screenshot		

#	Step / Hook Details	Status	Duration
			
7	Then verify user can able to change the status from deactive to active	PASSED	3.583 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.173 s
	screenshot 		
8	Then verify the functionality of back button org.openqa.selenium.TimeoutException: Expected condition failed: waiting for visibility of Proxy element for: DefaultElementLocator 'By.xpath: //button[@ng-reflect-text='Go Back']' (tried for 20 second(s) with 1000 milliseconds interval) at org.openqa.selenium.support.ui.FluentWait.timeoutException(FluentWait.java:263) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:231) at helper.WaitHelper.waitForElementwithFluentwait(WaitHelper.java:93) at stepdefinitions.ProductMaster_Retail.verify_the_functionality_of_back_button(ProductMaster_Retail.java:477) at ?.verify the functionality of back button(file:///C:/Users/inindc00091/git/Azentio_ULS_04/AzentioAutomationFramework/src/test/java/features/ProductMaster_Retail.feature:83) Caused by: org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {\"method\":\"xpath\",\"selector\":\"//button[@ng-reflect-text='Go Back']\"} (Session info: chrome=100.0.4896.127) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [1989c9d466160f9998a5bb0e402c9f2d, findElement {using=xpath, value=//button[@ng-reflect-text='Go Back']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.127, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\\Users\\ININDC~1\\AppData\\L..., goog:chromeOptions: {debuggerAddress: localhost:61932}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:61932/devtoo..., se:cdpVersion: 100.0.4896.127, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 1989c9d466160f9998a5bb0e402c9f2d at jdk.internal.reflect.GeneratedConstructorAccessor18.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)	FAILED	20.468 s

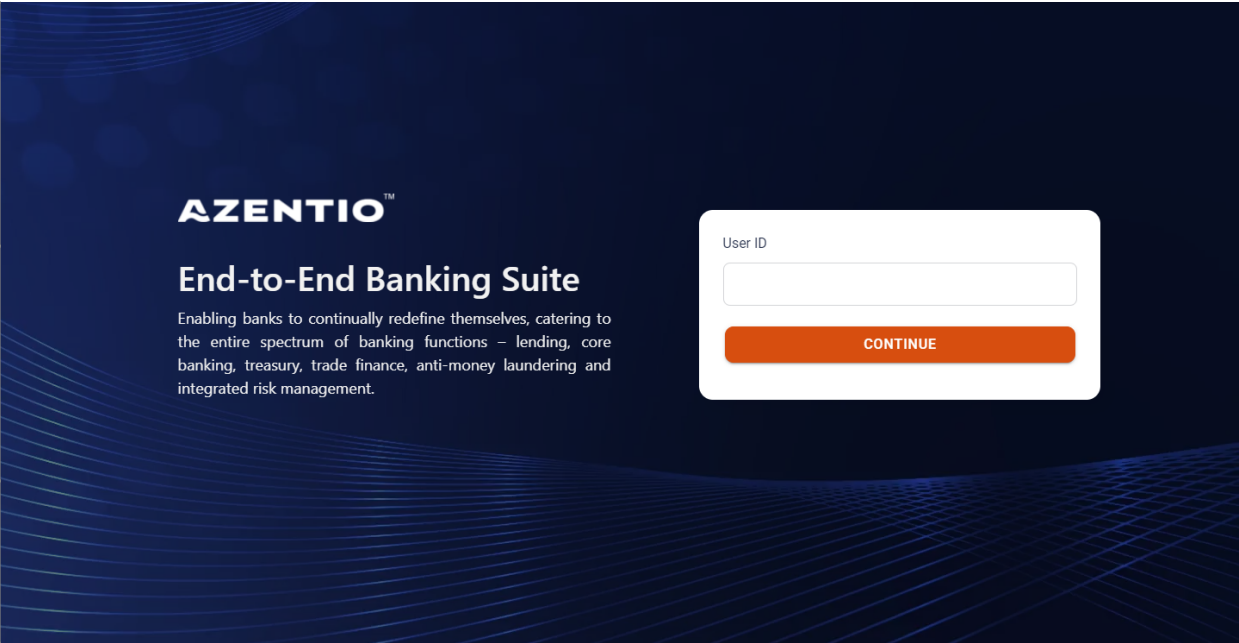
#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy45.isDisplayed(Unknown Source) at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:307) at org.openqa.selenium.support.ui.ExpectedConditions.access\$000(ExpectedConditions.java:40) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:293) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:290) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:208) at helper.WaitHelper.waitForElementwithFluentwait(WaitHelper.java:93) at stepdefinitions.ProductMaster_Retail.verify_the_functionality_of_back_button(ProductMaster_Retail.java:477) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) at io.cucumber.core.runner.TestStep.run(TestStep.java:64) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:104) at io.cucumber.core.runner.Runner.runPickle(Runner.java:71) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$0(TestNGCucumberRunner.java:116) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:117) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:113) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:31) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:133) at org.testng.internal.TestInvoker.invokeMethod(TestInvoker.java:598) at org.testng.internal.TestInvoker.invokeTestMethod(TestInvoker.java:173) at org.testng.internal.MethodRunner.runInSequence(MethodRunner.java:46) at org.testng.internal.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:824) at org.testng.internal.TestInvoker.invokeTestMethods(TestInvoker.java:146) at org.testng.internal.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:146) at org.testng.internal.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:794) at org.testng.TestRunner.run(TestRunner.java:596) at org.testng.SuiteRunner.runTest(SuiteRunner.java:377) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:371) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:332) at org.testng.SuiteRunner.run(SuiteRunner.java:276) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:53) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:96) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1212) at org.testng.TestNG.runSuitesLocally(TestNG.java:1134) at org.testng.TestNG.runSuites(TestNG.java:1063) at org.testng.TestNG.run(TestNG.java:1031) at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115) at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251) at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77) </pre> <p>* Not displayable characters are replaced by '?'. </p>		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.127 s
	<p>screenshot</p> 		

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Product Master - to check the
functionality of status(active/deactive) and
back button

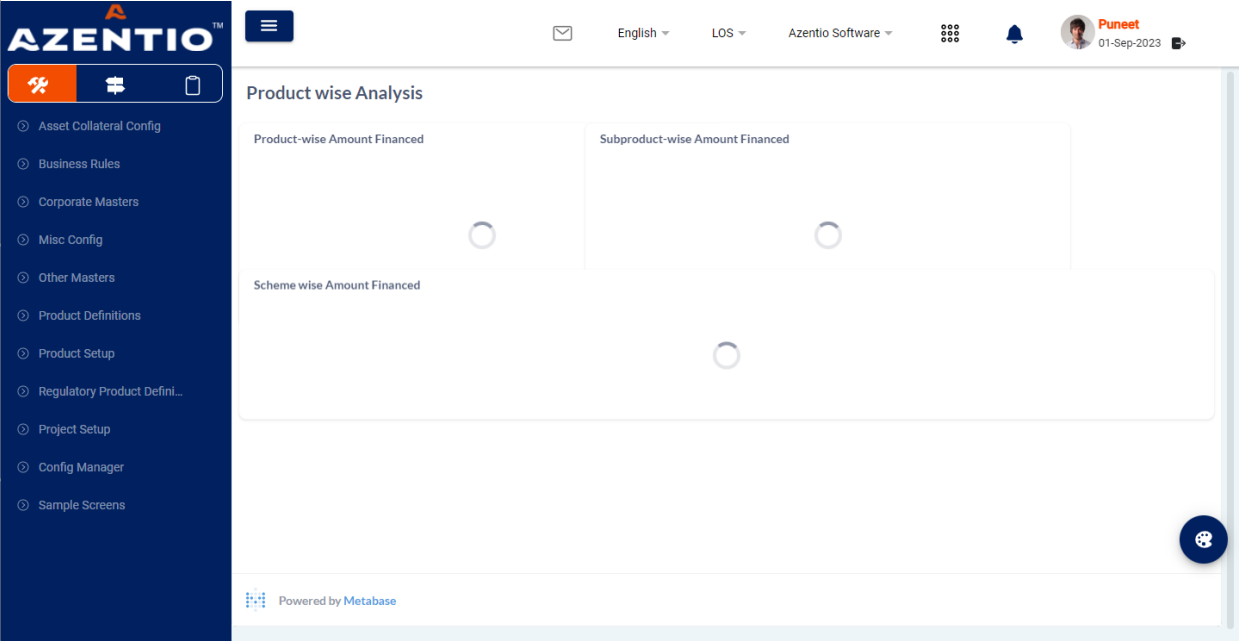
(F) Check the functionality of product
master



(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Product Master - to check the
functionality of status(active/deactive) and
back button

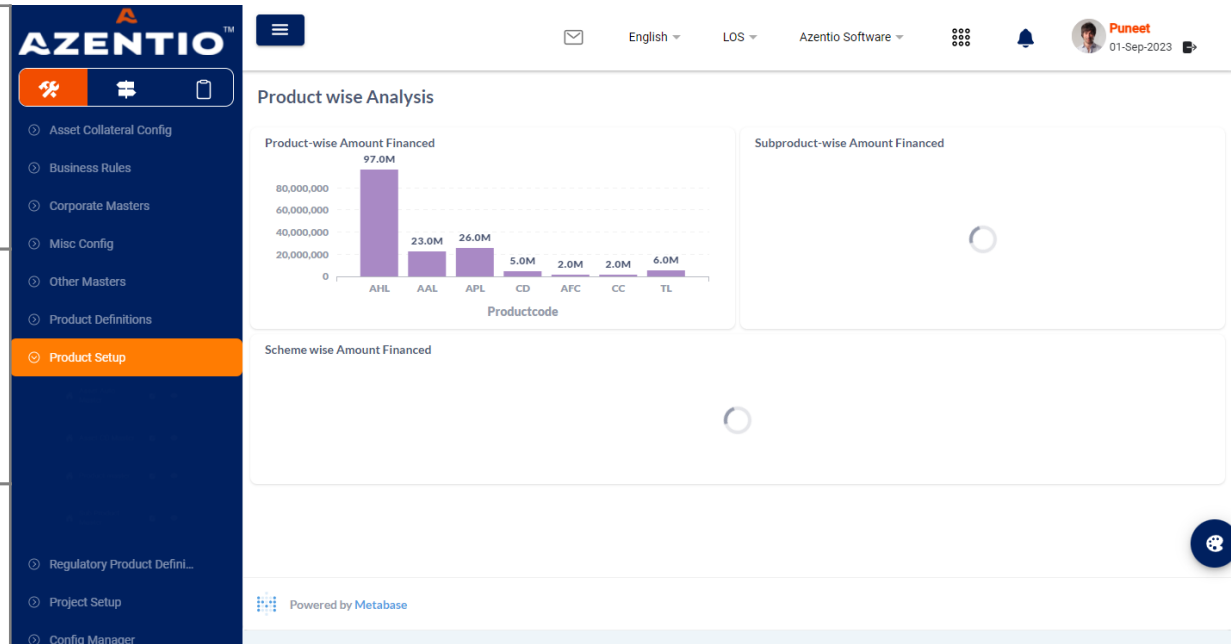
(F) Check the functionality of product
master



(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Product Master - to check the
functionality of status(active/deactive) and
back button

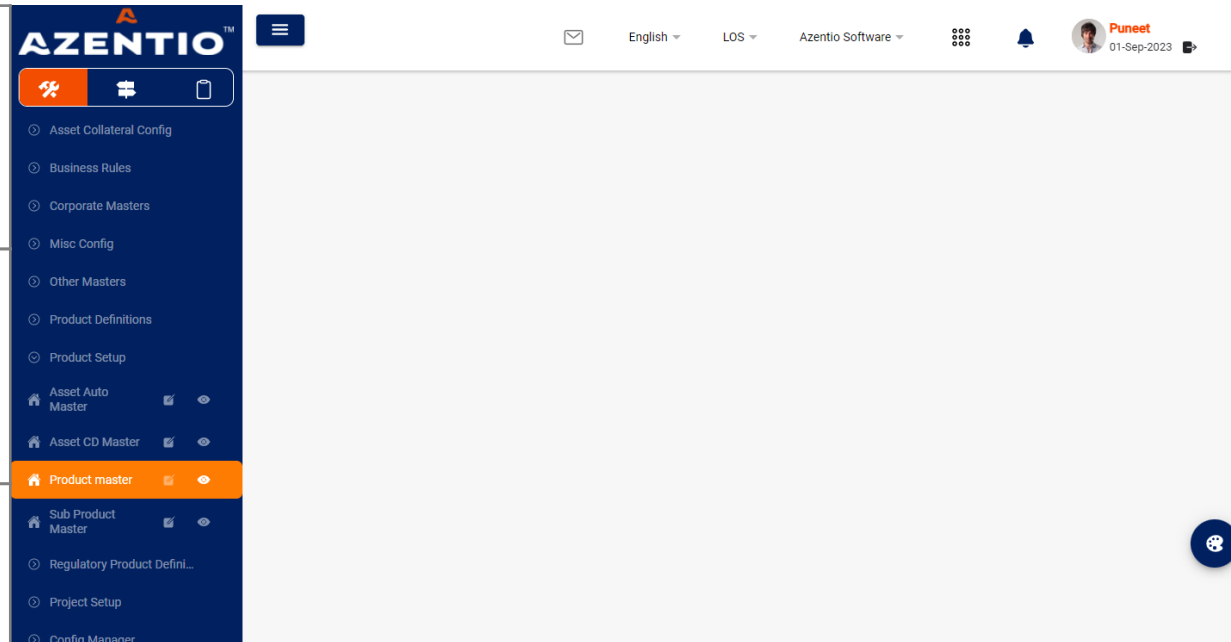
(F) Check the functionality of product
master



(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Product Master - to check the
functionality of status(active/deactive) and
back button

(F) Check the functionality of product
master



(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Product Master - to check the
functionality of status(active/deactive) and
back button

(F) Check the functionality of product
master

The screenshot shows the Azentio Software interface. The left sidebar contains a menu with 'Product master' highlighted. The main area displays a table titled 'Product Master' with columns: Action, Product Group, Product Code, Product Description, Retail/Corporate, Status, and Authorization Status. The table lists five products, all with a status of 'Active'. A pagination bar at the bottom shows 'Showing 26 to 30 of 124 entries' and a page number '5'.

Action	Product Group	Product Code	Product Description	Retail/Corporate	Status	Authorization Status
	98303275	depo31	Ok	R	Active	
	98303275	depo30	desc11	R	Active	
	98303249	122		C	Active	
	98303249	dd		R	Active	
	98303249	A		R	Active	

The screenshot shows the Azentio Software interface with a green 'Success' message at the top. The 'Product Master' table is the same as in the first screenshot, but the status of the second product (depo30) has changed to 'In-active'.

Action	Product Group	Product Code	Product Description	Retail/Corporate	Status	Authorization Status
	98303275	depo31	Ok	R	Active	
	98303275	depo30	desc11	R	In-active	
	98303249	122		C	Active	
	98303249	dd		R	Active	
	98303249	A		R	Active	

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Product Master - to check the
functionality of status(active/deactive) and
back button

(F) Check the functionality of product
master

The screenshot shows the Azentio Product Master interface. The left sidebar contains a menu with options like Asset Collateral Config, Business Rules, Corporate Masters, Misc Config, Other Masters, Product Definitions, Product Setup, Asset Auto Master, Asset CD Master, Product master (highlighted), Sub Product Master, Regulatory Product Defini..., Project Setup, and Config Manager. The main area displays a table with columns: Action, Product Group, Product Code, Product Description, Retail/Corporate, Status, and Authorization Status. The table contains five rows of data, all with a status of 'Active'. A success message 'Success' is visible in the top right corner. The bottom of the table shows pagination: 'Showing 26 to 30 of 124 entries' and a page number '5'.

Action	Product Group	Product Code	Product Description	Retail/Corporate	Status	Authorization Status
	98303275	depo31	Ok	R	Active	
	98303275	depo30	desc11	R	Active	
	98303249	122		C	Active	
	98303249	dd		R	Active	
	98303249	A		R	Active	

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Product Master - to check the
functionality of status(active/deactive) and
back button

(F) Check the functionality of product
master

The screenshot shows the Azentio Product Master interface. The left sidebar contains a menu with options like Asset Collateral Config, Business Rules, Corporate Masters, Misc Config, Other Masters, Product Definitions, Product Setup, Asset Auto Master, Asset CD Master, Product master (highlighted), Sub Product Master, Regulatory Product Defini..., Project Setup, and Config Manager. The main area displays a table with columns: Action, Product Group, Product Code, Product Description, Retail/Corporate, Status, and Authorization Status. The table contains five rows of data, all with a status of 'Active'. A success message 'Success' is visible in the top right corner. The bottom of the table shows pagination: 'Showing 26 to 30 of 124 entries' and a page number '5'.

Action	Product Group	Product Code	Product Description	Retail/Corporate	Status	Authorization Status
	98303275	depo31	Ok	R	Active	
	98303275	depo30	desc11	R	Active	
	98303249	122		C	Active	
	98303249	dd		R	Active	
	98303249	A		R	Active	