# Cucumber Report

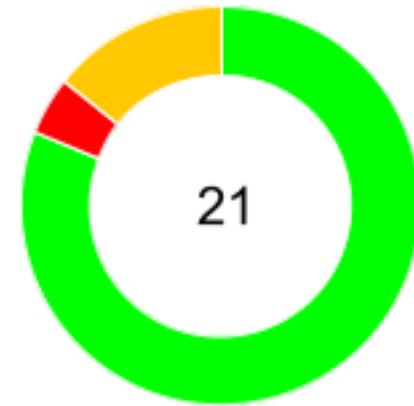| Start : Jul 25, 11:32:12.570 PM | End : Jul 25, 11:32:44.195 PM | Duration : 31.625 s |
|:---:|:---:|:---:|
| Features | Scenarios | Steps |
| PASSED - 0<br>FAILED - 1<br>SKIPPED - 0 | PASSED - 0<br>FAILED - 1<br>SKIPPED - 0 | PASSED - 17<br>FAILED - 1<br>SKIPPED - 3 |



Features: 1



Scenarios: 1



Steps: 21

Pass % gauges:
- Features: 0 %
- Scenarios: 0 %
- Steps: 80 %

| # | Feature Name | T | P | F | S | Duration |
|---|---|---|---|---|---|---|
| 1 | Product Master Retail Functionality | 1 | 0 | 1 | 0 | 31.625 s |

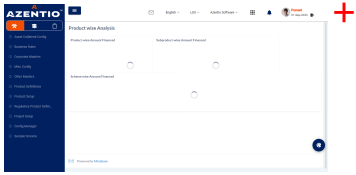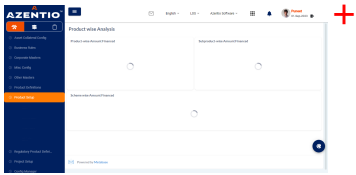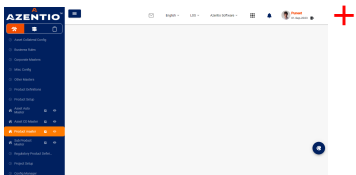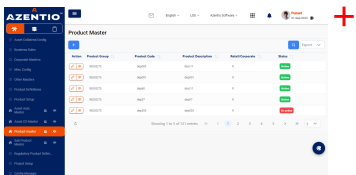| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---|---|---|---|---|---|---|
| 1 | Product Master Retail Functionality | System should not allow user to save the records with invalid data | 21 | 17 | 1 | 3 | 31.621 s |
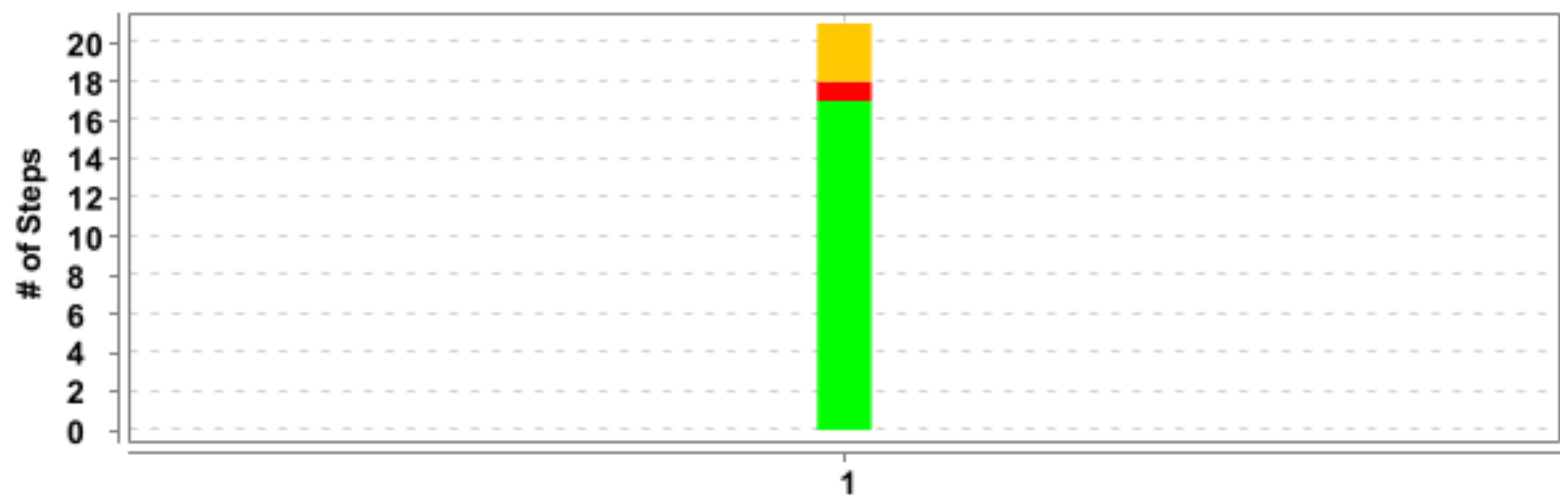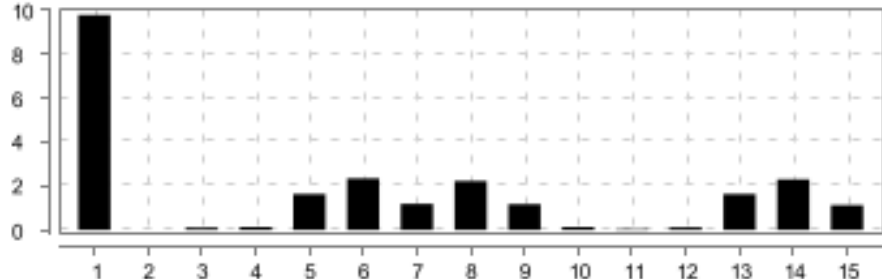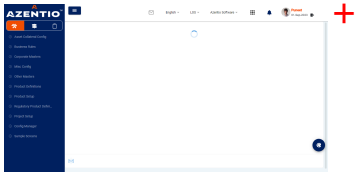
## (F)- Product Master Retail Functionality

| FAILED | DURATION - 31.625 s | Scenarios | | Steps | |
|---|---|---|---|---|---|
| / 11:32:12.570 PM // 11:32:44.195 PM / | | Total - 1 <br> Pass - 0 <br> Fail - 1 <br> Skip - 0 | 1 | Total - 21 <br> Pass - 17 <br> Fail - 1 <br> Skip - 3 | 21 |

## (S)- System should not allow user to save the records with invalid data

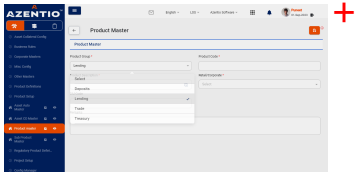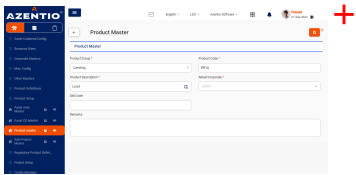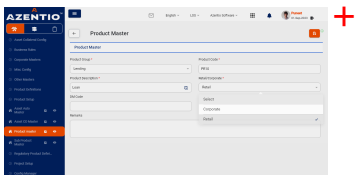| FAILED | DURATION - 31.621 s | | Steps | |
|---|---|---|---|---|
| / 11:32:12.574 PM // 11:32:44.195 PM / | | | Total - 21 <br> Pass - 17 <br> Fail - 1 <br> Skip - 3 | 21 |
| Product Master Retail Functionality | | | | |
| @ProductMaster_Retail_invalid | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| 1 | Given User launch the kuls application | PASSED | 9.770 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.187 s |
| | screenshot | | |
| | | | |
| 2 | And User Login as maker | PASSED | 0.000 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.112 s |
| | screenshot | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| |  | | |
| 3 | Then click on Product Setup | PASSED | 0.100 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.148 s |
| | screenshot<br> | | |
| 4 | Then click on Product Master eye icon | PASSED | 0.140 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.146 s |
| | screenshot<br> | | |
| 5 | Then click on Product Master add button | PASSED | 1.636 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.252 s |
| | screenshot<br> | | |
| 6 | Then verify functionality and asterik mark of the field Product Group | PASSED | 2.352 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.128 s |
| | screenshot | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| |  | | |
| 7 | Then verify functionality and asterik mark of the field Product Code | PASSED | 1.190 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.097 s |
| | screenshot<br> | | |
| 8 | Then verify functionality and asterik mark of the field RetailCorporate | PASSED | 2.221 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.113 s |
| | screenshot<br> | | |
| 9 | Then verify the field Remarks | PASSED | 1.169 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.106 s |
| | screenshot<br> | | |
| 10 | Then click on save button | PASSED | 0.137 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.133 s |
| | screenshot | | |

| # | Step / Hook Details | Status | Duration |
|---|---------------------|--------|----------|
|   |  |  |  |
| 11 | Then validate the impact of any mandatory field blank | PASSED | 0.052 s |
|   | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)<br><br>screenshot<br><br> | PASSED | 0.116 s |
| 12 | Then verify the functionality of Back button | PASSED | 0.124 s |
|   | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)<br><br>screenshot<br><br> | PASSED | 0.169 s |
| 13 | Then click on Product Master add button | PASSED | 1.640 s |
|   | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)<br><br>screenshot<br><br> | PASSED | 0.203 s |
| 14 | Then verify functionality and asterik mark of the field Product Group | PASSED | 2.307 s |
|   | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)<br><br>screenshot | PASSED | 0.128 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| |  | | |
| 15 | Then verify functionality and asterik mark of the field Product Code | PASSED | 1.133 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.102 s |
| | screenshot | | |
| |  | | |
| 16 | Then Enter Product Description | PASSED | 0.165 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.116 s |
| | screenshot | | |
| |  | | |
| 17 | Then verify functionality and asterik mark of the field RetailCorporate | PASSED | 2.232 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.129 s |
| | screenshot | | |
| |  | | |
| 18 | Then verify the field Remarks with special characters value | FAILED | 0.165 s |
| | org.openqa.selenium.ElementNotInteractableException: element not interactable   (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [5190c173aba34861bcd1899ee5cd0dee, sendKeysToElement {id=326a1c31-9b20-4750-935e-946a3ffee184, value=[Ljava.lang.CharSequence;@3313463c}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: | | |

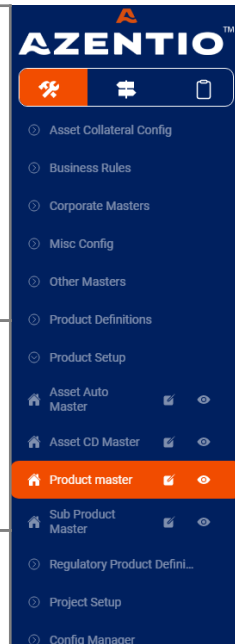| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| | {chromedriverVersion: 98.0.4758.80 (7f0488e8ba0d8..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:51973}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:51973/devtoo..., se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Element: [[ChromeDriver: chrome on WINDOWS (5190c173aba34861bcd1899ee5cd0dee)] -> xpath: //ion-textarea[1]//textarea[1]] Session ID: 5190c173aba34861bcd1899ee5cd0dee<br>  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)<br>  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)<br>  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)<br>  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)<br>  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)<br>  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)<br>  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)<br>  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)<br>  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)<br>  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)<br>  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)<br>  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)<br>  at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:251)<br>  at org.openqa.selenium.remote.RemoteWebElement.sendKeys(RemoteWebElement.java:107)<br>  at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)<br>  at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)<br>  at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)<br>  at java.base/java.lang.reflect.Method.invoke(Method.java:568)<br>  at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:52)<br>  at jdk.proxy2/jdk.proxy2.$Proxy45.sendKeys(Unknown Source)<br>  at stepdefinitions.ProductMaster_Retail.verify_the_field_remarks_with_special_characters_value(ProductMaster_Retail.java:208)<br>  at ?.verify the field Remarks with special characters value(file:///C:/Users/inindc00089/git/Azentio_ULSFramework/AzentioAutomationFramework/src/test/java/features/ProductMaster_Retail.feature:38)<br>* Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.114 s |
| | screenshot<br> | | |
| 19 | Then click on save button | SKIPPED | 0.000 s |
| 20 | Then validate the impact of special characters value in any field | SKIPPED | 0.000 s |
| 21 | Then user logout from the application | SKIPPED | 0.000 s |

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

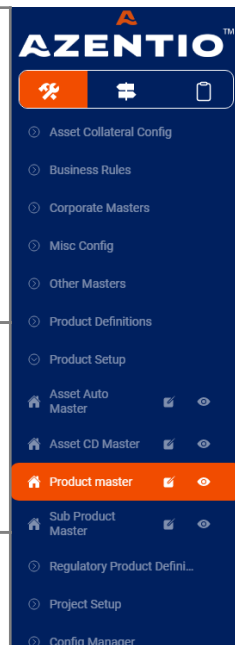(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality



(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

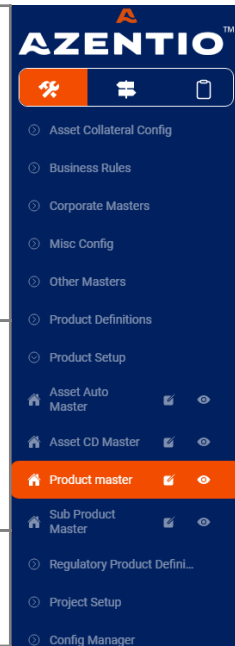(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality



(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

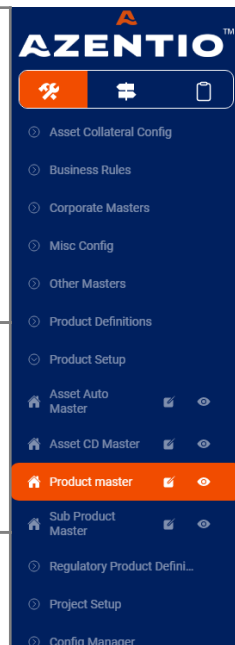(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality



(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality



(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality



(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality



(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality



(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality



(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should not allow user to save the records with invalid data

(F) Product Master Retail Functionality

| | |
|---|---|
| (Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)<br><br>(S) System should not allow user to save the records with invalid data<br><br>(F) Product Master Retail Functionality |  |
| (Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)<br><br>(S) System should not allow user to save the records with invalid data<br><br>(F) Product Master Retail Functionality |  |