Cucumber Report

Start : Oct 18, 2:53:04.155 pm	End : Oct 18, 2:54:11.437 pm	Duration : 1 m 7.282 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 7 FAILED - 1 SKIPPED - 0

Features: 1

Scenarios: 1

Steps: 8

Pass %: 0 %

Pass %: 0 %

Pass %: 87 %

#	Feature Name	T	P	F	S	Duration
1	Check the functionality of the Allocation Masater	1	0	1	0	1 m 7.282 s
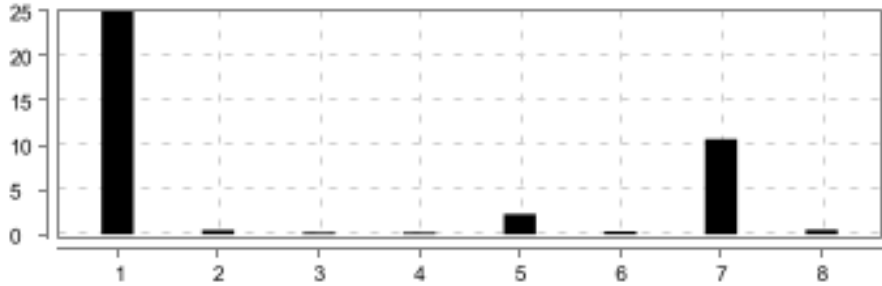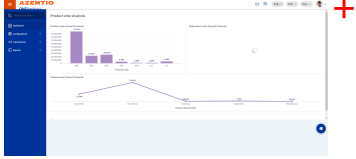
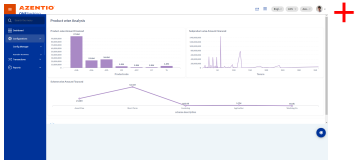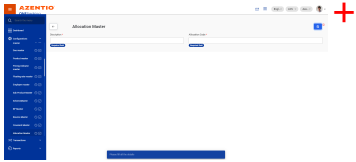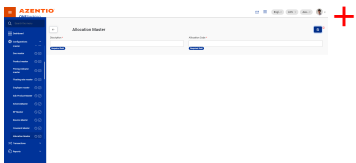| #	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the functionality of the Allocation Masater	To verify the when user keep any mandatory field blank and invalid the system should not allow to save the record	8	7	1	0	1 m 7.277 s

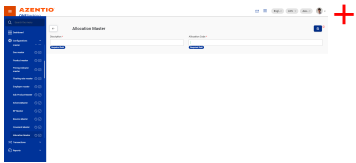## (F)- Check the functionality of the Allocation Masater

FAILED	DURATION - 1 m 7.282 s	Scenarios		Steps	
/ 2:53:04.155 pm // 2:54:11.437 pm /		Total - 1 Pass - 0 Fail - 1 Skip - 0	1	Total - 8 Pass - 7 Fail - 1 Skip - 0	8

(S)- To verify the when user keep any mandatory field blank and invalid the system should not allow to save the record

FAILED	DURATION - 1 m 7.277 s		Steps	
/ 2:53:04.160 pm // 2:54:11.437 pm /			Total - 8	
Check the functionality of the Allocation Masater			Pass - 7 Fail - 1	8
@Allocation_Master_M5			Skip - 0	

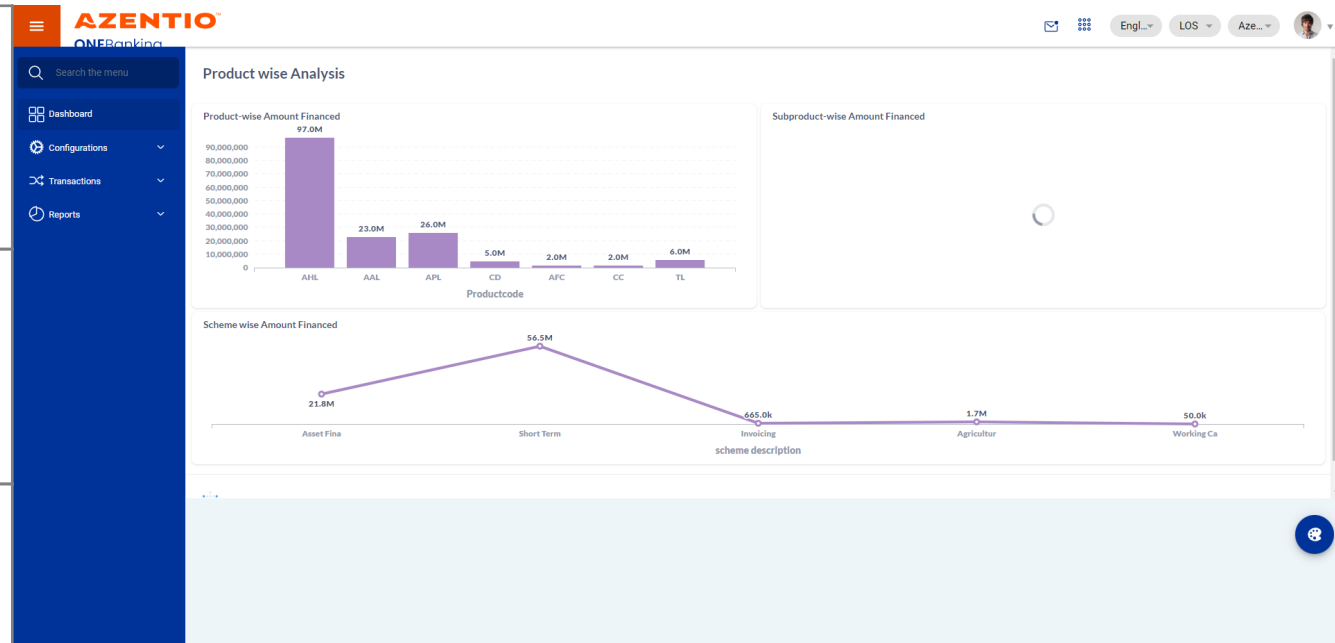| #	Step / Hook Details	Status	Duration
1	Given User Launch the KULS application	PASSED	24.959 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.508 s
	screenshot		
2	Then user click on configurations Tab	PASSED	0.496 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.438 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	When user click Config Manager menu	PASSED	0.218 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.639 s
	screenshot		
4	And Click the eye icon of the alloction master	PASSED	0.215 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.876 s
	screenshot		
5	Then Click the add button in the allocation master	PASSED	2.273 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	1.031 s
	screenshot		
6	Then Save the record in allocation master	PASSED	0.337 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.248 s
	screenshot		

#	Step / Hook Details	Status	Duration
7	And keep the mandatory field as blank and save the record and validate it in allocation master	PASSED	10.660 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.225 s
	screenshot 		
8	Then Validate the save button by filling invalid data	FAILED	0.525 s
	java.lang.IllegalArgumentException: Keys to send should be a not null CharSequence at org.openqa.selenium.remote.RemoteWebElement.sendKeys(RemoteWebElement.java:92) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:52) at jdk.proxy2/jdk.proxy2.$Proxy46.sendKeys(Unknown Source) at stepdefinitions.AllocationMaster.validate_the_save_button_by_filling_in_valid_data(AllocationMaster.java:366) at ?.Validate the save button by filling invalid data(file:///C:/Users/inindc00075/git/Arshath_ULS/Arshath_AzentioULSFramework/src/test/java/features/MDM_Allocation_Mst.feature:128) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.355 s
	screenshot 		

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) To verify the when user keep any mandatory field blank and invalid the system should not allow to save the record
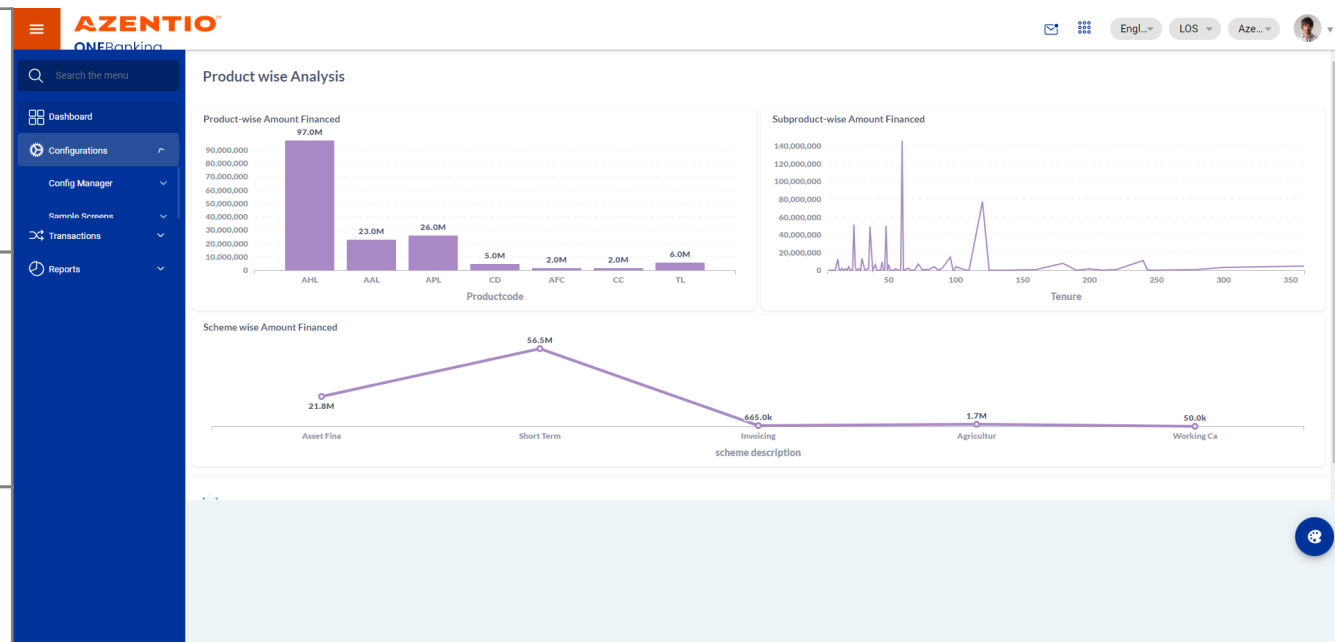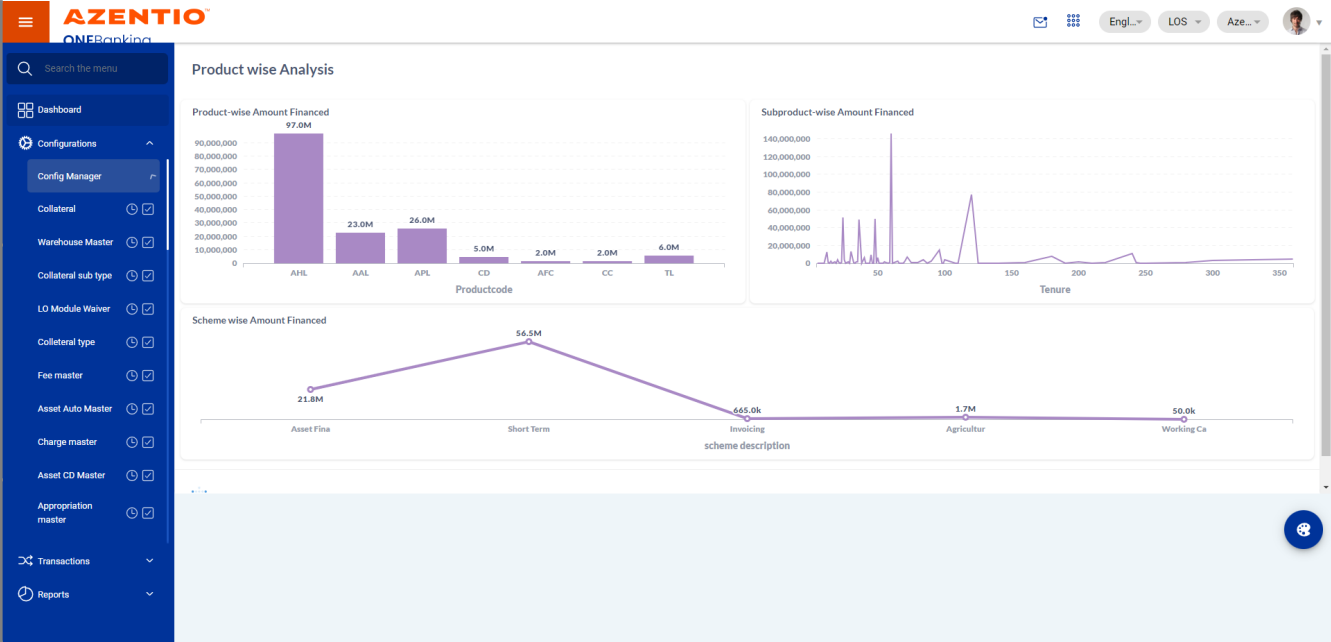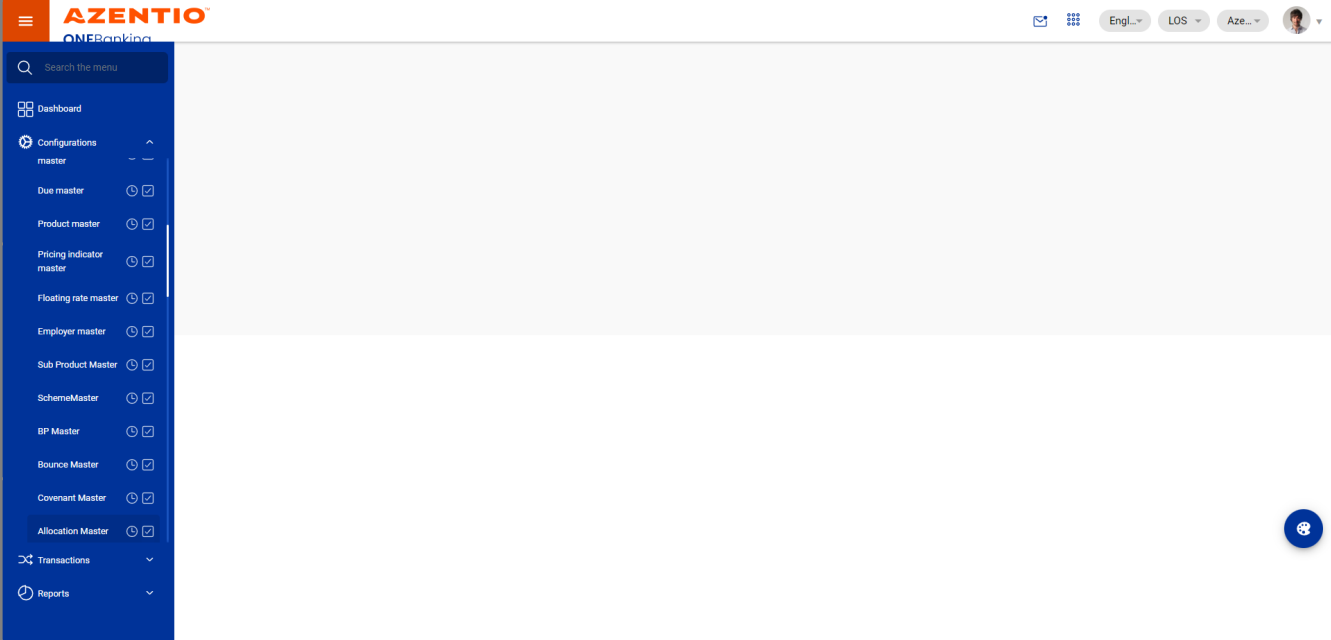
(F) Check the functionality of the Allocation Masater

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) To verify the when user keep any mandatory field blank and invalid the system should not allow to save the record

(F) Check the functionality of the Allocation Masater

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To verify the when user keep any mandatory field blank and invalid the system should not allow to save the record

(F) Check the functionality of the Allocation Masater

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To verify the when user keep any mandatory field blank and invalid the system should not allow to save the record

(F) Check the functionality of the Allocation Masater

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) To verify the when user keep any mandatory field blank and invalid the system should not allow to save the record

(F) Check the functionality of the Allocation Masater

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) To verify the when user keep any mandatory field blank and invalid the system should not allow to save the record

(F) Check the functionality of the Allocation Masater

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) To verify the when user keep any mandatory field blank and invalid the system should not allow to save the record	
(F) Check the functionality of the Allocation Masater	

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) To verify the when user keep any mandatory field blank and invalid the system should not allow to save the record	
(F) Check the functionality of the Allocation Masater	