

Cucumber Report

Jul 22, 2022, 1:15:28 AM

Start : Jul 22, 1:14:23.700 AM

End : Jul 22, 1:15:27.058 AM

Duration : 1 m 3.358 s

Features

Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

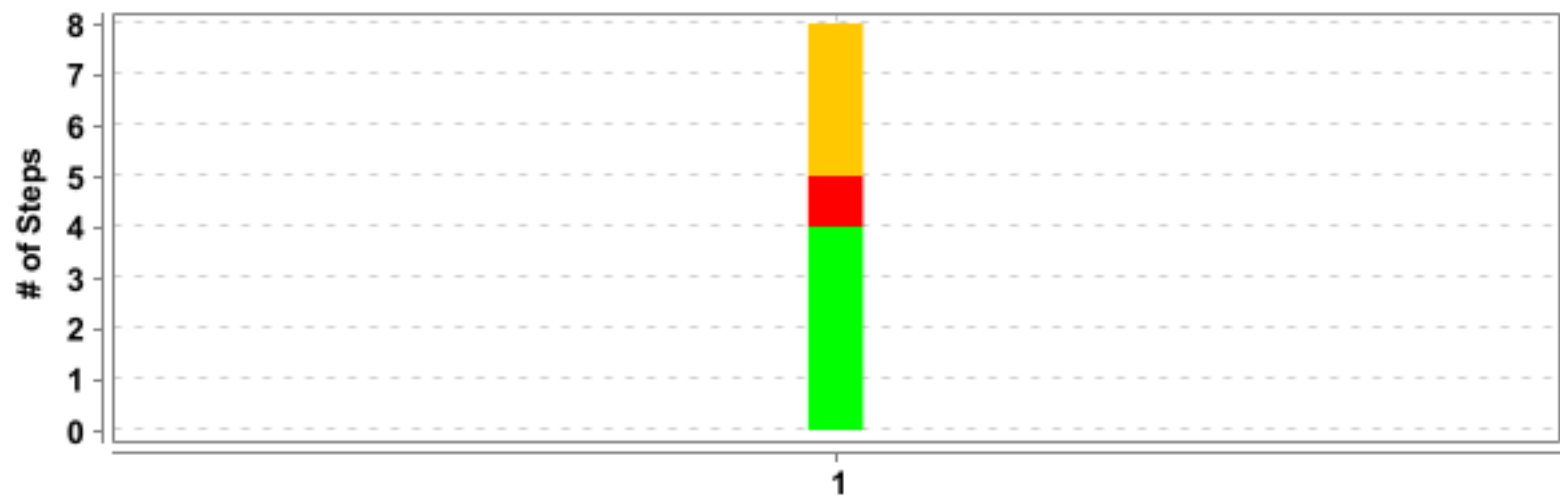
PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 4
FAILED - 1
SKIPPED - 3







#	Feature Name	T	P	F	S	Duration
1	<u>Check the functionality of product master</u>	1	0	1	0	1 m 3.358 s

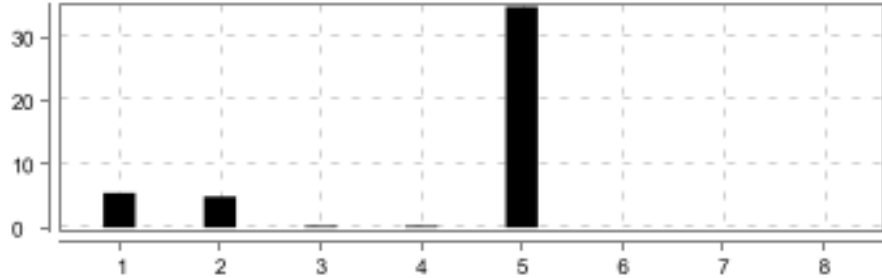



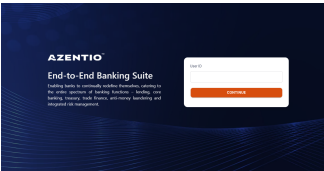
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the functionality of product master	Product Master - to check the functionality of status(active/deactive) and back button	8	4	1	3	1 m 3.338 s

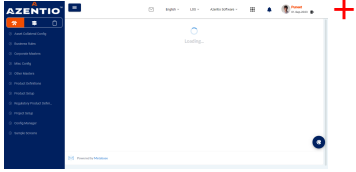
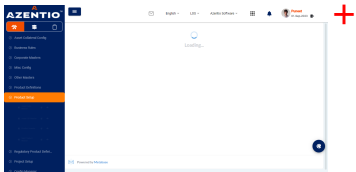
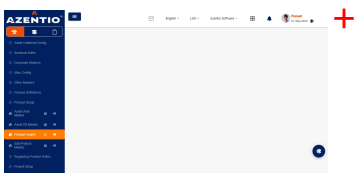
(F)- Check the functionality of product master

FAILED	DURATION - 1 m 3.358 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 8 Pass - 4 Fail - 1 Skip - 3	
/ 1:14:23.700 AM // 1:15:27.058 AM /					

(S)- Product Master - to check the functionality of status(active/deactive) and back button

<div>FAILED</div> <div>DURATION - 1 m 3.338 s</div>		<div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 4</div> <div>Fail - 1</div> <div>Skip - 3</div>	<div></div>
/ 1:14:23.720 AM // 1:15:27.058 AM /				
Check the functionality of product master				
@M9				

#	Step / Hook Details	Status	Duration
1	Given User launch the kuls application	PASSED	5.466 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.379 s
	screenshot		
			
2	And User Login as maker	PASSED	4.895 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.218 s
	screenshot		

#	Step / Hook Details	Status	Duration
			
3	Then user should navigate to product master	PASSED	0.259 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.246 s
	screenshot 		
4	And click on edit view of product master	PASSED	0.233 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.347 s
	screenshot 		
5	Then verify the functionality of status of the record org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=100.0.4896.127) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [8f144d4a83e59b08521ff80f18ef3d06, findElement {using=xpath, value=//span[contains(text(),'depo30')]/../td[6]/p-celleditor/p-tag/span}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.127, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\NINDC~1\AppData\Local\..., goog:chromeOptions: {debuggerAddress: localhost:61546}}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:61546/devtoo..., se:cdpVersion: 100.0.4896.127, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 8f144d4a83e59b08521ff80f18ef3d06 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)	FAILED	34.752 s

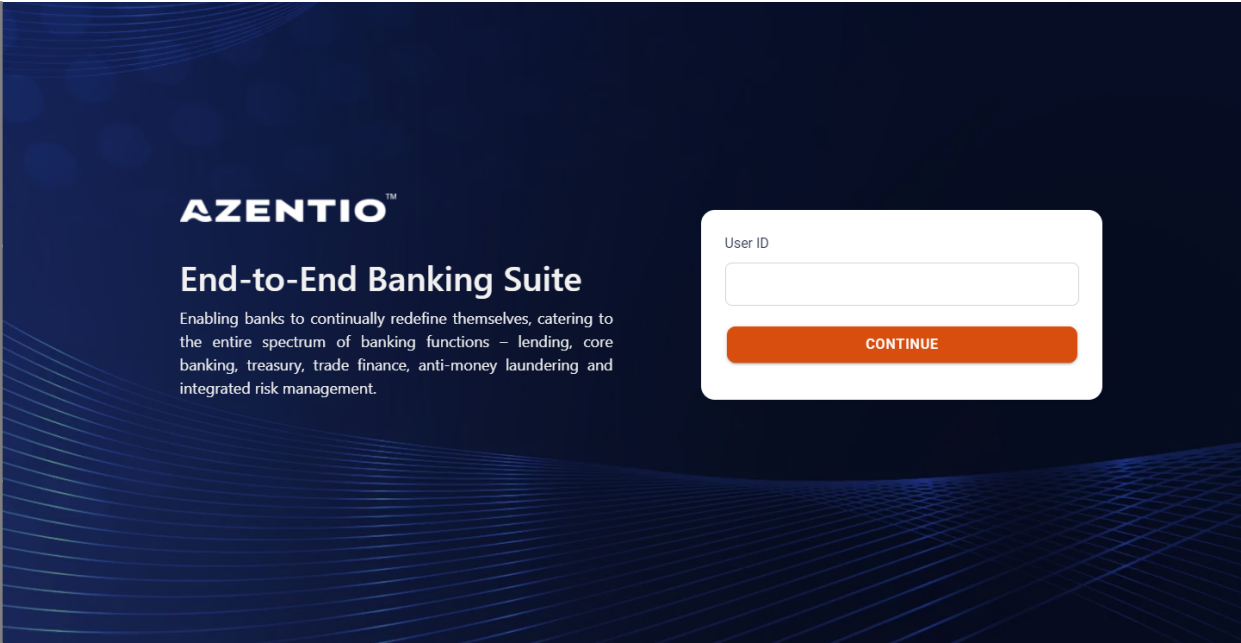
#	Step / Hook Details	Status	Duration
	<pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy45.toString(Unknown Source) at java.base/java.lang.String.valueOf(String.java:4215) at java.base/java.lang.StringBuilder.append(StringBuilder.java:169) at org.openqa.selenium.support.ui.ExpectedConditions\$10.toString(ExpectedConditions.java:298) at java.base/java.lang.String.valueOf(String.java:4215) at java.base/java.lang.StringBuilder.append(StringBuilder.java:169) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:229) at helper.WaitHelper.waitForElementwithFluentwait(WaitHelper.java:93) at stepdefinitions.ProductMaster_Retail.verify_the_functionality_of_status_of_the_record(ProductMaster_Retail.java:385) at ?.verify the functionality of status of the record(file:///C:/Users/inindc00091/git/Azentio_ULS_04/AzentioAutomationFramework/src/test/ java/features/ProductMaster_Retail.feature:80) * Not displayable characters are replaced by '?'. </pre>		
	<p>AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=100.0.4896.127) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [8f144d4a83e59b08521ff80f18ef3d06, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.127, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\ININDC~1\AppData\Local\..., goog:chromeOptions: {debuggerAddress: localhost:61546}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:61546/devtoo..., se:cdpVersion: 100.0.4896.127, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 8f144d4a83e59b08521ff80f18ef3d06 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) </pre>	FAILED	12.194 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347) at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		
6	Then verify user can able to change the status from active to deactivate	SKIPPED	0.000 s
7	Then verify user can able to change the status from deactivate to active	SKIPPED	0.000 s
8	Then verify the functionality of back button	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario) org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=100.0.4896.127) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [8f144d4a83e59b08521ff80f18ef3d06, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.127, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\ININDC~1\AppData\Local\..., goog:chromeOptions: {debuggerAddress: localhost:61546}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:61546/devtoo..., se:cdpVersion: 100.0.4896.127, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 8f144d4a83e59b08521ff80f18ef3d06 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432) at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)	FAILED	0.224 s

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Product Master - to check the
functionality of status(active/deactive) and
back button

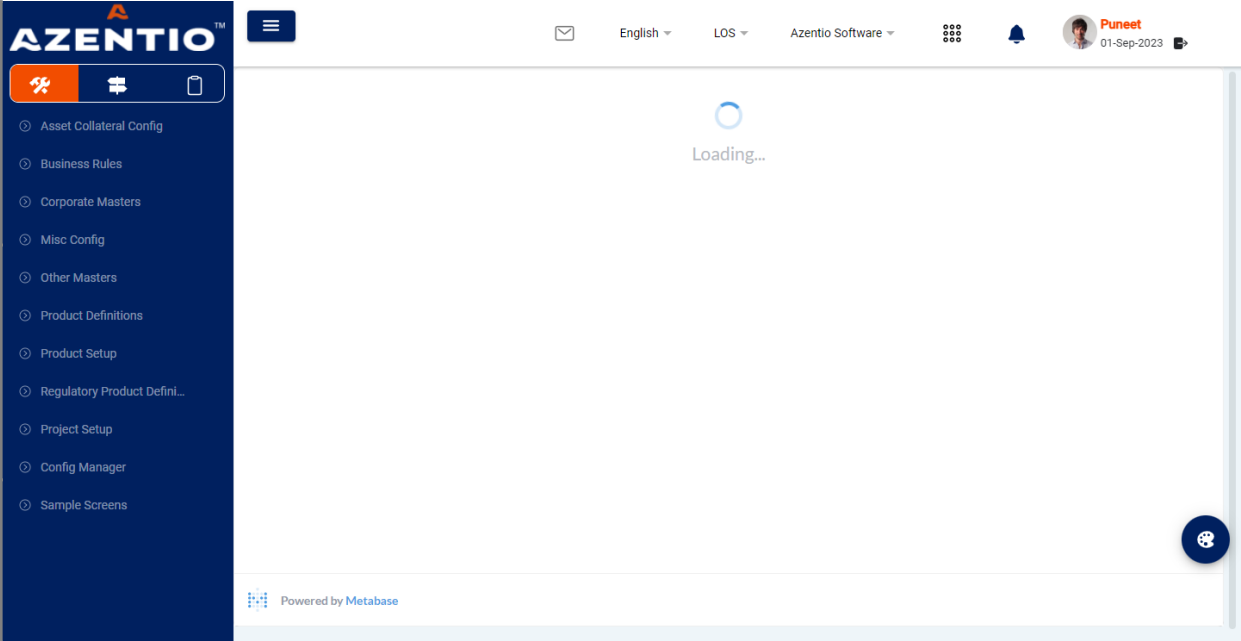
(F) Check the functionality of product
master

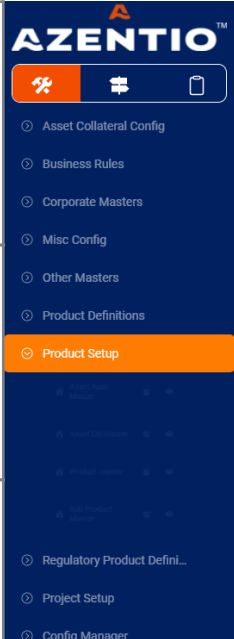
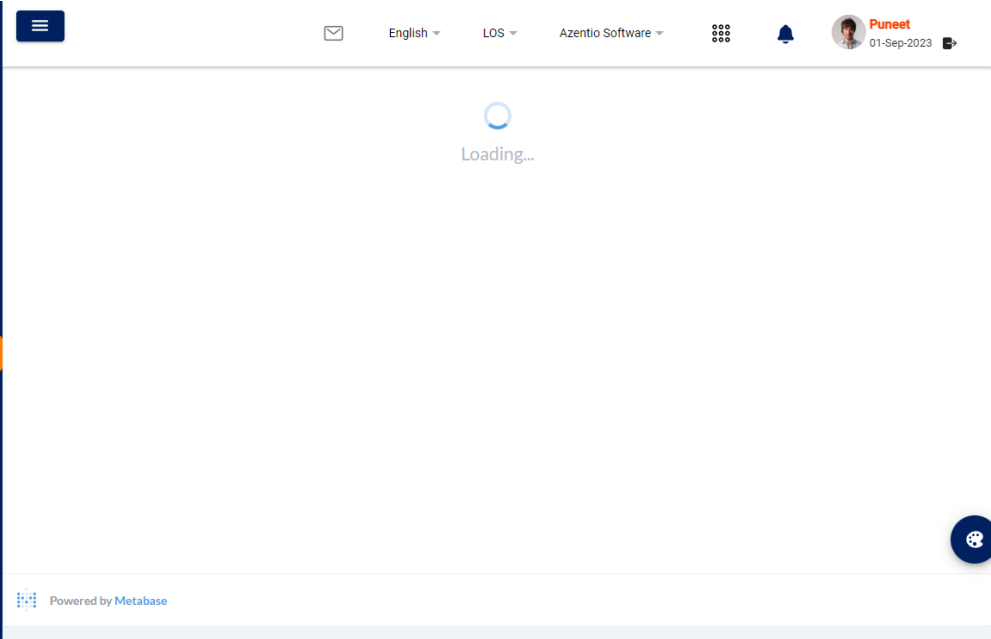


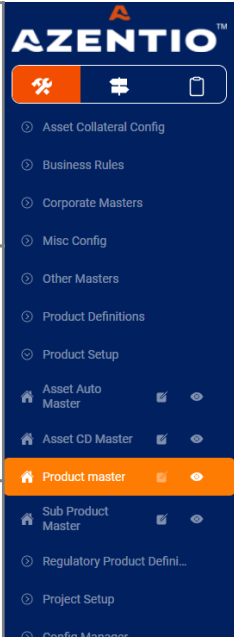
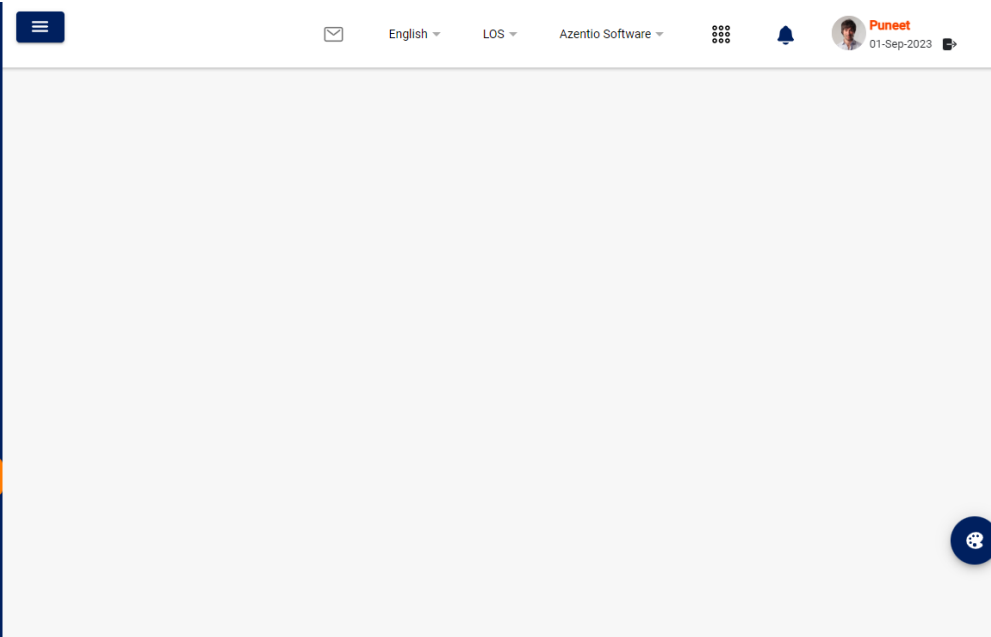
(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Product Master - to check the
functionality of status(active/deactive) and
back button

(F) Check the functionality of product
master



<p>(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)</p>		
<p><u>(S) Product Master - to check the functionality of status(active/deactive) and back button</u></p>		
<p><u>(F) Check the functionality of product master</u></p>		

<p>(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)</p>		
<p><u>(S) Product Master - to check the functionality of status(active/deactive) and back button</u></p>		
<p><u>(F) Check the functionality of product master</u></p>		