Cucumber Report

Start : Jul 19, 1:16:49.694 PM	*End : Jul 19, 1:17:04.842 PM*	*Duration : 15.148 s*
Features	Scenarios	Steps

Features	Scenarios	Steps
PASSED - 0 *FAILED - 1* *SKIPPED - 0*	*PASSED - 0* *FAILED - 1* *SKIPPED - 0*	*PASSED - 0* *FAILED - 1* *SKIPPED - 1*

#	Feature Name	T	P	F	S	Duration
1	Login Functionality of kuls	1	0	1	0	15.148 s
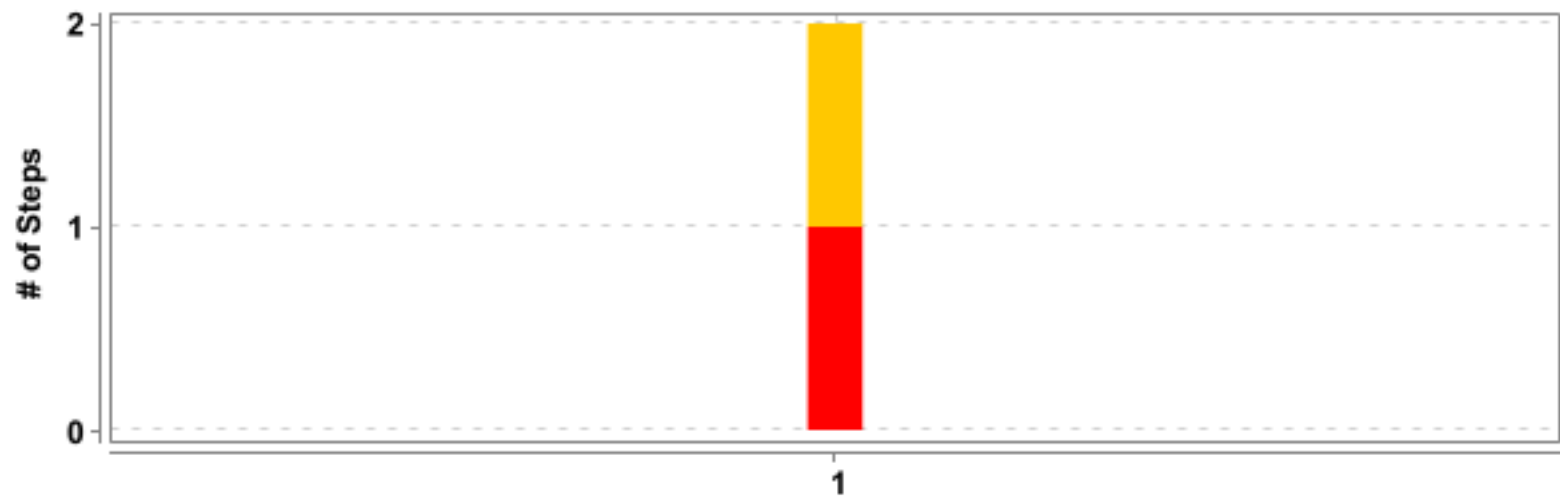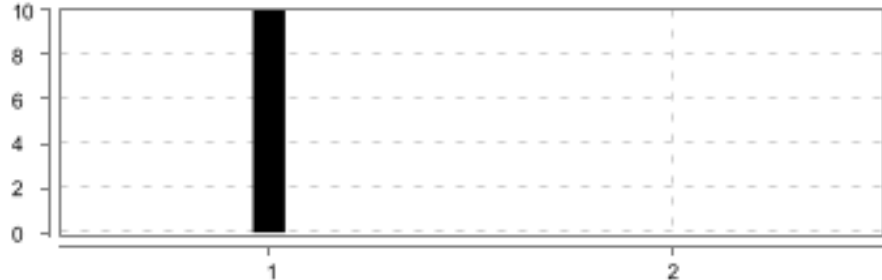
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Login Functionality of kuls	Login KULS with valid credentials	2	0	1	1	15.142 s
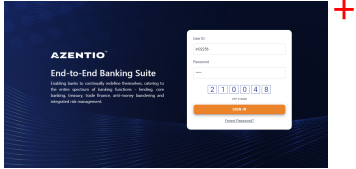
(F)- Login Functionality of kuls

FAILED	DURATION - 15.148 s	Scenarios		Steps	
		Total - 1		Total - 2	
/ 1:16:49.694 PM // 1:17:04.842 PM /		Pass - 0	1	Pass - 0	2
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 1	

(S)- Login KULS with valid credentials

FAILED	DURATION - 15.142 s		Steps	
			Total - 2	
/ 1:16:49.700 PM // 1:17:04.842 PM /			Pass - 0	2
Login Functionality of kuls			Fail - 1	
			Skip - 1	

#	Step / Hook Details	Status	Duration
1	Given User launch the kuls application	FAILED	9.984 s
	org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//ion-header/ion-toolbar[1]/img[1]"} (Session info: chrome=100.0.4896.127) For documentation on this error, please visit: https://selenium.dev/exceptions/ #no_such_element Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [5afc362fd32e1b089002631cff56fdc2, findElement {using=xpath, value=//ion-header/ion-toolbar[1]/img[1]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.127, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:63743}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:63743/devtoo..., se:cdpVersion: 100.0.4896.127, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 5afc362fd32e1b089002631cff56fdc2 　　at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) 　　at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) 　　at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) 　　at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) 　　at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) 　　at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) 　　at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) 　　at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at stepdefinitions.KULS_Application_Login.loginUlsApplicationAsMaker(KULS_Application_Login.java:44) at stepdefinitions.KULS_Login.user_launch_the_kuls_application(KULS_Login.java:28) at ?.User launch the kuls application(file:///C:/Users/inindc00091/git/Azentio_ULS_04/AzentioAutomationFramework/src/test/java/features/KULS_Login.feature:3) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.818 s
2	And User Login as maker	SKIPPED	0.000 s

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Login KULS with valid credentials

(F) Login Functionality of kuls

AZENTIO™

End-to-End Banking Suite

Enabling banks to continually redefine themselves, catering to the entire spectrum of banking functions – lending, core banking, treasury, trade finance, anti-money laundering and integrated risk management.

User ID

in02256

Password

•••••

2 1 0 0 4 8

OTP 210048

SIGN IN

Forgot Password?