
Start: Jul 19, 1:06:17.714 PM End: Jul 19, 1:06:21.832 PM **Duration: 4.118 s** Scenarios Steps **Features** PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 2 40 50 60 40 50 60 40 50 60 30 Pass % 70 30 Pass % 70 30 Pass % 70 20 80 20 20 80 80 90 90 100

FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	Login Functionality of kuls	1	0	1	0	4.118 s

SCENARIOS SUMMARY -- 3 --

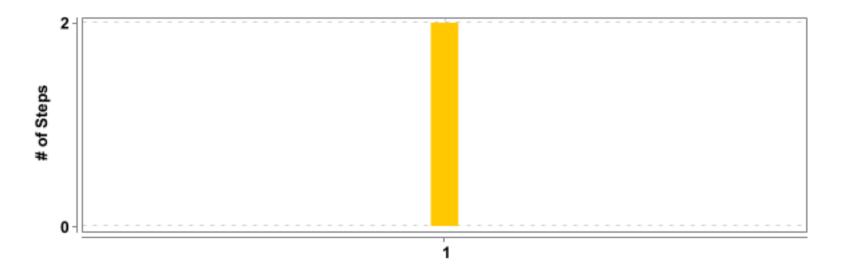


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Login Functionality of kuls	Login KULS with valid credentials	2	0	0	2	4.114 s

DETAILED SECTION -- 4 --

(F)- Login Functionality of kuls

FAILED	DURATION - 4.118 s	Scenarios		Steps	
		Total - 1		Total - 2	
/ 1:06:17.714 PI	M // 1:06:21.832 PM /	Pass - 0	1	Pass - 0	2
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 2	

(S)- Login KULS with valid credentials

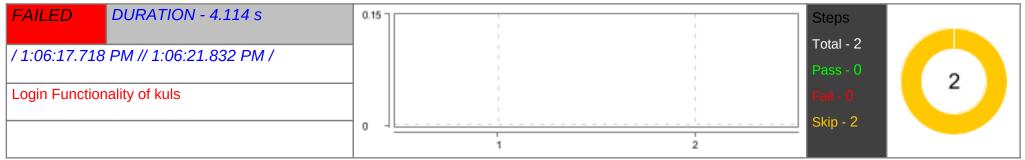

Status	Duration
FAILED 4	4.063 s
FAILED	4.063 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.chrome.ChromeDriver. <init>(ChromeDriver.java:41) at resources.BaseClass.initializeDriver(BaseClass.java:28) at stepdefinitions.HooksClass.browserSetup(HooksClass.java:32)</init>		
1	Given User launch the kuls application	SKIPPED	0.000 s
2	And User Login as maker	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.022 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.close()" because "this.driver" is null at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		