


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	Check the functionality of Customer Address Details screen	1	0	1	0	4 m 11.404 s

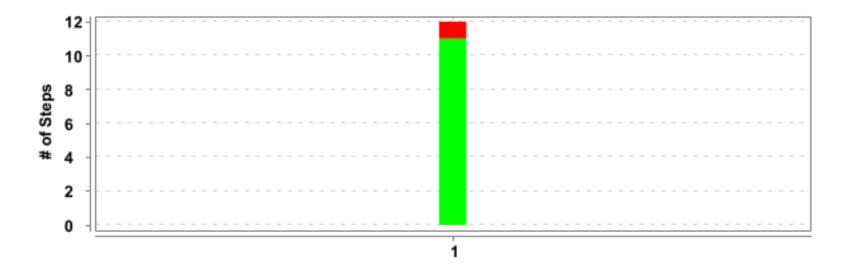


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the functionality of Customer	Verify the Customer Address Information Parameter details	12	11	1	0	4 m 11.397 s
	Address Details screen	List view					

DETAILED SECTION -- 4 --

(F)- Check the functionality of Customer Address Details screen

FAILED	DURATION - 4 m 11.404 s	Scenarios		Steps	
		Total - 1		Total - 12	
/ 12:15:11.792 A	AM // 12:19:23.196 AM /	Pass - 0	1	Pass - 11	12
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	

(S)- Verify the Customer Address Information Parameter details List view

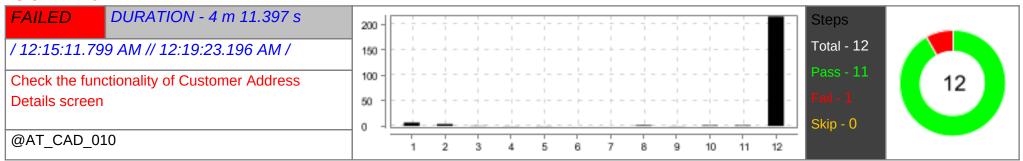

#	Step / Hook Details	Status	Duration
1	Given User launch the kuls application	PASSED	6.871 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.488 s
	screenshot		
	AZENTIO Miles and Const.		
2	And User Login as maker	PASSED	3.786 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	1.141 s
	screenshot		

3 Then user should click on the menu toggle AFTER_STEP - stepdefinitions. HooksClass. addScreenshot((o.cucumber.java.Scenario) 4 Then click on inbox to search for the Customer Address Details record AFTER_STEP - stepdefinitions. HooksClass. addScreenshot((o.cucumber.java.Scenario) Screenshot 4 Then click on inbox to search for the Customer Address Details record AFTER_STEP - stepdefinitions. HooksClass. addScreenshot((o.cucumber.java.Scenario) AFTER_STEP - stepdefinitions. HooksClass. addScreenshot((o.cucumber.java.Scenario)) AFTER_STEP - stepdefinitions. HooksClass. addScreenshot((o.cucumber.java.Scenario))	#	Step / Hook Details	Status	Duration
AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.329 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) Screenshot Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.274 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.274 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.108 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.217 s		© ANNIO		
screenshot Then click on inbox to search for the Customer Address Details record AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.2074 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.217 s	3		PASSED	
4 Then click on inbox to search for the Customer Address Details record PASSED 0.269 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.397 s 5 Then click on search button to search the record of Customer Address Details PASSED 0.274 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.237 s creenshot PASSED 0.274 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.237 s 6 Then enter the reference id of the Customer Address Details record PASSED 0.108 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.217 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.329 s
4 Then click on inbox to search for the Customer Address Details record AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 5 Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.108 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.217 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.397 s 0.274 s 0.237 s				
Screenshot Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.274 s 0.237 s 0.237 s	4	Then click on inbox to search for the Customer Address Details record	PASSED	0.269 s
5 Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 6 Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.274 s 0.237 s 0.237 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.397 s
5 Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 6 Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.274 s 0.237 s 0.237 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 6 Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.237 s 0.237 s 0.237 s				
Screenshot 6 Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.108 s 0.217 s	5	Then click on search button to search the record of Customer Address Details	PASSED	0.274 s
6 Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io. cucumber. java. Scenario) PASSED 0.108 s 0.217 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.237 s
6 Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.108 s 0.217 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.217 s		State Stat		
	6	Then enter the reference id of the Customer Address Details record	PASSED	0.108 s
screenshot		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.217 s
		screenshot		

7 Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) 8 Then click on the Additional customer info tab in Customer Personal Information screen AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) 9 Then select the Customer Address details record from the customer personal detail screen AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) 9 Then select the Customer Address details record from the customer personal detail screen AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) 9 Then select the record of Address details from the customer identification screen AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.515 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.644 s 1.472 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.644 s	#	Step / Hook Details	Status	Duration
AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) 8 Then click on the Additional customer info tab in Customer Personal Information screen AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) 9 Then select the Customer Address details record from the customer personal detail screen AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) 9 Then select the Customer Address details record from the customer personal detail screen AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) 9 Then select the record of Address details from the customer identification screen AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) 10 Then select the record of Address details from the customer identification screen AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.472 s PASSED 0.644 s		Cartillo		
Screenshot 8 Then click on the Additional customer info tab in Customer Personal Information screen AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) 9 Then select the Customer Address details record from the customer personal detail screen AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) Screenshot 10 Then select the record of Address details from the customer identification screen AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 1.472 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.684 s	7	Then click on the entitle button of the Customer Address Details record of that reference id	PASSED	0.199 s
8 Then click on the Additional customer into tab in Customer Personal Information screen AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) 9 Then select the Customer Address details record from the customer personal detail screen AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) Screenshot 10 Then select the record of Address details from the customer identification screen AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 1.472 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 1.472 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.684 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.216 s
8 Then click on the Additional customer info tab in Customer Personal Information screen AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) 9 Then select the Customer Address details record from the customer personal detail screen AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) passed 0.515 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) passed 1.551 s 0.687 s 0.515 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) passed 1.552 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.472 s PASSED 0.644 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 9 Then select the Customer Address details record from the customer personal detail screen AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 10 Then select the record of Address details from the customer identification screen AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.472 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.684 s		ACRITICS OF B 1 (000 000 000 000 000 000 000 000 000		
Screenshot 9 Then select the Customer Address details record from the customer personal detail screen AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 10 Then select the record of Address details from the customer identification screen AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.472 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.644 s	8	Then click on the Additional customer info tab in Customer Personal Information screen	PASSED	1.551 s
9 Then select the Customer Address details record from the customer personal detail screen AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 10 Then select the record of Address details from the customer identification screen AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.472 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.644 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.687 s
9 Then select the Customer Address details record from the customer personal detail screen AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 10 Then select the record of Address details from the customer identification screen AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.472 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.515 s PASSED 0.644 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 10 Then select the record of Address details from the customer identification screen AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.472 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.930 s		A SERVICE THE PART OF THE PAR		
Screenshot 10 Then select the record of Address details from the customer identification screen AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.644 s	9	Then select the Customer Address details record from the customer personal detail screen	PASSED	0.515 s
10 Then select the record of Address details from the customer identification screen AFTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io. cucumber.java. Scenario) PASSED 0.644 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.930 s
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.644 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.644 s		CHIED DOMA		
	10	Then select the record of Address details from the customer identification screen	PASSED	1.472 s
screenshot		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.644 s
		screenshot		


#	Step / Hook Details	Status	Duration
	### ACCUPATION		
11	Then Verify the functionality of Back button on List view of Customer Address details	PASSED	1.231 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.209 s
	screenshot		
	ACCOUNTS COMMAND CO		
12	Then verify search box should display matching record with matched data of Customer Address details	FAILED	3 m 36.128 s
	org.openga.selenium.TimeoutException: Expected condition failed: waiting for visibility of Proxy element for: DefaultElementLocator 'By.xpath: //ion-modal/descendant::div/div[3]/span/i" (tried for 10 second(s) with 500 milliseconds interval) at org.openga.selenium.support.ui.FluentWait.until(FluentWait.java:231) at helper.WaitHelper.waitForElementwithFluentwait(WaitHelper.java:92) at stepdefinitions.CustomerAddressDetails. verify_search_box_should_display_matching_record_with_matched_data_of_customer_address_details(CustomerAddressDetails.java:543) at ?.verify search_box_should_display_matching_record_with_matched_data_of_customerAddressDetails.feature:106) Caused by: org.openga.selenium.NoSuchElementException: no such element: Unable to locate element: ("method"."xpath", "selector": "/ion-modal/descendant::div/div[3]/span/i") (Session info: chrome=100.0.4896.60) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8RU', ip: '10.1.47.121', os. name: 'Windows 10', os. arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openga.selenium.chrome.ChromeDriver Command: [634a9b45bc729cd95ba26b1bc1e353a5, findElement {using=xpath, value=//ion-modal/descendant::div/div[3]/span/i)} Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.60, chrome: (chromedriverVersion: 99.0.484.51) (d537ec02474b5, userDataDir: C:\Users\ININDC~1\AppDataL\L), goog:chromeOptions: (debuggerAddress: localhost:55884/), javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:55884/devtoo, se:cdpVersion: 100.0.4896.60, setWindowRect: true, strictFileInteractability: false, timeouts: (implicit: 0, pageLoad: 300000, script: 30000), unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webaut		


#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		
	at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162)		
	at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373)		
	at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70)		
	at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39)		
	at jdk.proxy2/jdk.proxy2.\$Proxy46.isDisplayed(Unknown Source)		
	at org.openqa.selenium.support.ui.ExpectedConditions.elementlfVisible(ExpectedConditions.java:307)		
	at org.openqa.selenium.support.ui.ExpectedConditions.access\$000(ExpectedConditions.java:40)		
	at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:293)		
	at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:290)		
	at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:208)		
	at helper.WaitHelper.waitForElementwithFluentwait(WaitHelper.java:92)		
	at stepdefinitions.CustomerAddressDetails.		
	verify_search_box_should_display_matching_record_with_matched_data_of_customer_address_details(CustomerAddressDetails.java:543)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:568)		
	at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)		
	at io.cucumber.java.Invoker.invoke(Invoker.java:24)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:64)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:104)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:71)		
	at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$0(TestNGCucumberRunner.java:116)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:117)		
	at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:113)		
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:31)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)		


DETAILED SECTION -- 9 --

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:568)		
	at org.testng.internal.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:133)		
	at org.testng.internal.TestInvoker.invokeMethod(TestInvoker.java:598)		
	at org.testng.internal.TestInvoker.invokeTestMethod(TestInvoker.java:173)		
	at org.testng.internal.MethodRunner.runInSequence(MethodRunner.java:46)		
	at org.testng.internal.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:824)		
	at org.testng.internal.TestInvoker.invokeTestMethods(TestInvoker.java:146)		
	at org.testng.internal.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:146)		
	at org.testng.internal.TestMethodWorker.run(TestMethodWorker.java:128)		
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1511)		
	at org.testng.TestRunner.privateRun(TestRunner.java:794)		
	at org.testng.TestRunner.run(TestRunner.java:596)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:377)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:371)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:332)		
	at org.testng.SuiteRunner.run(SuiteRunner.java:276)		
	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:53)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:96)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1212)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1134)		
	at org.testng.TestNG.runSuites(TestNG.java:1063)		
	at org.testng.TestNG.run(TestNG.java:1031)		
	at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115)		
	at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251)		
	at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77)		
4	* Not displayable characters are replaced by '?'.		
/	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.245 s
5	screenshot		
	Application		


EXPANDED SECTION -- 10 --

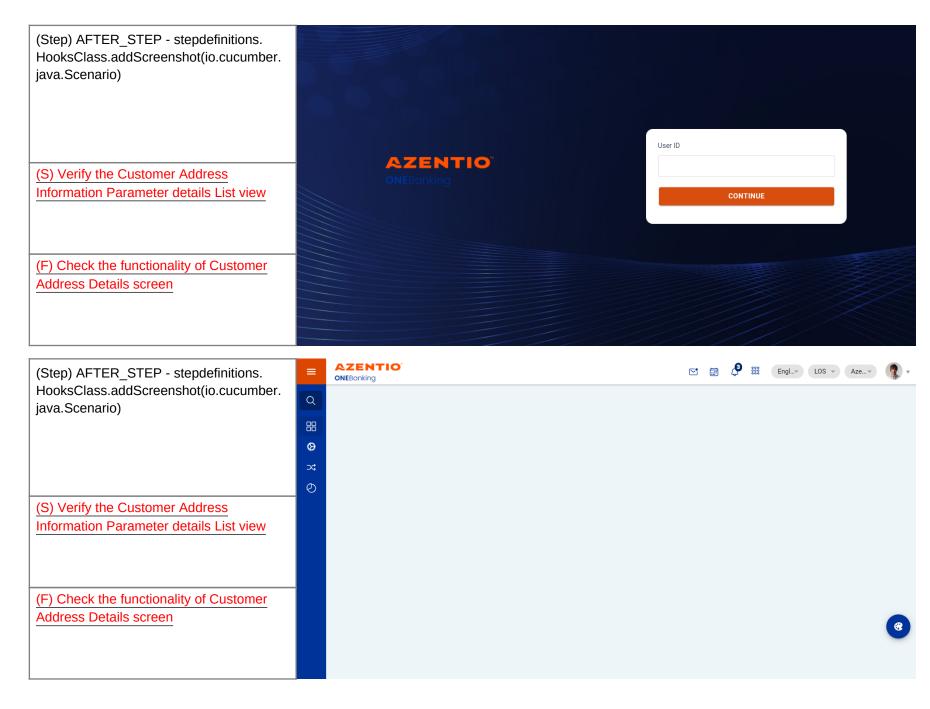

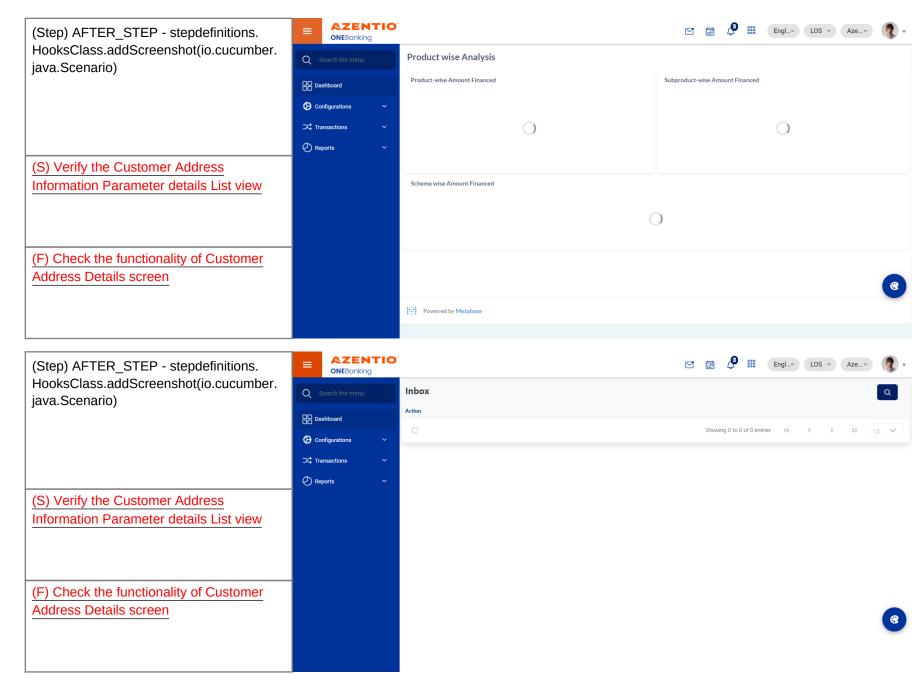


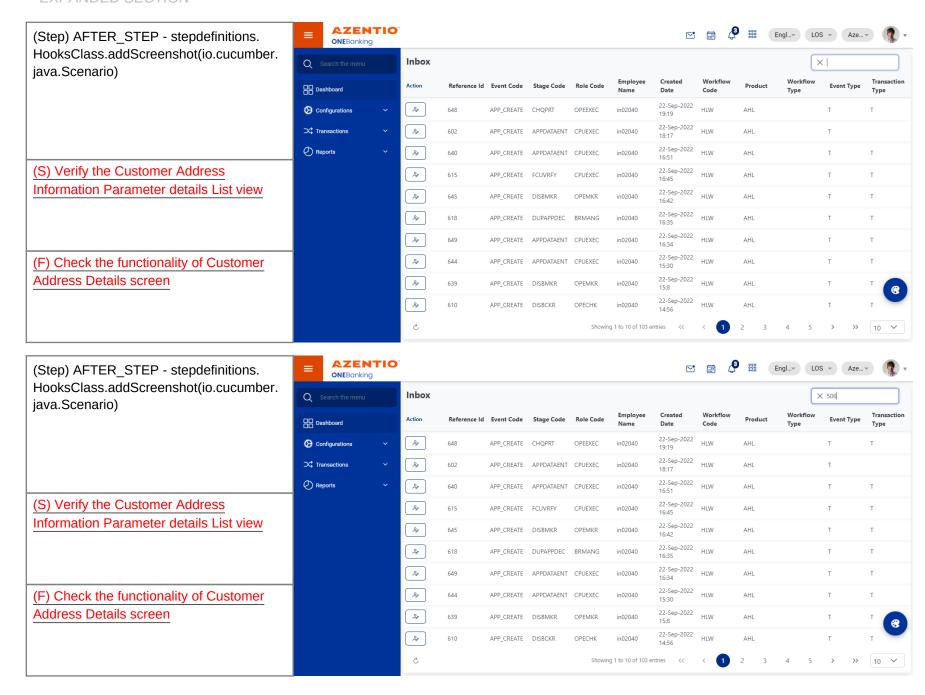

EXPANDED SECTION -- 13 --

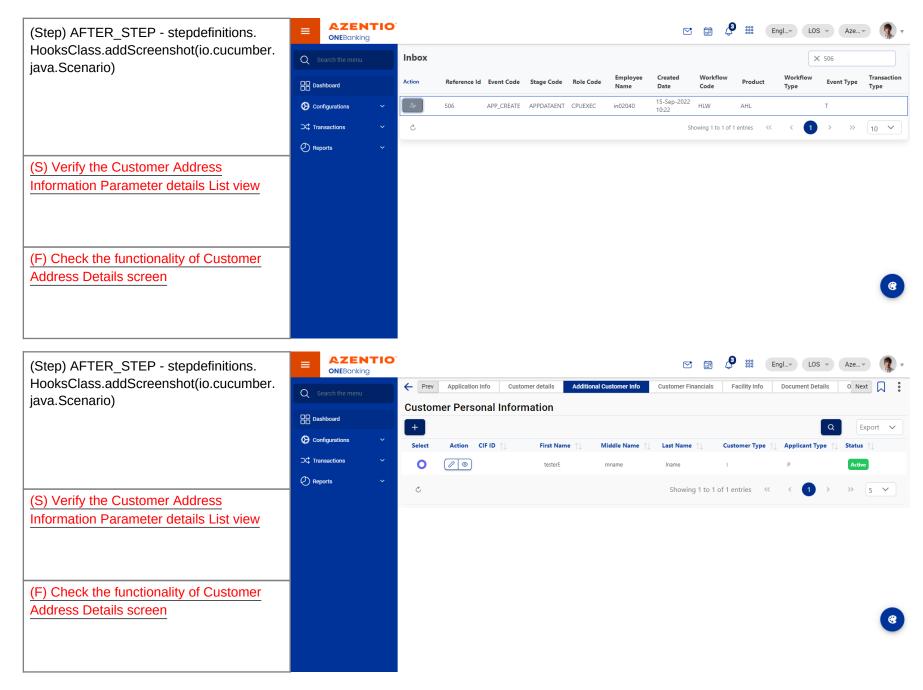

EXPANDED SECTION -- 14 --

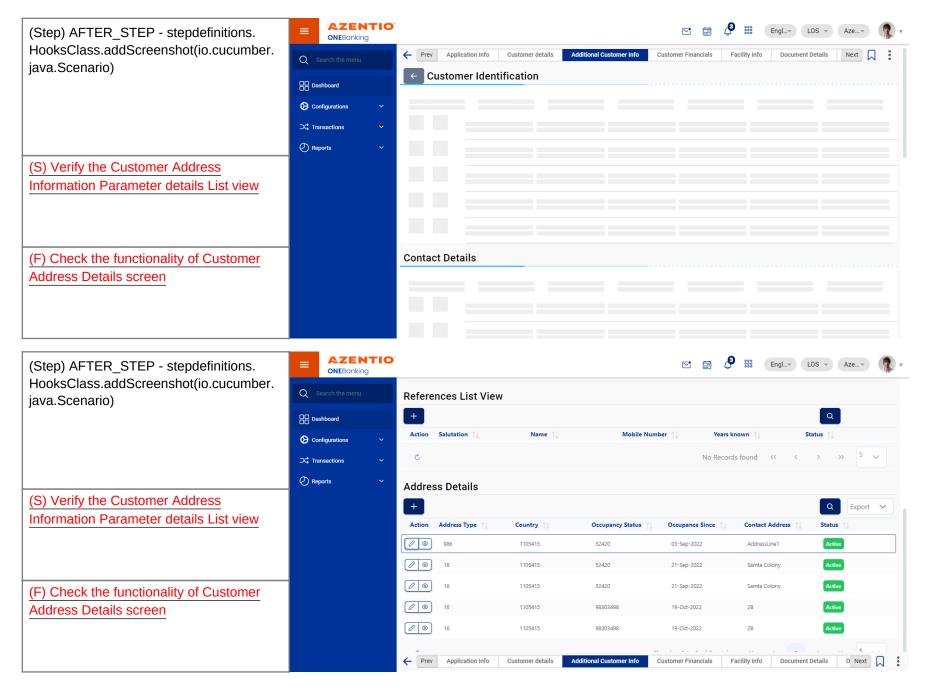

EXPANDED SECTION -- 15 --

