

FEATURES SUMMARY -- 2 --



| # | Feature Name | T | P | F | S | Duration |
|---|---|---|---|---|---|--------------|
| 1 | Check the functionality of the Allocation Masater | 1 | 1 | 0 | 0 | 2 m 54.192 s |




| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---|---|----|----|---|---|--------------|
| 1 | Check the functionality of the Allocation | To verify the Creation of Allocation master detail with valid | 10 | 10 | 0 | 0 | 2 m 54.097 s |
| | Masater | data | | | | | |

(F)- Check the functionality of the Allocation Masater

| PASSED | DURATION - 2 m 54.192 s | Scenarios | | Steps | |
|------------------|-------------------------|-----------|---|------------|----|
| | | Total - 1 | | Total - 10 | |
| / 5:25:45.664 pm | // 5:28:39.856 pm / | Pass - 1 | 1 | Pass - 10 | 10 |
| | | Fail - 0 | | Fail - 0 | |
| | | Skip - 0 | | Skip - 0 | |

(S)- To verify the Creation of Allocation master detail with valid data

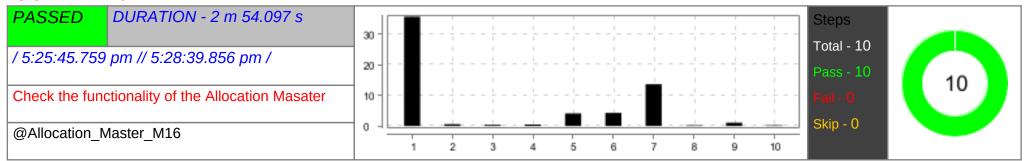


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given User Launch the KULS application | PASSED | 35.765 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 2.131 s |
| | screenshot | | |
| | | | |
| 2 | Then user click on configurations Tab | PASSED | 0.590 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 1.061 s |
| | screenshot | | |
| | ASERTIC # 1 NO | | |

| AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) And Click the eye icon of the alloction master AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) FASSED AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) Then Click the first eye icon in allocation master list view AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) FASSED AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) AAD Choose the allocation based value in allocation detail AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) PASSED 0.444 s 0.4 | # | Step / Hook Details | Status | Duration |
|--|---|--|--------|----------|
| And Click the eye icon of the allocation master AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Then Click the first eye icon in allocation master list view AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.524 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 4.255 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 4.256 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.524 s 4.255 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) And Choose the allocation based value in allocation detail AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.669 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.67 And Choose the allocation based value in allocation detail AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.68 s | 3 | When user click Config Manager menu | PASSED | 0.395 s |
| And Click the eye icon of the allocation master AFTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Then Click the first eye icon in allocation master list view AFTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) Then Click the add button in allocation details AFTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) AFTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) AFTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) AGTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) AGTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) AAD Choose the allocation based value in allocation detail AFTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io.cucumber.java. Scenario) PASSED 1.688 s 4.097 s PASSED 9.858ED 9.858ED 1.524 s | | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.444 s |
| 4 And Click the eye icon of the alloction master AFTER_STEP_stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 5 Then Click the first eye icon in allocation master list view AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 5 Then Click the add button in allocation details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 5 Then Click the add button in allocation details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AA Ad Choose the allocation based value in allocation detail AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AA And Choose the allocation based value in allocation detail PASSED 1.488 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.524 s 1.524 s 1.525 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.956 s | | screenshot | | |
| AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot Then Click the first eye icon in allocation master list view AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot Then Click the add button in allocation details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AAND Choose the allocation based value in allocation detail AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.488 s 1.488 s 1.488 s 1.488 s 1.488 s 1.488 s | | | | |
| screenshot Then Click the first eye icon in allocation master list view AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then Click the add button in allocation details AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 4.255 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot ACTION OF THE CLICK THE ACTION OF THE CLICK | 4 | And Click the eye icon of the alloction master | PASSED | 0.468 s |
| Then Click the first eye icon in allocation master list view AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Then Click the add button in allocation details AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 4.255 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) ARTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 13.669 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.378 s | | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 1.488 s |
| Then Click the first eye icon in allocation master list view AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then Click the add button in allocation details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 4.255 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 7. And Choose the allocation based value in allocation detail PASSED 13.669 s PASSED 0.378 s | | screenshot | | |
| Then Click the first eye icon in allocation master list view AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Then Click the add button in allocation details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 4.255 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.956 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) And Choose the allocation based value in allocation detail AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 13.669 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.378 s | | | | |
| AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then Click the add button in allocation details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot AGTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AND Choose the allocation based value in allocation detail PASSED AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AND Choose the allocation based value in allocation detail PASSED AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) DASSED O.378 s | 5 | | PASSED | 4.097 s |
| screenshot Then Click the add button in allocation details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED O.956 s AGTICAL STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED AGTICAL STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED O.378 s | | | | |
| Then Click the add button in allocation details AFTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io. cucumber. java. Scenario) screenshot And Choose the allocation based value in allocation detail AFTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io. cucumber. java. Scenario) PASSED 13.669 s AFTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io. cucumber. java. Scenario) PASSED 13.67 ARTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io. cucumber. java. Scenario) PASSED 13.689 s | | | | |
| AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot And Choose the allocation based value in allocation detail AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 13.669 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.956 s | | ## 200 100 100 \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ | | |
| screenshot And Choose the allocation based value in allocation detail AFTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io. cucumber. java. Scenario) PASSED 0.378 s | 6 | Then Click the add button in allocation details | PASSED | 4.255 s |
| 7 And Choose the allocation based value in allocation detail AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 13.669 s 0.378 s | | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.956 s |
| And Choose the allocation based value in allocation detail AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 13.669 s 0.378 s | | screenshot | | |
| AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.378 s | | | | |
| | 7 | And Choose the allocation based value in allocation detail | PASSED | 13.669 s |
| | | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.378 s |
| screenshot | | screenshot | | |


| # | Step / Hook Details | Status | Duration |
|----|--|--------|----------|
| | AZENTO OF TOTAL PROPERTY OF T | | |
| 8 | Then Fill the Level No in allocation Details | PASSED | 0.225 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot | PASSED | 0.453 s |
| | ASSETTED U II 1000 000 000 000 000 000 000 000 000 | | |
| 9 | And Choose the order by value in allocation Details | PASSED | 1.054 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.213 s |
| | screenshot | | |
| | A SERVICE | | |
| 10 | Then Click the save button in allocation details | PASSED | 0.227 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.444 s |
| | screenshot | | |
| | ASSENTO U T NO | | |




EXPANDED SECTION -- 8 --

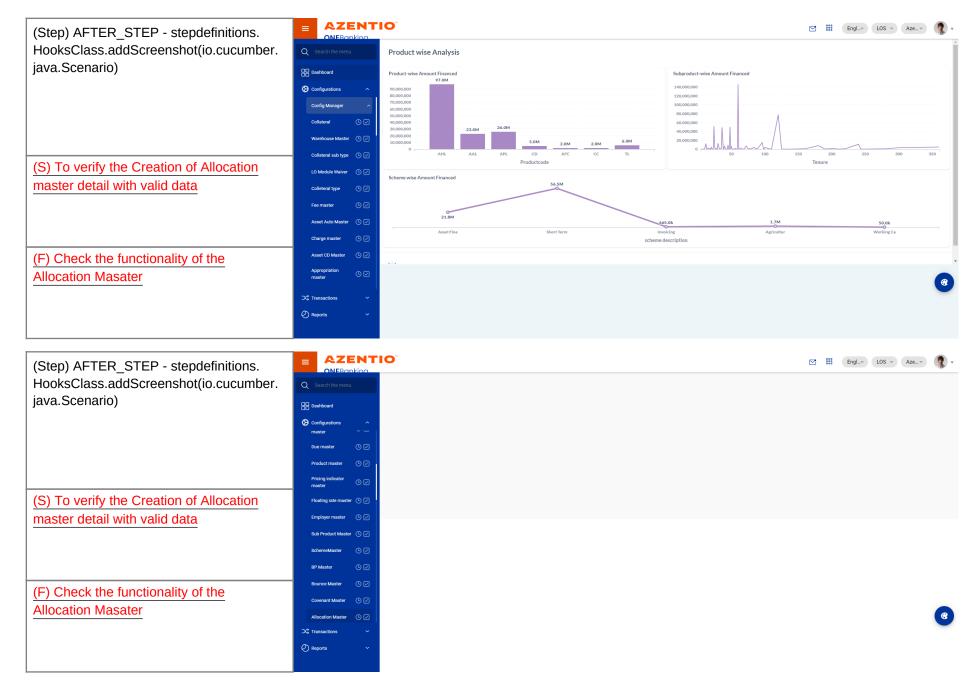

EXPANDED SECTION -- 9 --

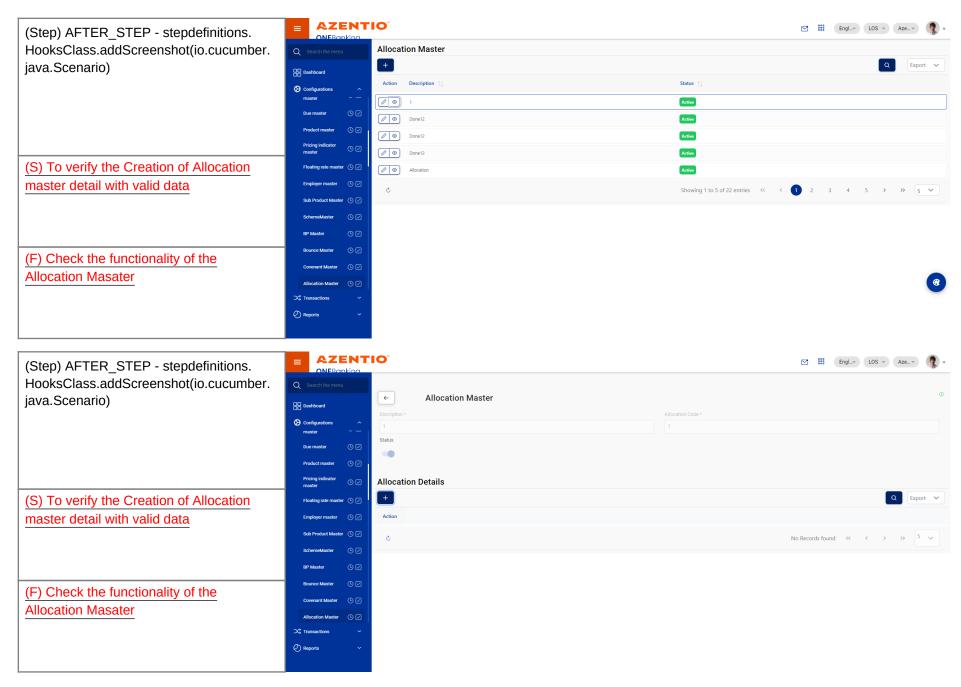

EXPANDED SECTION -- 10 --

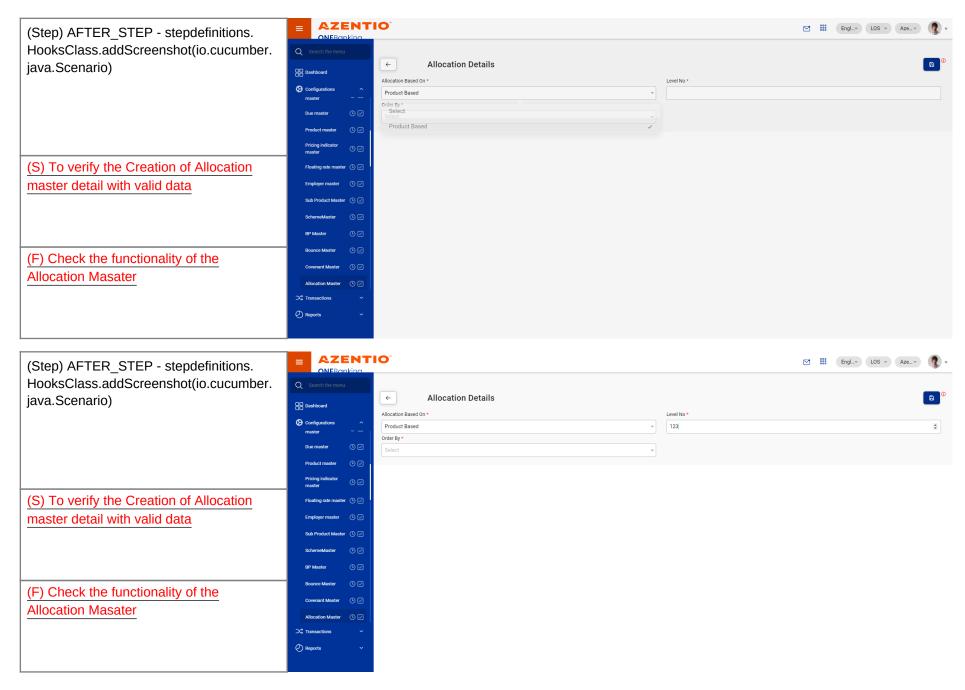

EXPANDED SECTION -- 11 --

