Cucumber Report

| Start : Jul 25, 1:51:25.027 PM	End : Jul 25, 1:52:36.743 PM	Duration : 1 m 11.716 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 5 FAILED - 1 SKIPPED - 1

#	Feature Name	T	P	F	S	Duration
1	Check the functionality of product master	1	0	1	0	1 m 11.716 s
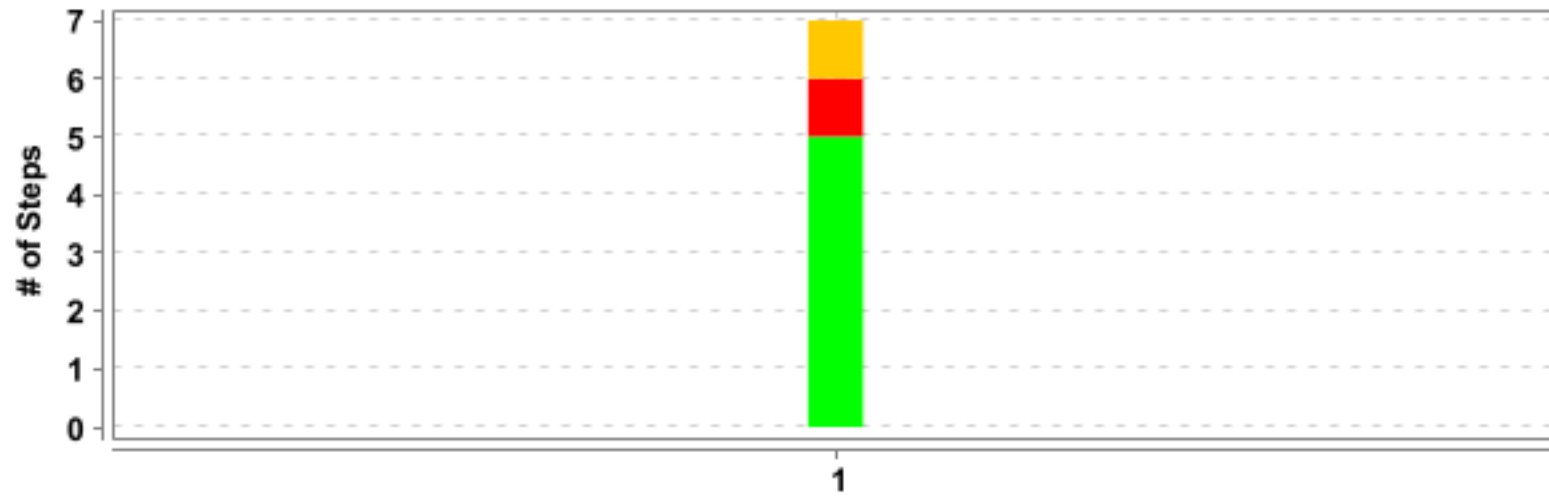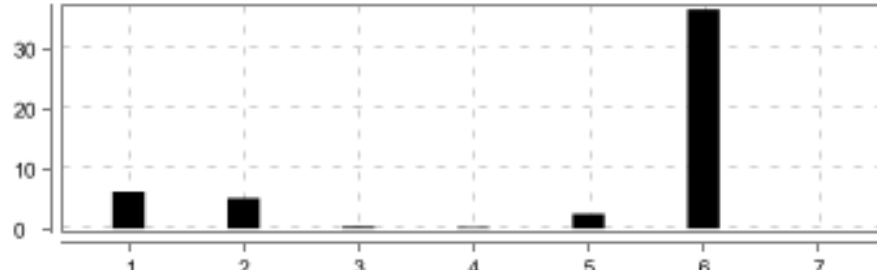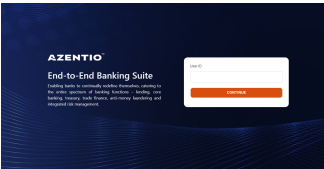
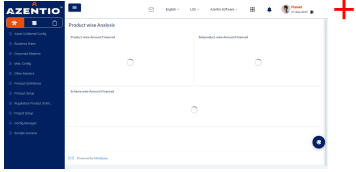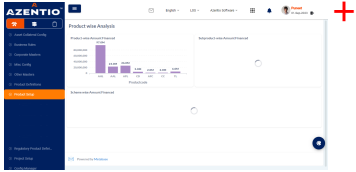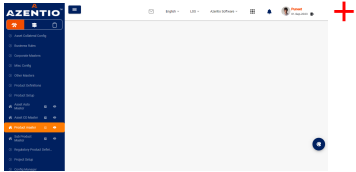| #	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the functionality of product master	Product Master - While modification, user verify proper validation message for blank field	7	5	1	1	1 m 11.709 s
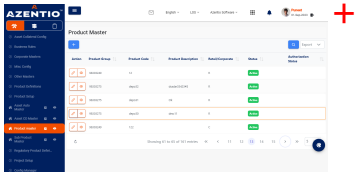
(F)- Check the functionality of product master

FAILED	DURATION - 1 m 11.716 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0	1	Steps Total - 7 Pass - 5 Fail - 1 Skip - 1	7
/ 1:51:25.027 PM // 1:52:36.743 PM /					

(S)- Product Master - While modification, user verify proper validation message for blank field

FAILED	DURATION - 1 m 11.709 s		Steps Total - 7 Pass - 5 Fail - 1 Skip - 1
/ 1:51:25.034 PM // 1:52:36.743 PM /			7
Check the functionality of product master			
@M6			

#	Step / Hook Details	Status	Duration
1	Given User launch the kuls application	PASSED	6.124 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.453 s
	screenshot		
	+		
2	And User Login as maker	PASSED	5.023 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.183 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	Then user should navigate to product master	PASSED	0.343 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.665 s
	screenshot		
4	And click on edit view of product master	PASSED	0.208 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.313 s
	screenshot		
5	Then click on edit button of record to modify	PASSED	2.469 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.230 s
	screenshot		
6	Then verify proper validation message for blank field should display	FAILED	36.440 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=100.0.4896.127) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [b1b2e262cf8b541583bef8c147c6f415, findElement {using=xpath, value=//ion-row[1]/ion-col[2]/div[1]/span[1]/div[1]/digital-form-error[1]/ion-badge[1]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.127, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir:		

#	Step / Hook Details	Status	Duration

	C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:61756}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:61756/devtoo..., se:cdpVersion: 100.0.4896.127, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: b1b2e262cf8b541583bef8c147c6f415
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	   at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	   at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	   at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381)
	   at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373)
	   at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70)
	   at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39)
	   at jdk.proxy2/jdk.proxy2.$Proxy45.toString(Unknown Source)
	   at java.base/java.lang.String.valueOf(String.java:4215)
	   at java.base/java.lang.StringBuilder.append(StringBuilder.java:169)
	   at org.openqa.selenium.support.ui.ExpectedConditions$10.toString(ExpectedConditions.java:298)
	   at java.base/java.lang.String.valueOf(String.java:4215)
	   at java.base/java.lang.StringBuilder.append(StringBuilder.java:169)
	   at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:229)
	   at helper.WaitHelper.waitForElementwithFluentwait(WaitHelper.java:93)
	   at stepdefinitions.ProductMaster_Retail.verify_proper_validation_message_for_blank_field_should_display(ProductMaster_Retail.java:370)
	   at ?.verify proper validation message for blank field should display(file:///C:/Users/inindc00091/git/Devesh_AzentioULS_FW/ AzentioULSFrameworkCopy/src/test/java/features/ProductMaster_Retail.feature:71)
	* Not displayable characters are replaced by '?'.		

	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	FAILED	12.186 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=100.0.4896.127) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [b1b2e262cf8b541583bef8c147c6f415, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.127, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:61756}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:61756/devtoo..., se:cdpVersion: 100.0.4896.127, setWindowRect: true, strictFileInteractability: false, timeouts:		

#	Step / Hook Details	Status	Duration

	{implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: b1b2e262cf8b541583bef8c147c6f415
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)
	   at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347)
	   at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		

7	Then verify system should not allow to enter invalid datatypes while modification	SKIPPED	0.001 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.271 s

	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=100.0.4896.127) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [b1b2e262cf8b541583bef8c147c6f415, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.127, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:61756}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:61756/devtoo..., se:cdpVersion: 100.0.4896.127, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: b1b2e262cf8b541583bef8c147c6f415
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)		

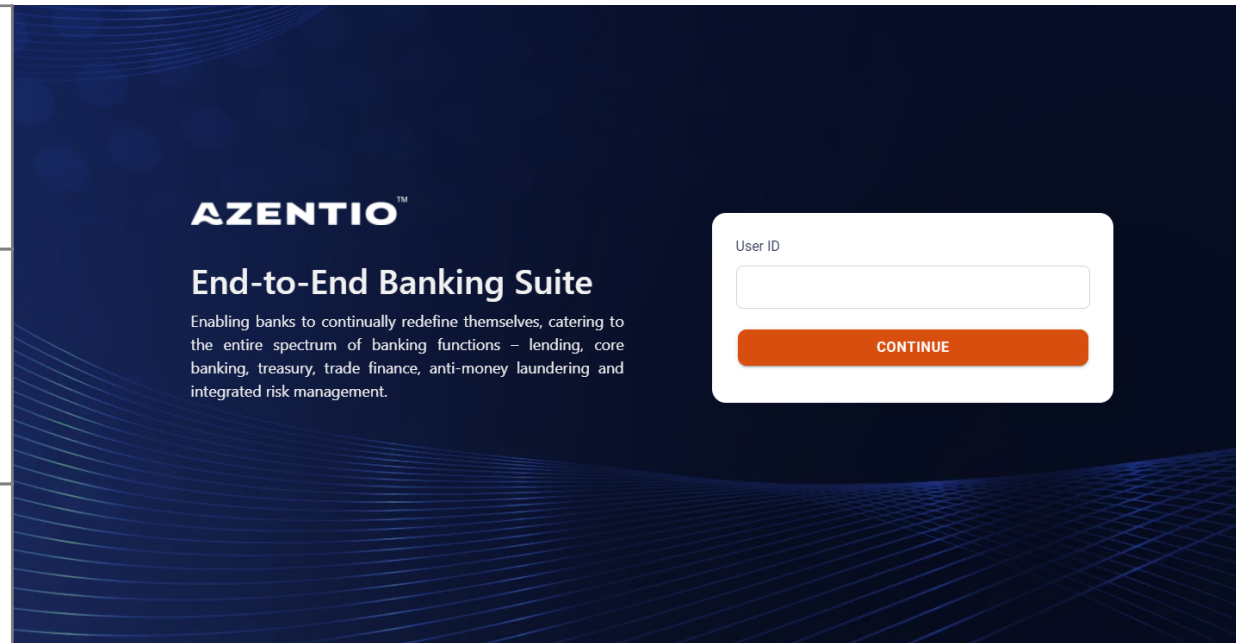| #	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432) at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Product Master - While modification, user verify proper validation message for blank field	
(F) Check the functionality of product master	

AZENTIO™

End-to-End Banking Suite

Enabling banks to continually redefine themselves, catering to the entire spectrum of banking functions – lending, core banking, treasury, trade finance, anti-money laundering and integrated risk management.

User ID

CONTINUE

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)	
(S) Product Master - While modification, user verify proper validation message for blank field	
(F) Check the functionality of product master	

AZENTIO™

English ▾   LOS ▾   Azentio Software ▾   Puneet 01-Sep-2023

- ⊙ Asset Collateral Config
- ⊙ Business Rules
- ⊙ Corporate Masters
- ⊙ Misc Config
- ⊙ Other Masters
- ⊙ Product Definitions
- ⊙ Product Setup
- ⊙ Regulatory Product Defini...
- ⊙ Project Setup
- ⊙ Config Manager
- ⊙ Sample Screens

Product wise Analysis

Product-wise Amount Financed

Subproduct-wise Amount Financed

Scheme wise Amount Financed

Powered by Metabase

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

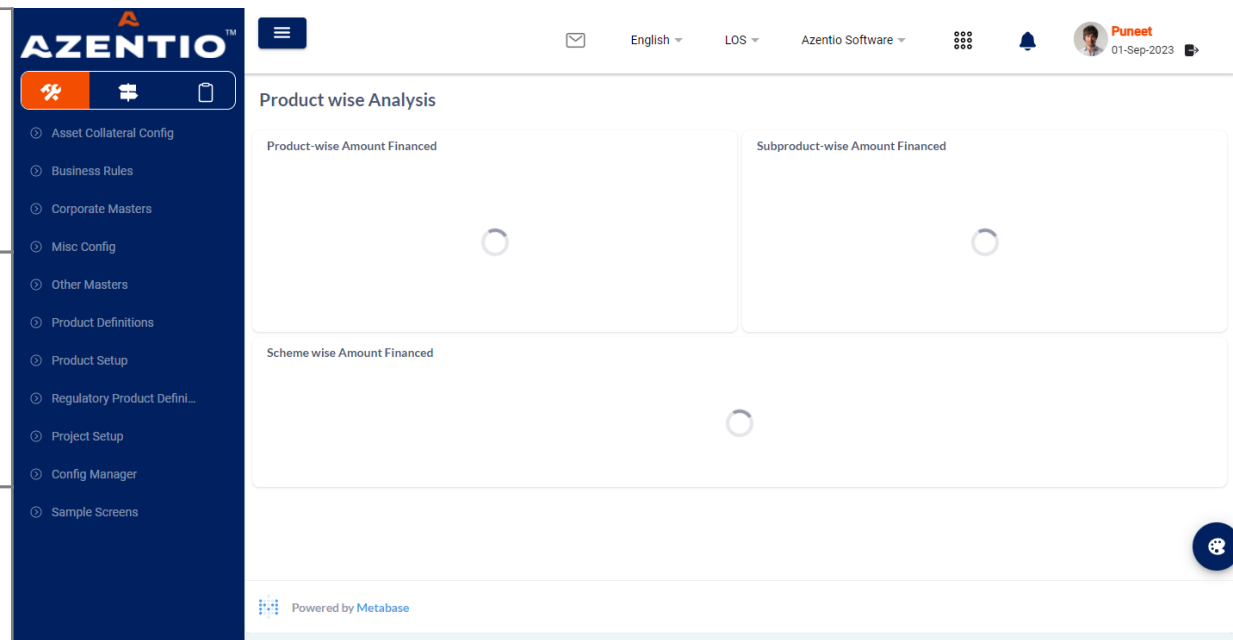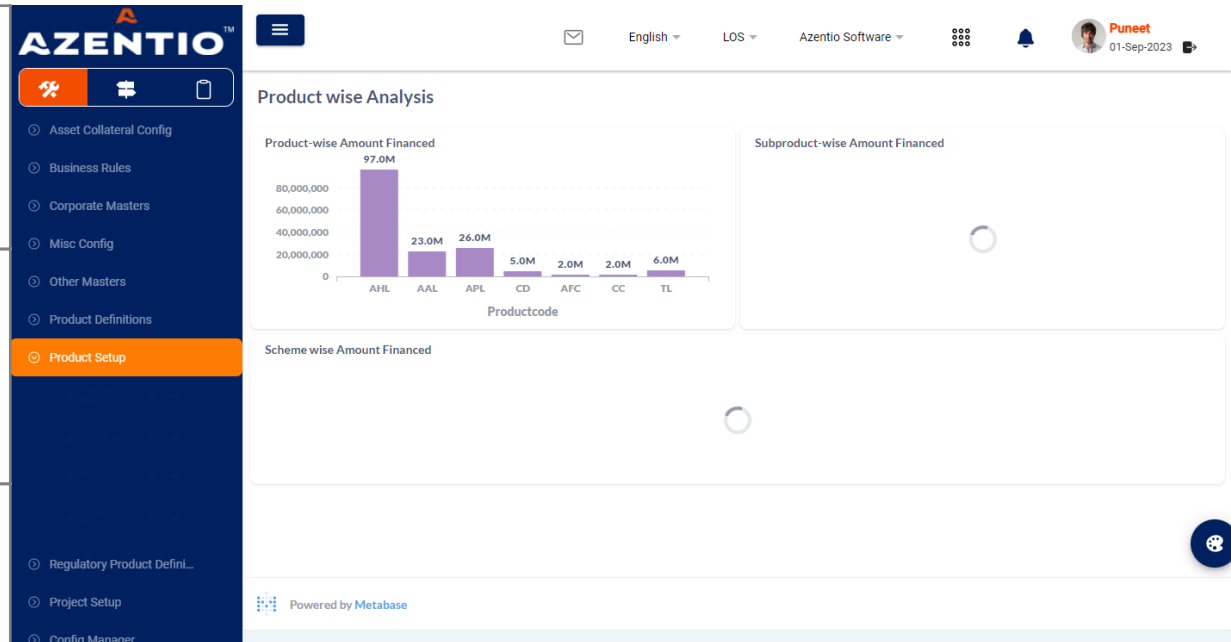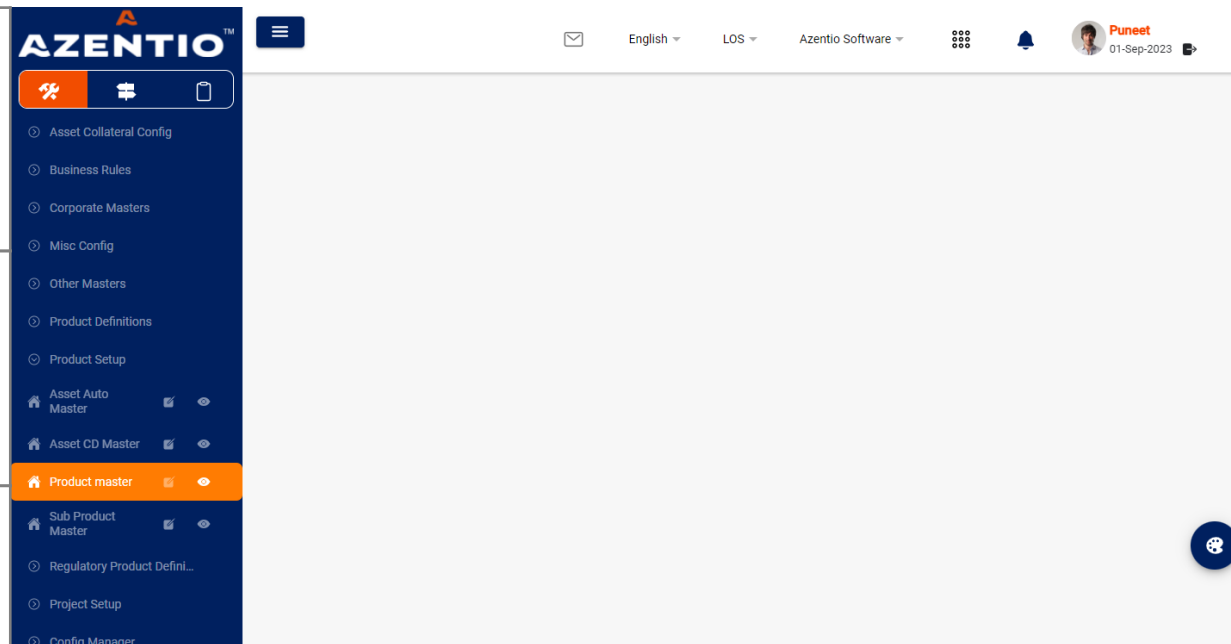(S) Product Master - While modification, user verify proper validation message for blank field

(F) Check the functionality of product master

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Product Master - While modification, user verify proper validation message for blank field

(F) Check the functionality of product master

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) Product Master - While modification,
user verify proper validation message for
blank field

(F) Check the functionality of product
master