


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	collateral Functionality	1	0	1	0	1 m 9.549 s

SCENARIOS SUMMARY -- 3 --

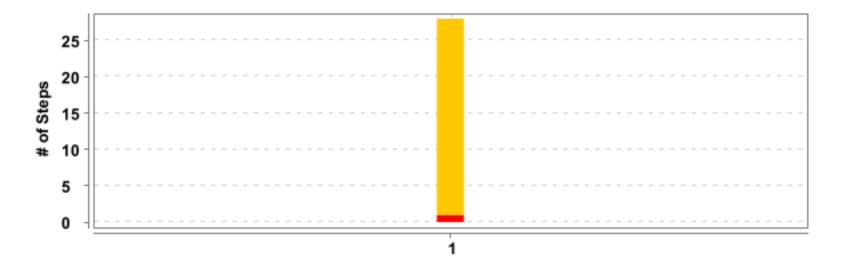


#	Feature Name	Scenario Name	T	P	F	S	Duration
2	collateral Functionality	Asset collateral category - List View WIP Records	28	0	1	27	1 m 9.545 s

DETAILED SECTION -- 4 --

(F)- collateral Functionality

FAILED	DURATION - 1 m 9.549 s	Scenarios		Steps	
		Total - 1		Total - 28	
/ 10:46:24.753 A	M // 10:47:34.302 AM /	Pass - 0	1	Pass - 0	28
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 27	

(S)- Asset collateral category - List View WIP Records

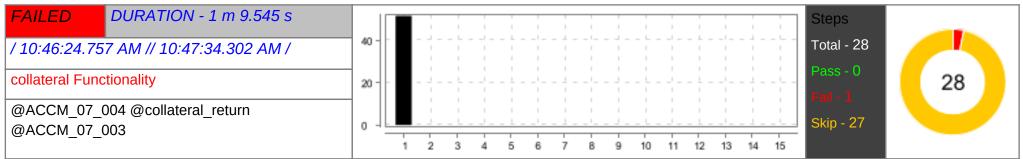

#	Step / Hook Details	Status	Duration
1	Given User launch the kuls application	FAILED	51.603 s
	org.openqa.selenium.WebDriverException: unknown error: cannot determine loading status from disconnected: received Inspector.detached event (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [6bef1b7eecbc3bddaafbf42192ca28e3, get {url=http://10.1.56.122:8680/cob-qc}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 98.0.4758.80 (7f048e88ab0d8, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:50477}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:50477/devtoo, se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true) Session ID: 6bef1b7eecbc3bddaafbf42192ca28e3 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:326) at stepdefinitions.KULS_Login.user_launch_the_kuls_application(KULS_Login.java:29) at ?.User launch the kuls application(file:///C:/Users/inindc00089/git/repository6/Priyanka_AzentioULSFramework/src/test/java/features/ Collateral.feature:28) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	FAILED	12.571 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bef1b7eecbc3bddaafbf42192ca28e3, screenshot {}] Capabilities (acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: (chromedriverVersion: 98.0.4758.80 (770488e8ba0d8, userDataDir: C1Users\()INDC~11AppData\()L\), goog:chromeOptions: {debuggerAddress: localhost:50477, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws:/localhost:50477/fdevtoo, se:cdpVersion: 99.0.4844.82, set\()WindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 6bef1b7eecbc3bddaafbf42192ca28e3 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdva.lang.reflect.Onstructor.or.evinstanceWithCaller(Constructor.java:499) at java.base/jdva.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.evice.DriverCommandExecutor.evecute(PriverCommandExecutor.java:144) at org.openqa.selenium.remote.service.DriverCommandExecutor.evecute(PriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.evecute(RemoteWebDriver.java:606) at		
2	And User Login as maker	SKIPPED	0.001 s
3	Then click on Asset collateral config	SKIPPED	0.000 s
4	Then click on collateral Edit icon	SKIPPED	0.001 s
5	Then open collateral wip record for return	SKIPPED	0.000 s
6	Then click on collateral save button	SKIPPED	0.000 s
7	Then validate Success pop up	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
8	Then click on inbox	SKIPPED	0.000 s
9	Then click on search icon of record list	SKIPPED	0.000 s
10	Then search collateral record	SKIPPED	0.000 s
11	And maker user open the record from inbox	SKIPPED	0.000 s
12	Then maker user submit the Record	SKIPPED	0.000 s
13	Then user logout from the application	SKIPPED	0.000 s
14	And User Login as Checker	SKIPPED	0.000 s
15	Then click on inbox	SKIPPED	0.000 s
16	Then click on search icon of record list	SKIPPED	0.001 s
17	Then search collateral record	SKIPPED	0.000 s
18	Then checker user open the record from inbox	SKIPPED	0.000 s
19	Then validate Txn status is completed	SKIPPED	0.000 s
20	Then close the collateral view summary	SKIPPED	0.000 s
21	Then checker user return the record	SKIPPED	0.001 s
22	Then user logout from the application	SKIPPED	0.000 s
23	And User Login as maker	SKIPPED	0.001 s
24	Then click on Asset collateral config	SKIPPED	0.000 s
25	Then click on collateral Edit icon	SKIPPED	0.000 s
26	Then search and validate the approved record	SKIPPED	0.001 s
27	Then open collateral wip record for return	SKIPPED	0.000 s
28	Then user logout from the application	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.239 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bef1b7eecbc3bddaafbf42192ca28e3, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 98.0.4758.80 (7f0488e8ba0d8, userDataDir: C:\Users\ININDC~1\AppDataL}, goog:chromeOptions: {debuggerAddress: localhost:50477}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:50477/devtoo, se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:virtualAuthenticators: true} Session ID: 6bef1b7eecbc3bddaafbf42192ca28e3 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance((Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:133)		

DETAILED SECTION -- 7 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606)		
	at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432)		
	at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		