Cucumber Report

Start : Oct 14, 3:17:06.246 pm	*End : Oct 14, 3:17:47.728 pm*	**Duration : 41.482 s**
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 9 FAILED - 1 SKIPPED - 5
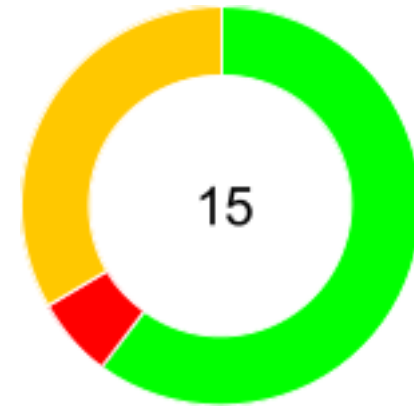
#	Feature Name	T	P	F	S	Duration
1	Check the functionality of the Allocation Masater	1	0	1	0	41.482 s
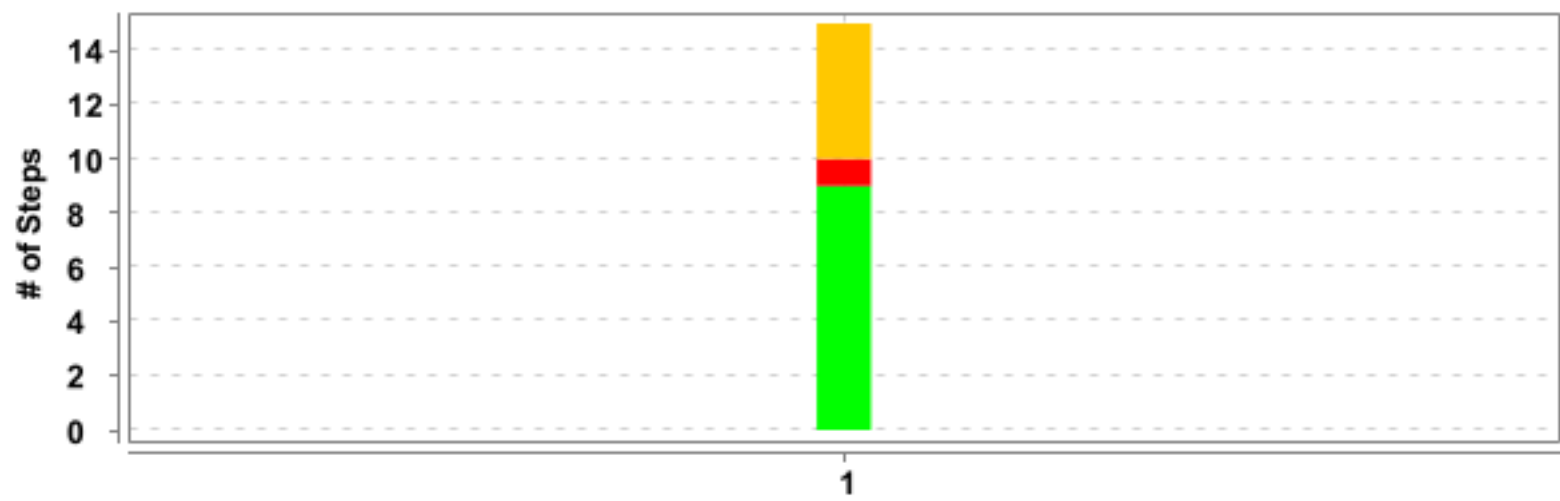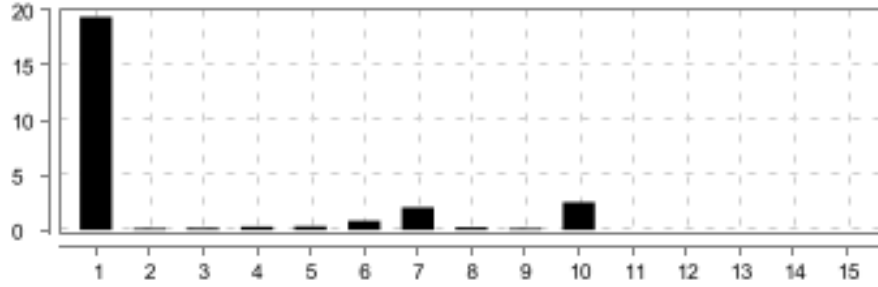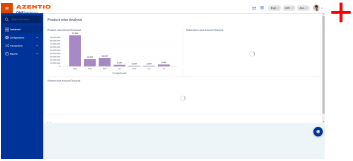
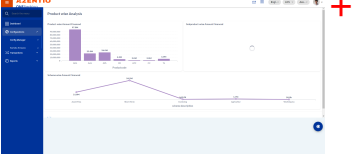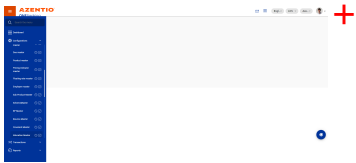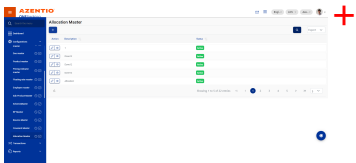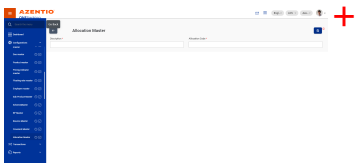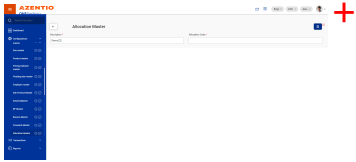| #	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the functionality of the Allocation Masater	To Create the allocation master with valid details	15	9	1	5	41.474 s

(F)- Check the functionality of the Allocation Masater
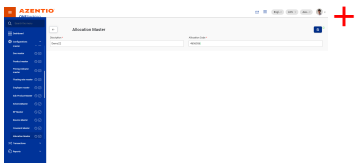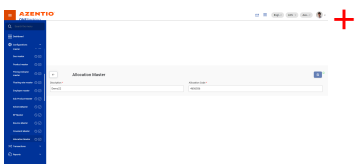
FAILED	DURATION - 41.482 s	Scenarios		Steps	
/ 3:17:06.246 pm // 3:17:47.728 pm /		Total - 1 Pass - 0 Fail - 1 Skip - 0	1	Total - 15 Pass - 9 Fail - 1 Skip - 5	15
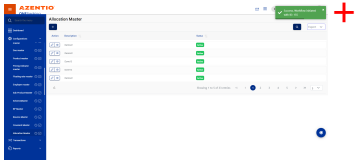
(S)- To Create the allocation master with valid details

FAILED	DURATION - 41.474 s		Steps	
/ 3:17:06.254 pm // 3:17:47.728 pm /			Total - 15	
Check the functionality of the Allocation Masater			Pass - 9 Fail - 1	15
@Allocation_Master_M1			Skip - 5	

#	Step / Hook Details	Status	Duration
1	Given User Launch the KULS application	PASSED	19.373 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.730 s
2	Then user click on configurations Tab	PASSED	0.164 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.416 s

#	Step / Hook Details	Status	Duration
3	When user click Config Manager menu	PASSED	0.185 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.416 s
4	And Click the eye icon of the alloction master	PASSED	0.286 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	1.301 s
5	Then Click the add button in the allocation master	PASSED	0.324 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.385 s
6	And Validate the allocation master screen open with all fields	PASSED	0.824 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 	PASSED	0.202 s
7	Then Enter the description fields in the allocation master	PASSED	2.056 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot	PASSED	0.390 s

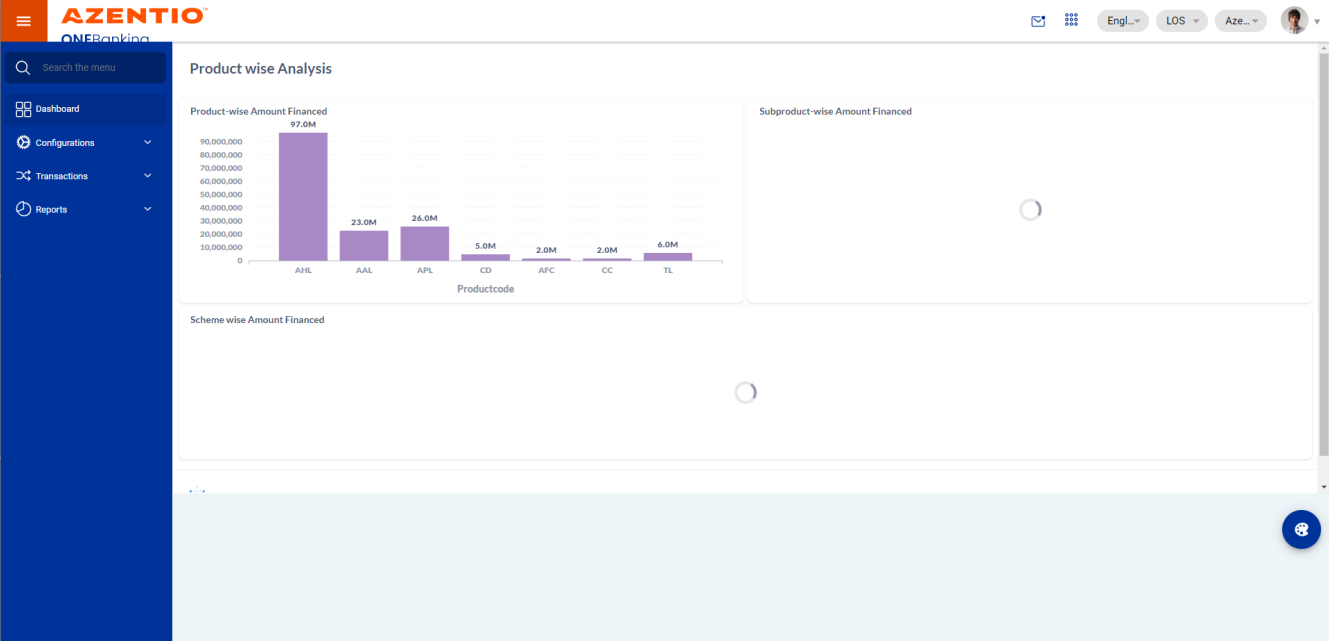| #	Step / Hook Details	Status	Duration
8	And Enter the allocation code value in the allocation master	PASSED	0.229 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.267 s
	screenshot		
9	Then Save the record in allocation master	PASSED	0.164 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.394 s
	screenshot		
10	And Validate the sucess popup	FAILED	2.529 s
	java.lang.AssertionError: expected [Success, Workflow initiated with ID: 155] but found [Success] at org.testng.Assert.fail(Assert.java:99) at org.testng.Assert.failNotEquals(Assert.java:1037) at org.testng.Assert.assertEqualsImpl(Assert.java:140) at org.testng.Assert.assertEquals(Assert.java:122) at org.testng.Assert.assertEquals(Assert.java:629) at org.testng.Assert.assertEquals(Assert.java:639) at stepdefinitions.AllocationMaster.validate_the_sucess_popup(AllocationMaster.java:96) at ?.Validate the sucess popup(file:///C:/Users/inindc00075/git/Arshath_ULS/Arshath_AzentioULSFramework/src/test/java/features/MDM_Allocation_Mst.feature:14) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.410 s
	screenshot		

#	Step / Hook Details	Status	Duration
11	Then Click the inbox in allocation master	SKIPPED	0.000 s
12	And Search the record in allocation master	SKIPPED	0.000 s
13	Then Get the reference id and store it in json in allocation master	SKIPPED	0.000 s
14	And Click the action icon of respective allocation master	SKIPPED	0.001 s
15	Then Submit the record in allocation master	SKIPPED	0.000 s

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

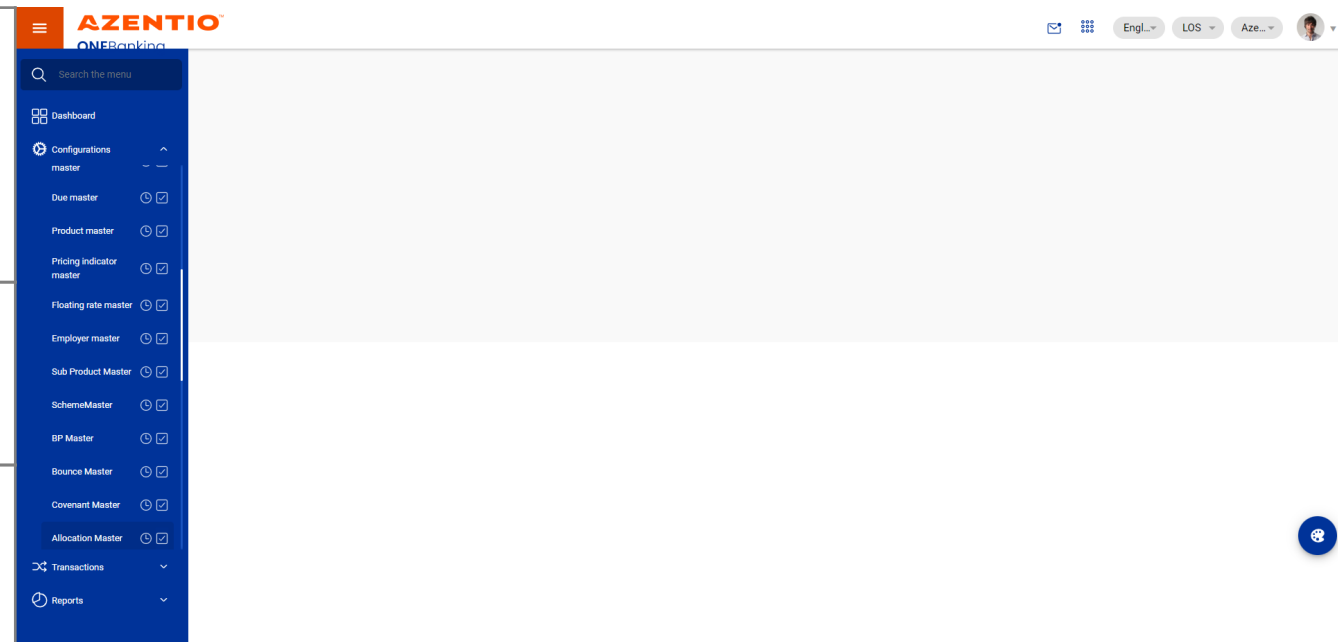(S) To Create the allocation master with valid details

(F) Check the functionality of the Allocation Masater

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To Create the allocation master with valid details

(F) Check the functionality of the Allocation Masater

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To Create the allocation master with valid details

(F) Check the functionality of the Allocation Masater

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To Create the allocation master with valid details

(F) Check the functionality of the Allocation Masater

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To Create the allocation master with valid details

(F) Check the functionality of the Allocation Masater

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To Create the allocation master with valid details

(F) Check the functionality of the Allocation Masater

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) To Create the allocation master with valid details

(F) Check the functionality of the Allocation Masater

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) To Create the allocation master with valid details

(F) Check the functionality of the Allocation Masater
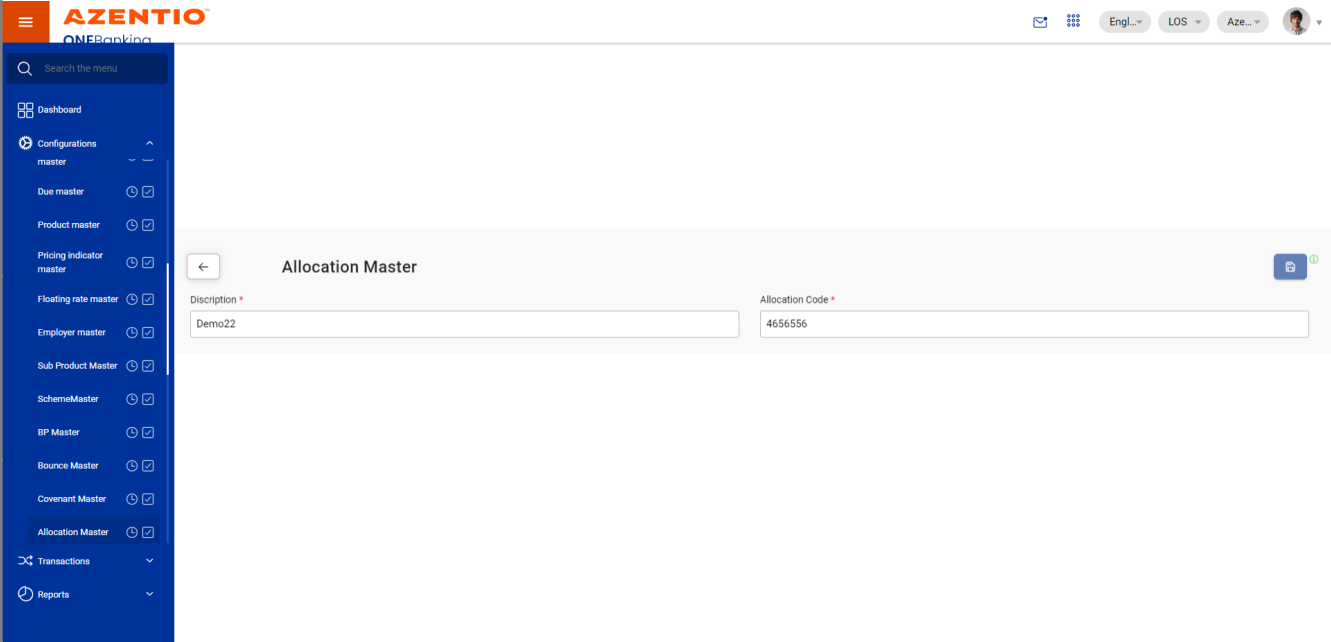
(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To Create the allocation master with valid details

(F) Check the functionality of the Allocation Masater

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) To Create the allocation master with valid details

(F) Check the functionality of the Allocation Masater