



FEATURES SUMMARY -- 2 --

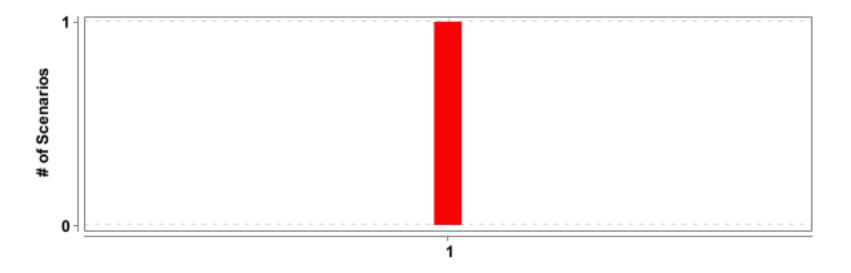

#	Feature Name	T	P	F	S	Duration
1	Check the functionality of Customer Address Details screen	1	0	1	0	26.026 s

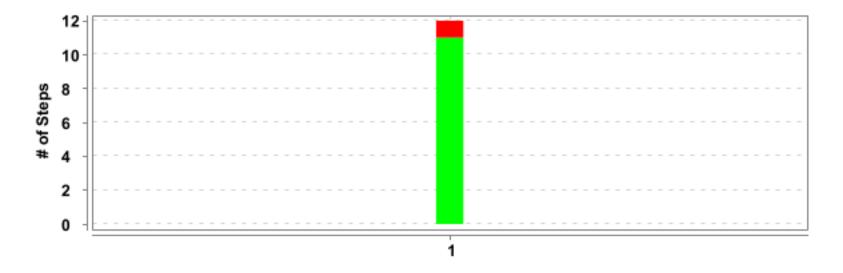

#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the functionality of Customer	Verify the buttons are available on screen while modify the	12	11	1	0	26.020 s
	Address Details screen	Customer Address Information					

DETAILED SECTION

(F)- Check the functionality of Customer Address Details screen

FAILED	DURATION - 26.026 s	Scenarios		Steps	
		Total - 1		Total - 12	
/ 2:02:14.349	PM // 2:02:40.375 PM /	Pass - 0	1	Pass - 11	12
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 0	

(S)- Verify the buttons are available on screen while modify the Customer Address Information

FAILED DURATION - 26.020 s		1 - 1 - 1 - 1 - 1 - 1 - 1	Steps
/ 2:02:14.355 PM // 2:02:40.375 PM /			Total - 12
Check the functionality of Customer Address			Pass - 11 12
Details screen	4		Fail - 1 Skip - 0
@AT_CAD_005	1 2 3 4	5 6 7 8 9 10 11 12	3 Skip - 0

#	Step / Hook Details	Status	Duration
1	Given User launch the kuls application	PASSED	6.451 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.414 s
	screenshot		
	AZENTIO IMI		
2	And User Login as maker	PASSED	3.587 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.227 s
	screenshot		
	AZENTO II O P B ONO ONO ON O P O P D ONO ONO ONO O		

AFTER_STEP - stepdefinitions HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions HooksClass.addScreenshot(io.cucumber.java.Scenario) FASSED O.204 s AFTER_STEP - stepdefinitions HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED O.229 s AFTER_STEP - stepdefinitions HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED O.208 s	#	Step / Hook Details	Status	Duration
screenshot 4 Then click on inbox to search for the Customer Address Details record AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) 5 Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) Screenshot 4 Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 0.200 s PASSED 0.212 s 0.212 s 0.213 s 0.214 s 0.215 s 0.215 s 0.215 s 0.215 s 0.216 s 0.217 s 0.217 s 0.218 s 0.218 s 0.229 s 0.229 s 0.229 s 0.229 s 0.229 s 0.229 s	3	Then user should click on the menu toggle	PASSED	0.751 s
Then click on inbox to search for the Customer Address Details record AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.372 s
4 Then click on inbox to search for the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.200 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 7 Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.208 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then enter the reference id of the Customer Address Details record AFTER_STEP_stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.200 s PASSED 0.212 s 0.212 s 0.084 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.084 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s		AZENTO DE CONTROL DE		
screenshot Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.212 s 0.212 s 0.084 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.175 s Then click on the entitle button of the Customer Address Details record of that reference id PASSED 0.229 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.208 s	4	Then click on inbox to search for the Customer Address Details record	PASSED	0.204 s
5 Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 6 Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 7 Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.200 s PASSED 0.212 s 0.212 s 0.213 s 0.214 s 0.215 s 0.215 s 0.215 s 0.215 s 0.216 s 0.217 s 0.217 s 0.218 s 0.229 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.208 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.355 s
Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.200 s 0.212 s 0.212 s 0.212 s 0.212 s 0.213 s 0.214 s 0.215 s 0.215 s 0.215 s 0.216 s 0.217 s 0.217 s 0.218 s 0.219 s 0.229 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s 0.208 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.212 s 0.212 s 0.212 s		One		
Screenshot Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s	5	Then click on search button to search the record of Customer Address Details	PASSED	0.200 s
Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.212 s
Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.084 s 0.175 s 0.175 s		screenshot	1	
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 7 Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.175 s 0.229 s PASSED 0.229 s PASSED 0.208 s				
7 Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s 0.208 s	6	Then enter the reference id of the Customer Address Details record	PASSED	0.084 s
7 Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.229 s 0.208 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.175 s
7 Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions. Hooks Class. add Screenshot (io. cucumber.java. Scenario) PASSED 0.229 s 0.208 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.208 s				
	7	Then click on the entitle button of the Customer Address Details record of that reference id	PASSED	0.229 s
screenshot		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.208 s
		screenshot	7	

#	Step / Hook Details	Status	Duration
	SOURCE OF SOURCE OF SOURCE SAME SAME SAME SAME SAME SAME SAME SAM		
8	Then click on the Additional customer info tab in Customer Personal Information screen	PASSED	1.432 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.599 s
	screenshot		
	Control Contro		
9	Then select the Customer Address details record from the customer personal detail screen	PASSED	0.383 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.891 s
	screenshot		
	Address Desails		
10	Then select the record of Address details from the customer identification screen	PASSED	1.254 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.471 s
	screenshot		
	ASSENTO OF SET		
11	Then verify Customer Address details screen should get open with mentioned Fields	PASSED	1.280 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.162 s
	screenshot		
	### ACCUPATION OF THE PROPERTY		

DETAILED SECTION -- 7 --


#	Step / Hook Details	Status	Duration
	Then verify the functionality of Back button of customer address details screen	FAILED	1.151 s
	org.openqa.selenium.ElementClickInterceptedException: element click intercepted: Element is not clickable at point (289, 59). Other element would receive the click: <input aria-labelledby="ion-input-5-lbl" autocapitalize="off" autocomplete="off" autocorrect="off" class="native-input sc-ion-input-ios" name="ion-input-5" placeholder="" spellcheck="false" type="text"/> (Session info: chrome=100.0.4896.60) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome. ChromeDriver Command: [84dc93eb7a5d033da61f2691ea7389ed, clickElement {id=e19a0f9f-e08d-4d39-84c0-6dbcc10277ca}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.60, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:52034}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:52034/devtoo, se:cdpVersion: 100.0.4896.60, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:virtualAuthenticators: true} Element: [[ChromeDriver: chrome on WINDOWS (84dc93eb7a5d033da61f2691ea7389ed)] -> xpath: //button[@ng-reflect-text='Go Back']/span[1]] Session ID: 84dc93eb7a5d033da61f2691ea7389ed		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547)		
	at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:251)		
	at org.openqa.selenium.remote.RemoteWebElement.click(RemoteWebElement.java:77)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:568)		
	at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:52)		
	at jdk.proxy2/jdk.proxy2.\$Proxy45.click(Unknown Source)		
	at stepdefinitions.CustomerAddressDetails.		
	verify_the_functionality_of_back_button_of_customer_address_details_screen(CustomerAddressDetails.java:335)		
	at ?.verify the functionality of Back button of customer address details screen(file:///C:/Users/inindc00091/git/Devesh_AzentioULS_FW/		
	AzentioULSFrameworkCopy/src/test/java/features/CustomerAddressDetails.feature:54)		
	* Not displayable characters are replaced by '?'.		
	AFTER STEP - stepdefinitions. Hooks Class. add Screenshot (io. cucumber. java. Scenario)	PASSED	0.115 s


#			Status	Duration	
	ACRESTIC Continue	TO DE TO			
	Monthly	•			

-- 9 --


(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario) User ID (S) Verify the buttons are available on **AZENTIO** screen while modify the Customer **Address Information** CONTINUE (F) Check the functionality of Customer Address Details screen **AZENTIO**° (Step) AFTER_STEP - stepdefinitions. **ONE**Banking HooksClass.addScreenshot(io.cucumber. java.Scenario) Q 88 Ø (S) Verify the buttons are available on screen while modify the Customer 0 **Address Information** (F) Check the functionality of Customer Address Details screen

EXPANDED SECTION -- 10 --

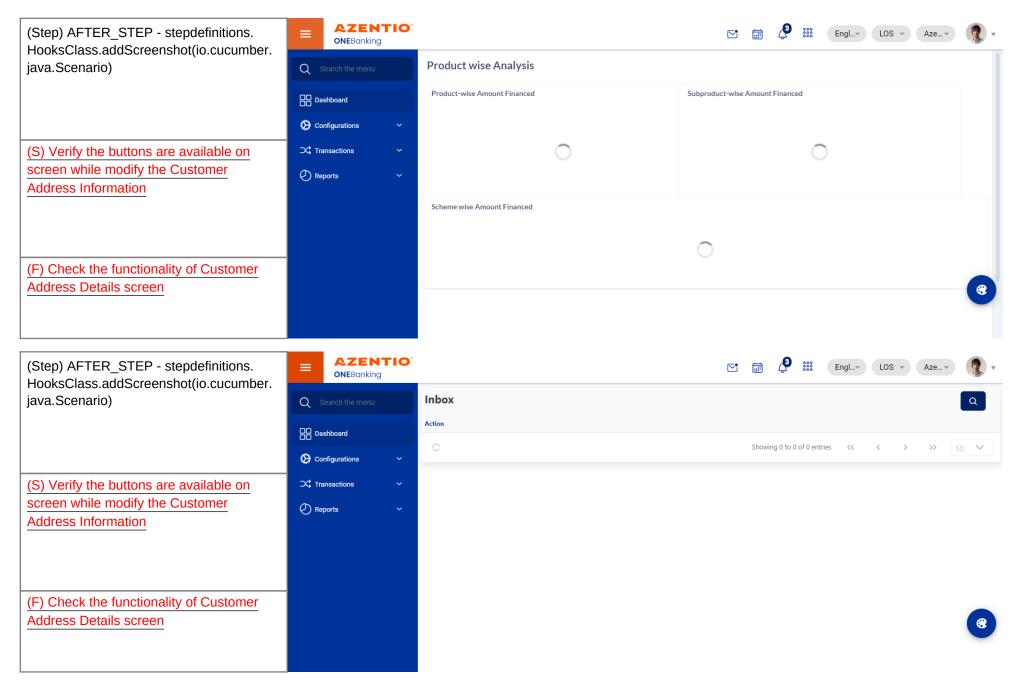


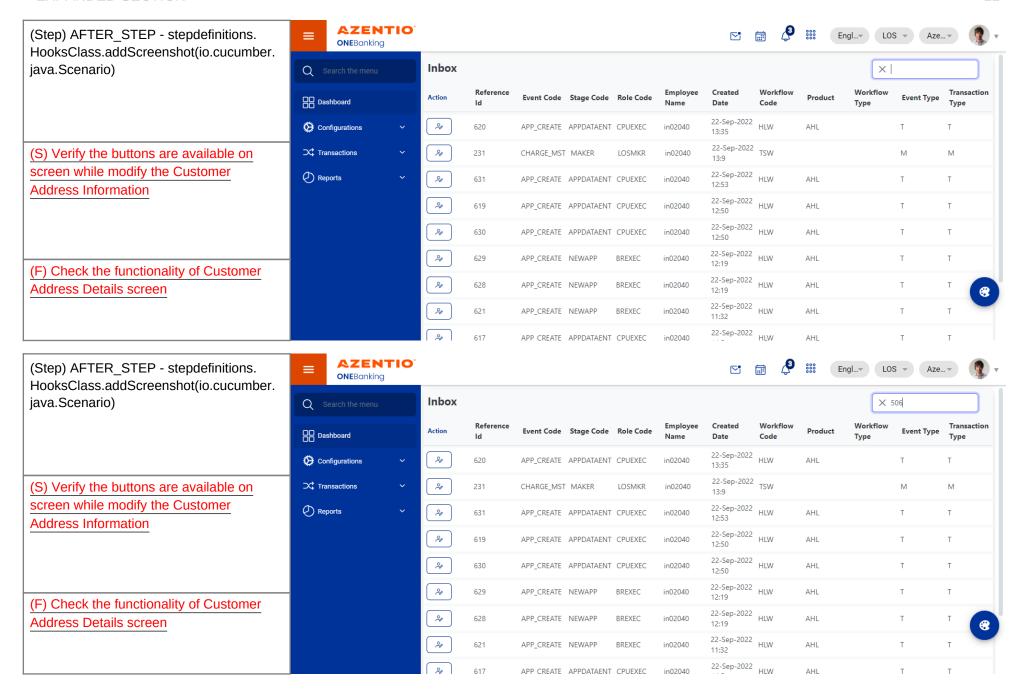

EXPANDED SECTION --- 12 --

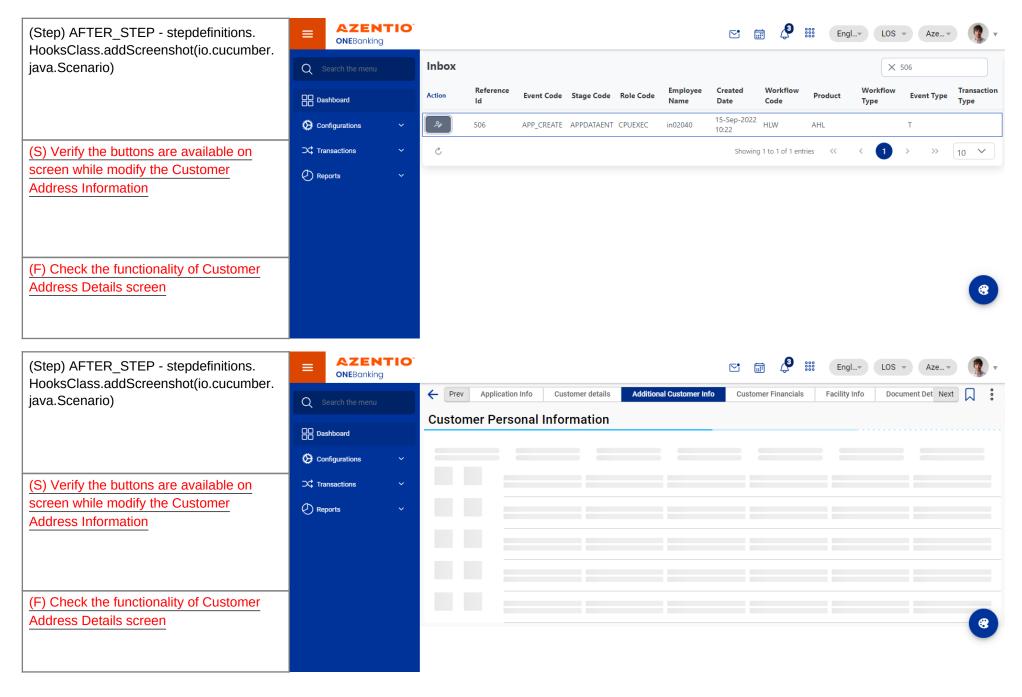

EXPANDED SECTION -- 13 --

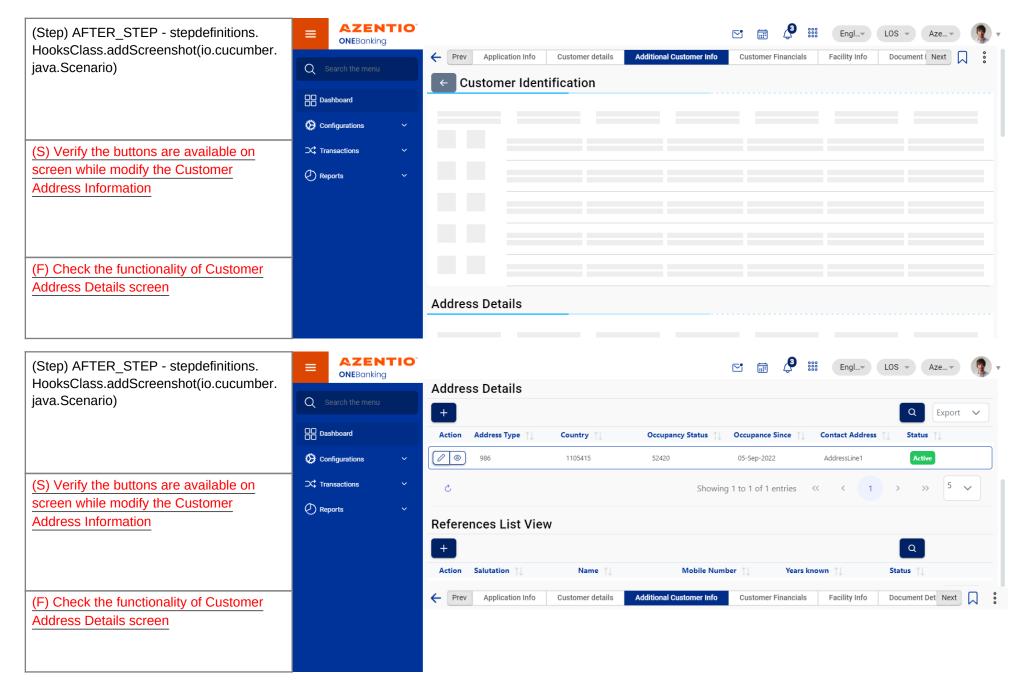

EXPANDED SECTION -- 14 --

