


FEATURES SUMMARY -- 2 --



| # | Feature Name | T | P | F | S | Duration |
|---|---|---|---|---|---|-------------|
| 1 | Check the functionality of Living Expenses Master | 1 | 0 | 1 | 0 | 3 m 5.592 s |

SCENARIOS SUMMARY

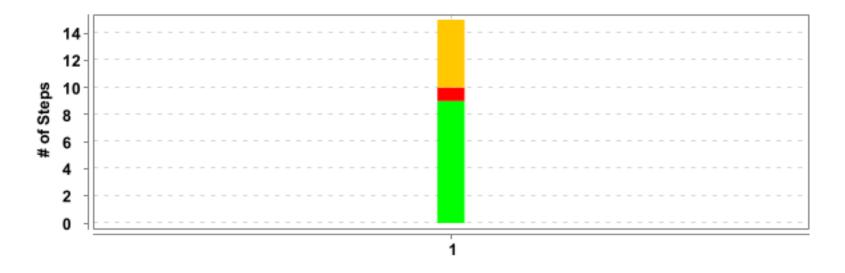


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|-----------------------------------|--|----|---|---|---|-------------|
| 1 | Check the functionality of Living | Modification of Living Expense Location record | 15 | 9 | 1 | 5 | 3 m 5.585 s |
| | Expenses Master | | | | | | |

DETAILED SECTION -- 4 --

(F)- Check the functionality of Living Expenses Master

| FAILED | DURATION - 3 m 5.592 s | Scenarios | | Steps | |
|------------------|------------------------|-----------|---|------------|----|
| | | Total - 1 | | Total - 15 | |
| / 4:35:46.878 pm | n // 4:38:52.470 pm / | Pass - 0 | 1 | Pass - 9 | 15 |
| | | Fail - 1 | | Fail - 1 | |
| | | Skip - 0 | | Skip - 5 | |

(S)- Modification of Living Expense Location record

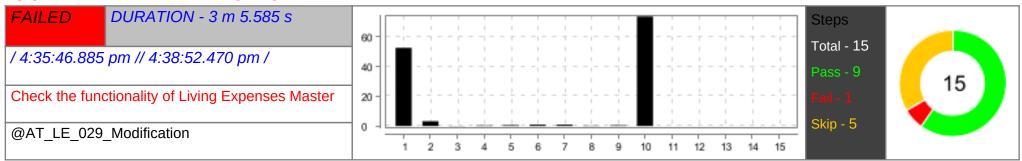

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given user log in as uls application maker | PASSED | 52.539 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 3.001 s |
| | screenshot | | |
| | ASSETTO TO SET TO THE PARTY OF | | |
| 2 | Then user change Application Type as Los | PASSED | 3.219 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 2.275 s |
| | screenshot | | |
| | ASSETTED THE STATE OF THE STAT | | |

| AFTER_STEP - stepdefinitions HooksClass.addScreenshot(io.cucumber.java.Scenario) 4 When user click Config Manager menu AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AAI Navigate to Living expense location page AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AAI Navigate to Living expense location page AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AAI Navigate to Living expense location page AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STE | # | Step / Hook Details | Status | Duration |
|--|---|--|--------|----------|
| screenshot 4 When user click Config Manager menu PASSED 0.324 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 5 And user Goto the Temp view screen of living Expense PASSED 0.586 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 5 And user click on First record in living Expense PASSED 1.853 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 6 And user click on First record in living Expense PASSED 1.853 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 5 Ard user click on First record in living Expense PASSED 1.254 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 7 And Navigate to Living expense location page PASSED 0.898 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 7 And Navigate to Living expense location page PASSED 0.898 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.898 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.898 s | 3 | Then user click on configurations Tab | PASSED | 0.133 s |
| 4 When user click Config Manager menu PASSED 0.324 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 5 And user Goto the Temp view screen of living Expense AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 5 And user Click on First record in living Expense AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) ACTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) ACTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) ACTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AND Navigate to Living expense location page AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AND Navigate to Living expense location page AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.888 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.236 s | | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.617 s |
| 4 When user click Config Manager menu AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot AATER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) AA user Gloto the Temp view screen of living Expense AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.853 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) ATER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) ATER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) ATER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) AND Navigate to Living expense location page AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.254 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.254 s | | screenshot | | |
| AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot And user Goto the Temp view screen of living Expense AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot And user click on First record in living Expense AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.853 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.254 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.254 s PASSED 1.255 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.236 s | | AZENTO AND DE SE CONTROL DE S | | |
| screenshot Art Erg Step - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED Art Erg Step - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED Art Erg Step - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) And Navigate to Living expense location page After Step - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 1.254 s PASSED 0.898 s After Step - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 1.236 s | 4 | When user click Config Manager menu | PASSED | 0.324 s |
| 5 And user Goto the Temp view screen of living Expense AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot And user click on First record in living Expense AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) passed | | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 0.909 s |
| 5 And user Goto the Temp view screen of living Expense AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) Screenshot And user click on First record in living Expense AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 7 And Navigate to Living expense location page AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED O.883 s PASSED O.898 s AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED 1.236 s | | screenshot | | |
| AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot And user click on First record in living Expense AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot ARTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) ARTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) ARTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) ARTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.898 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.236 s | | ************************************** | | |
| screenshot And user click on First record in living Expense AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot And Navigate to Living expense location page AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.853 s 1.254 s 0.898 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.236 s | 5 | And user Goto the Temp view screen of living Expense | PASSED | 0.586 s |
| 6 And user click on First record in living Expense PASSED 0.853 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 7 And Navigate to Living expense location page AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.898 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.236 s | | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 1.853 s |
| 6 And user click on First record in living Expense PASSED 0.853 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 7 And Navigate to Living expense location page AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.898 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.236 s | | screenshot | | |
| AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot 7 And Navigate to Living expense location page AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.898 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.254 s | | | | |
| 7 And Navigate to Living expense location page AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.236 s | 6 | And user click on First record in living Expense | PASSED | 0.853 s |
| 7 And Navigate to Living expense location page PASSED 0.898 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.236 s | | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 1.254 s |
| 7 And Navigate to Living expense location page PASSED 0.898 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.236 s | | screenshot | | |
| AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.236 s | | | | |
| AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 1.236 s | 7 | And Navigate to Living expense location page | PASSED | 0.898 s |
| | | | | |
| Screensnot | | screenshot | 7 | |


| # | Step / Hook Details | Status | Duration |
|----|--|--------|--------------|
| | ASSETTO Secretary Se | | |
| 8 | And click on Pencil icon of existing record | PASSED | 0.216 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot | PASSED | 0.847 s |
| | ASSENTO Secretary of Secretary Secr | | |
| 9 | And user Pass the Exceldata value for Living Expense Loccation Modified | PASSED | 0.474 s |
| | AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot ### Property of the company of t | PASSED | 0.198 s |
| 10 | And Enter the Modified value in Area factor income of Living expense parameter | FAILED | 1 m 13.671 s |
| | org.openqa.selenium.TimeoutException: Expected condition failed: waiting for visibility of Proxy element for: DefaultElementLocator 'By.xpath: //ion-label[contains(text(),' Area Factor Income ')]//following-sibling::ion-input/input' (tried for 60 second(s) with 2000 milliseconds interval) at org.openqa.selenium.support.ui.FluentWait.timeoutException(FluentWait.java:263) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:231) at helper.WaitHelper.waitForElementToVisibleWithFluentWait(WaitHelper.java:91) at stepdefinitions.LivingExpense_Master. enter_the_modified_value_in_area_factor_income_of_living_expense_parameter(LivingExpense_Master.java:1192) at ?.Enter the Modified value in Area factor income of Living expense parameter(file:///C:/Users/inindc00075/git/Arshath_ULS/Arshath_AzentioULSFramework/src/test/java/features/MDM_LivingExp_Master.feature:777) Caused by: org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//ion-label[contains(text(),' Area Factor Income ')]//following-sibling::ion-input/input'] (Session info: chrome=106.0.5249.119) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP014547', ip: '10.147.111', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org. openqa.selenium.chrome.ChromeDriver Command: [adc3a906bc1df5753e9014eb39eed2a9, findElement {using=xpath, value=/ion-label[contains(text(),' Area Factor Income ')]//following-sibling::ion-input/input}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 106.0.5249.119, chrome: {chromedriverVersion: 105.0.5195.52 (412c95e51883, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:50422}, javascriptEnabled: true, | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: | | |
| | ws://localhost:50422/devtoo, se:cdpVersion: 106.0.5249.119, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, | | |
| | pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, | | |
| | webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: adc3a906bc1df5753e9014eb39eed2a9 | | |
| | at jdk.internal.reflect.GeneratedConstructorAccessor45.newInstance(Unknown Source) | | |
| | at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) | | |
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) | | |
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) | | |
| | at jdk.proxy2/jdk.proxy2.\$Proxy46.isDisplayed(Unknown Source) | | |
| | at org.openqa.selenium.support.ui.ExpectedConditions.elementlfVisible(ExpectedConditions.java:307) | | |
| | at org.openqa.selenium.support.ui.ExpectedConditions.access\$000(ExpectedConditions.java:40) | | |
| | at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:293) | | |
| | at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:290) | | |
| | at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:208) | | |
| | at helper.WaitHelper.waitForElementToVisibleWithFluentWait(WaitHelper.java:91) | | |
| | at stepdefinitions.LivingExpense_Master. | | |
| | enter_the_modified_value_in_area_factor_income_of_living_expense_parameter(LivingExpense_Master.java:1192) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at io.cucumber.java.lnvoker.dolnvoke(Invoker.java:66) | | |
| | at io.cucumber.java.Invoker.invoke(Invoker.java:24) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |


| Step / Hook Details | Status | Duration |
|---|--------|----------|
| at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| at io.cucumber.core.runner.Runner.runPickle(Runner.java:71) | | |
| at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$0(TestNGCucumberRunner.java:116) | | |
| at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:117) | | |
| at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:113) | | |
| at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:31) | | |
| at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| at org.testng.internal.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:133) | | |
| at org.testng.internal.TestInvoker.invokeMethod(TestInvoker.java:598) | | |
| at org.testng.internal.TestInvoker.invokeTestMethod(TestInvoker.java:173) | | |
| at org.testng.internal.MethodRunner.runInSequence(MethodRunner.java:46) | | |
| at org.testng.internal.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:824) | | |
| at org.testng.internal.TestInvoker.invokeTestMethods(TestInvoker.java:146) | | |
| at org.testng.internal.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:146) | | |
| at org.testng.internal.TestMethodWorker.run(TestMethodWorker.java:128) | | |
| at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) | | |
| at org.testng.TestRunner.privateRun(TestRunner.java:794) | | |
| at org.testng.TestRunner.run(TestRunner.java:596) | | |
| at org.testng.SuiteRunner.runTest(SuiteRunner.java:377) | | |
| at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:371) | | |
| at org.testng.SuiteRunner.privateRun(SuiteRunner.java:332) | | |
| at org.testng.SuiteRunner.run(SuiteRunner.java:276) | | |
| at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:53) | | |
| at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:96) | | |
| at org.testng.TestNG.runSuitesSequentially(TestNG.java:1212) | | |
| at org.testng.TestNG.runSuitesLocally(TestNG.java:1134) | | |
| at org.testng.TestNG.runSuites(TestNG.java:1063) | | |
| at org.testng.TestNG.run(TestNG.java:1031) | | |
| at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115) | | |
| at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251) | | |
| at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77) | | |
| * Not displayable characters are replaced by '?'. | | |
| AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) | PASSED | 1.391 s |
| screenshot | | |

| # | Step / Hook Details | Status | Duration |
|----|--|---------|----------|
| | *** AZENTO************************************ | | |
| 11 | And user save the Record in Living Expensess | SKIPPED | 0.000 s |
| 12 | And click on Pencil icon of existing record | SKIPPED | 0.000 s |
| 13 | And user Pass the Exceldata value for Living Expense Loccation ReModified | SKIPPED | 0.000 s |
| 14 | And Enter the ReModified value in Area factor income of Living expense parameter | SKIPPED | 0.000 s |
| 15 | And user save the Record in Living Expensess | SKIPPED | 0.000 s |


EXPANDED SECTION -- 10 --

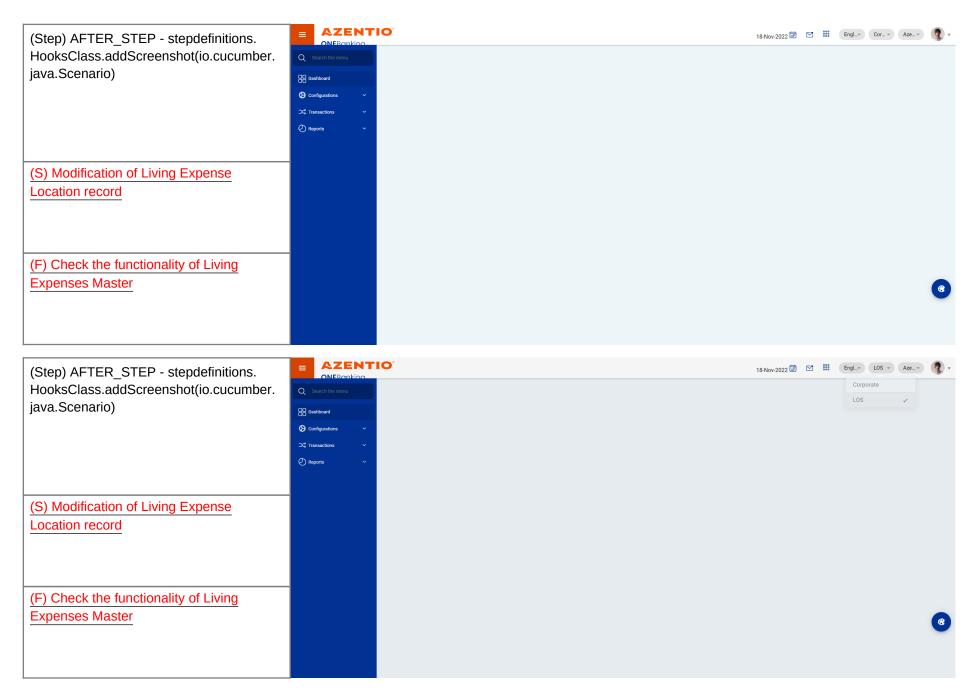


EXPANDED SECTION -- 11 --

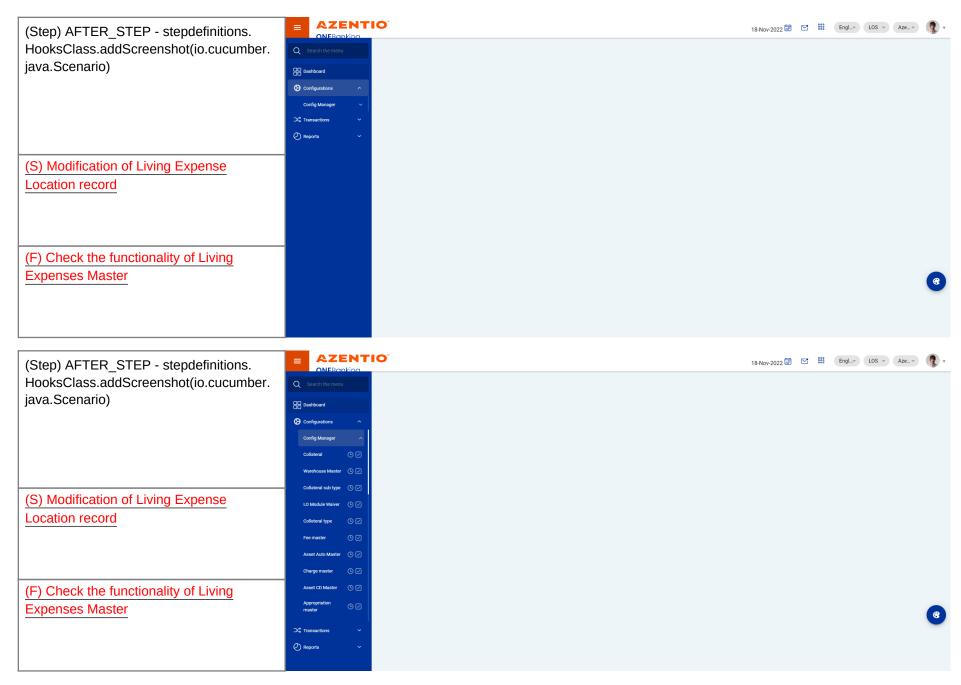

EXPANDED SECTION -- 12 --

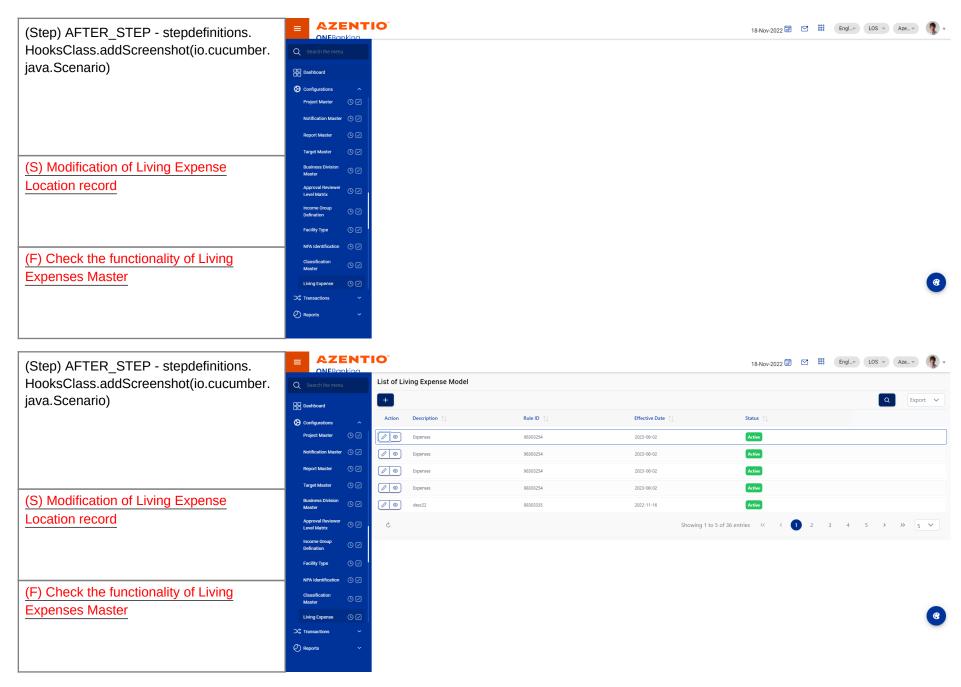

EXPANDED SECTION -- 13 --

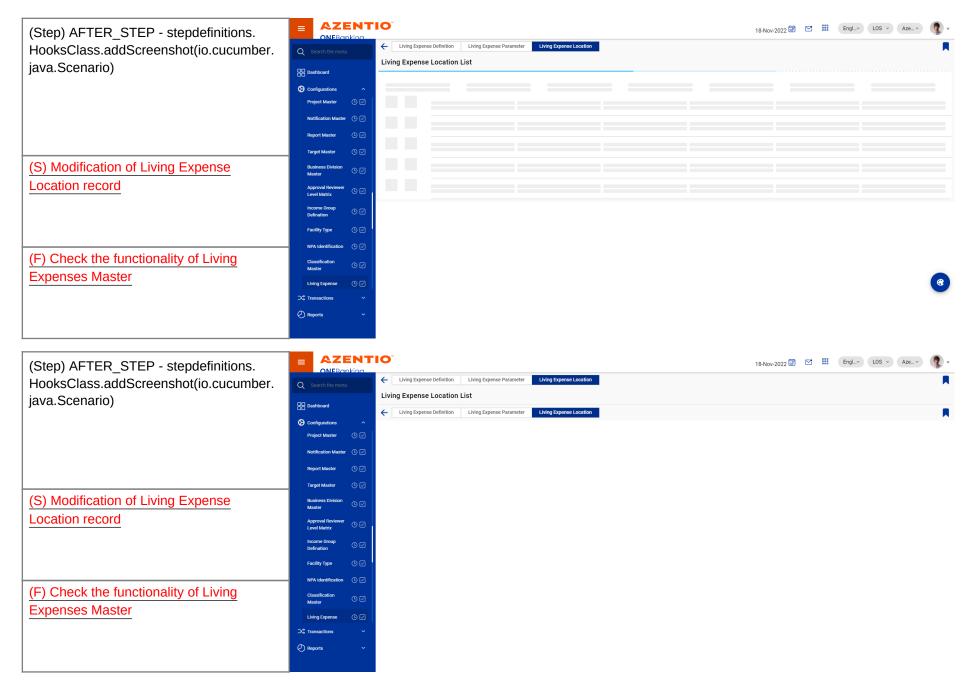

EXPANDED SECTION -- 14 --

