


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	Check the functionality of Customer Address Details screen	1	0	1	0	20.495 s

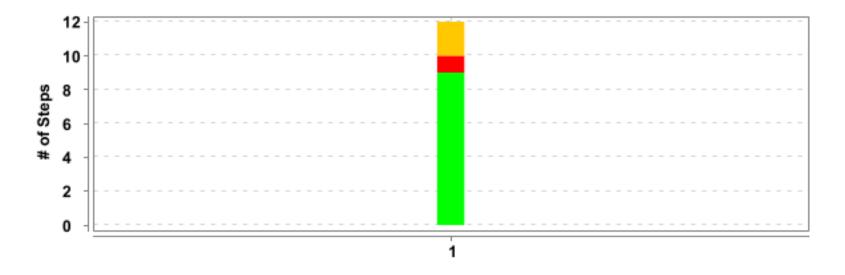

#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the functionality of Customer	Verify the buttons are available on screen while modify the	12	9	1	2	20.489 s
	Address Details screen	Customer Address Information					

DETAILED SECTION

(F)- Check the functionality of Customer Address Details screen

FAILED	DURATION - 20.495 s	Scenarios		Steps	
		Total - 1		Total - 12	
/ 1:02:49.684 F	PM // 1:03:10.179 PM /	Pass - 0	1	Pass - 9	12
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 2	

(S)- Verify the buttons are available on screen while modify the Customer Address Information

FAILED DURATION - 20.489 s	5 Steps	
/ 1:02:49.690 PM // 1:03:10.179 PM /	3-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1	
Check the functionality of Customer Address Details screen	Pass - 9	12
	Skip - 2	
@AT_CAD_005	1 2 3 4 5 6 7 8 9 10 11 12	

#	Step / Hook Details	Status	Duration
1	Given User launch the kuls application	PASSED	4.495 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.414 s
	screenshot		
	AZENTIO INTERNAL		
2	And User Login as maker	PASSED	3.301 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.797 s
	screenshot		
	AMENTO DO DE SOLO DE		


AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario) AFTER_	#	Step / Hook Details	Status	Duration
4 Then click on inbox to search for the Customer Address Details record AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber java. Scenario) 5 Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java. Scenario) Screenshot 4 Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java. Scenario) Screenshot 4 Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java. Scenario) Screenshot 4 Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java. Scenario) PASSED 0.237 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java. Scenario) PASSED 0.168 s	3	Then user should click on the menu toggle	PASSED	0.478 s
Then click on inbox to search for the Customer Address Details record AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io, cucumber, java, Scenario) Screenshot Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io, cucumber, java, Scenario) Screenshot Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io, cucumber, java, Scenario) AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io, cucumber, java, Scenario) AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io, cucumber, java, Scenario) PASSED O.083 s AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io, cucumber, java, Scenario) PASSED O.163 s Then click on the entitle button of the Customer Address Details record of that reference id PASSED O.237 s AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io, cucumber, java, Scenario) PASSED O.237 s AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io, cucumber, java, Scenario) PASSED O.187 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.637 s
4 Then click on inbox to search for the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 5 Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 6 Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 7 Then click on the entitle button of the Customer Address Details record of that reference id PASSED O.237 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED O.237 s O.237 s O.237 s O.237 s O.238 s O.237 s O.237 s O.237 s O.238 s O.237 s		screenshot		
AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) Screenshot Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED O.204 s Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario) PASSED O.237 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED O.237 s AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED O.237 s		C		
screenshot Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.169 s PASSED 0.204 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.163 s Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.237 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.187 s	4	Then click on inbox to search for the Customer Address Details record	PASSED	0.216 s
5 Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot 6 Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED O.083 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 7 Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED O.237 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED O.237 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.318 s
Then click on search button to search the record of Customer Address Details AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.169 s 0.204 s 0.204 s 0.083 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.163 s 0.163 s 0.163 s 0.163 s 7 Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.237 s PASSED 0.237 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.204 s 0.204 s 0.204 s		One		
screenshot Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.083 s 0.163 s PASSED 0.187 s	5	Then click on search button to search the record of Customer Address Details	PASSED	0.169 s
Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) 7 Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.083 s 0.163 s PASSED 0.237 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.237 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.204 s
Then enter the reference id of the Customer Address Details record AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) Screenshot Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.083 s 0.163 s 0.163 s 0.163 s PASSED 0.237 s AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.237 s		screenshot	1	
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) passed 7 Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.163 s 0.237 s PASSED 0.237 s PASSED 0.187 s				
7 Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.237 s 0.187 s	6	Then enter the reference id of the Customer Address Details record	PASSED	0.083 s
7 Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.237 s 0.187 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.163 s
7 Then click on the entitle button of the Customer Address Details record of that reference id AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.237 s 0.187 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.187 s		ARBOYCE ARB		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.187 s	7	Then click on the entitle button of the Customer Address Details record of that reference id	PASSED	0.237 s
screenshot			PASSED	0.187 s
		screenshot	1	

#	Step / Hook Details	Status	Duration
	ACTION OF COMMENT OF COMMENT		
8	Then click on the Additional customer info tab in Customer Personal Information screen	PASSED	1.240 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.451 s
	screenshot		
	DISCONDE DIS		
9	Then select the Customer Address details record from the customer personal detail screen	PASSED	0.442 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.593 s
	screenshot		
	Access Codeh Access Codeh Access Codeh Access Codeh Access Codeh Access Codeh		
10	Then select the record of Address details from the customer identification screen	FAILED	1.029 s
	org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//span[contains(text(),'986')]///td[1]/span/button[1]"} (Session info: chrome=100.0.4896.60) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.0.0-rc-1', revision: 'bc5512cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [a165b75acd64658fd5d266f60d25b788, findElement {using=xpath, value=//span[contains(text(),'986')]///td[1]/span/button[1]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.60, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:50463}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:50463/devtoo, se:cdpVersion: 100.0.4896.60, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: a165b75acd64658fd5d266f60d25b788 at jdk.internal.reflect.GeneratedConstructorAccessor16.newInstance(Unknown Source) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		


#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at stepdefinitions.CustomerAddressDetails. select_the_record_of_address_details_from_the_customer_identification_screen(CustomerAddressDetails.java:268) at ?.select the record of Address details from the customer identification screen(file:///C:/Users/inindc00091/git/Devesh_AzentioULS_FW/AzentioULSFrameworkCopy/src/test/java/features/CustomerAddressDetails.feature:52) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) screenshot	PASSED	0.145 s
11	Then verify Customer Address details screen should get open with mentioned Fields	SKIPPED	0.000 s
12	Then verify the functionality of Back button of customer address details screen	SKIPPED	0.000 s

EXPANDED SECTION -- 8 --


(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario) User ID (S) Verify the buttons are available on **AZENTIO** screen while modify the Customer **Address Information** CONTINUE (F) Check the functionality of Customer Address Details screen **AZENTIO**° (Step) AFTER_STEP - stepdefinitions. **ONE**Banking HooksClass.addScreenshot(io.cucumber. java.Scenario) Q 88 Ø (S) Verify the buttons are available on screen while modify the Customer 0 **Address Information** (F) Check the functionality of Customer Address Details screen

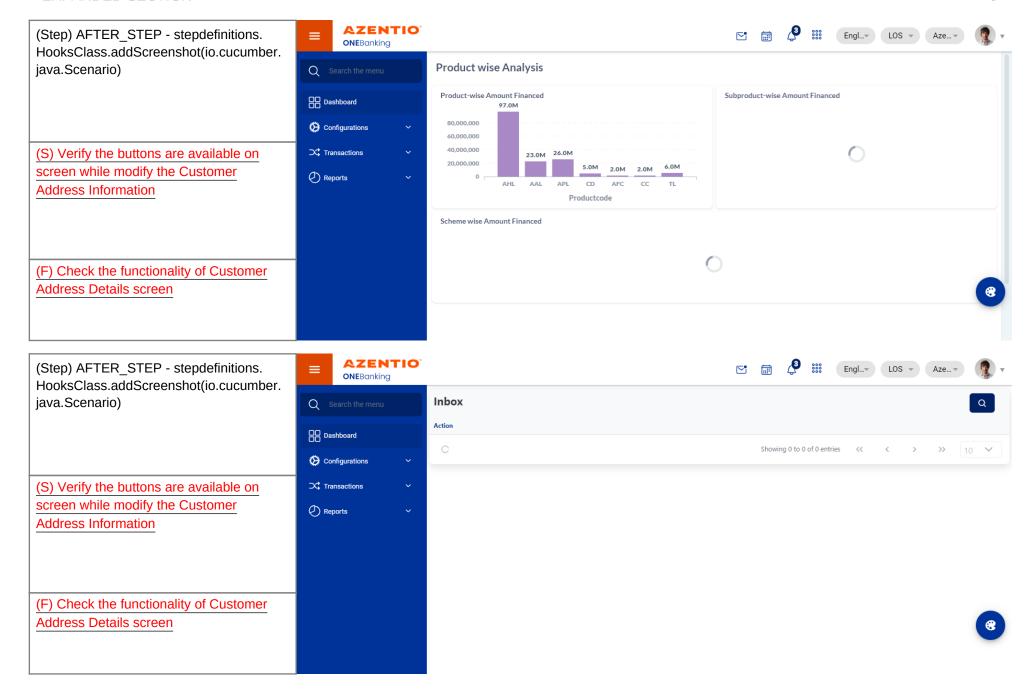

EXPANDED SECTION

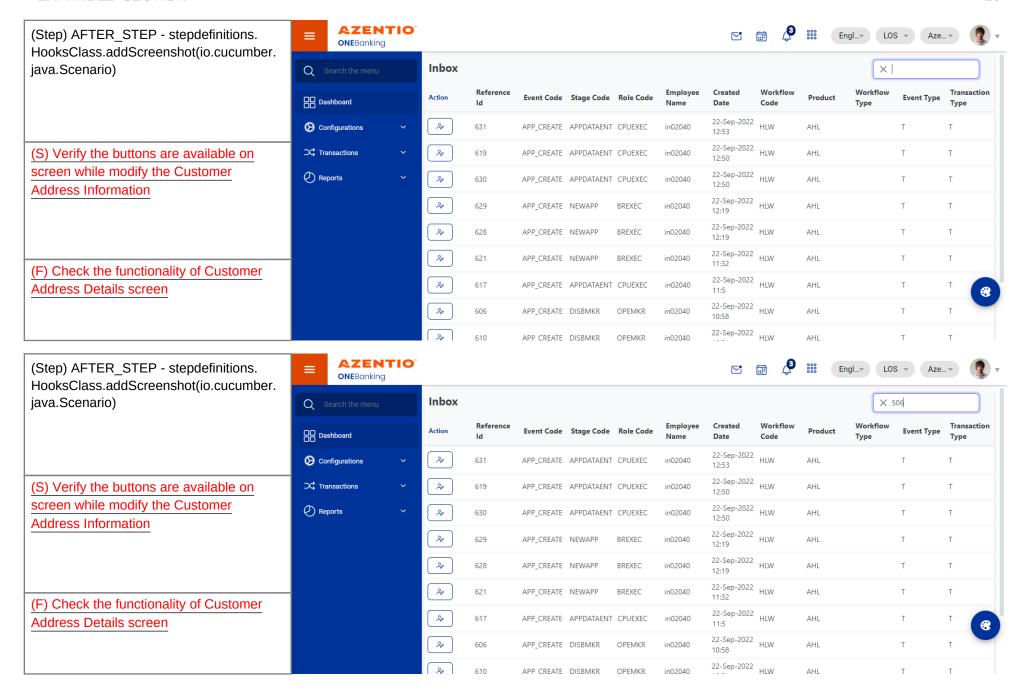

EXPANDED SECTION -- 11 --

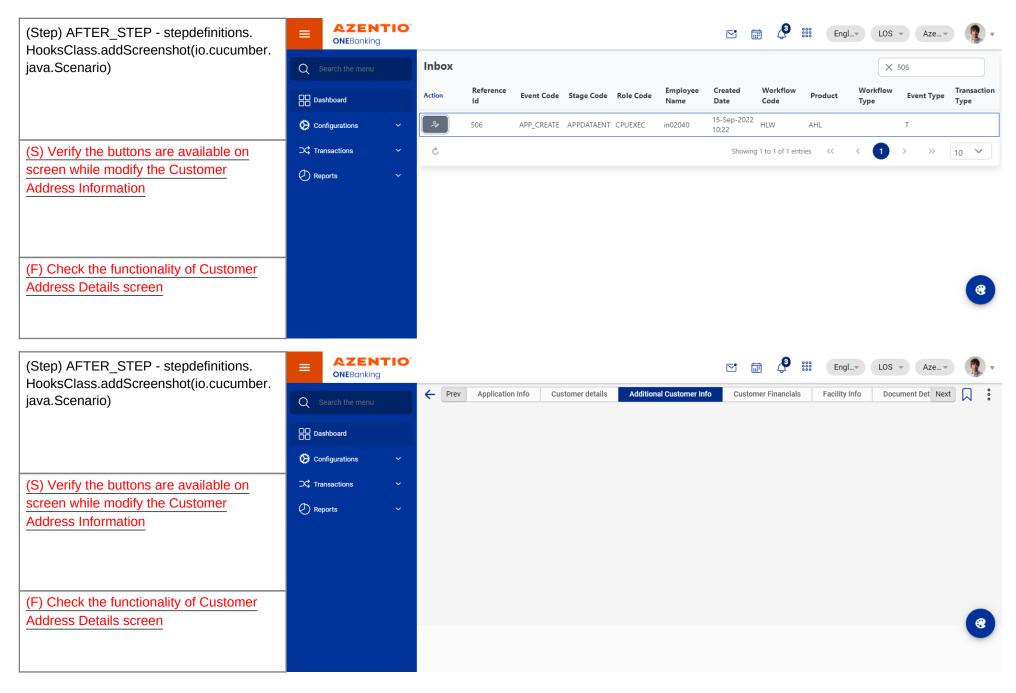

EXPANDED SECTION --- 12 --

