
**Duration** : 9.489 s Start: Jul 20, 5:39:09.634 PM End: Jul 20, 5:39:19.123 PM Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 26 27 40 50 60 40 50 60 40 50 60 30 Pass % 70 30 Pass % 70 30 Pass % 70 20 80 20 20 80 80 90 90 100

FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	Check the functionality of product master	1	0	1	0	9.489 s

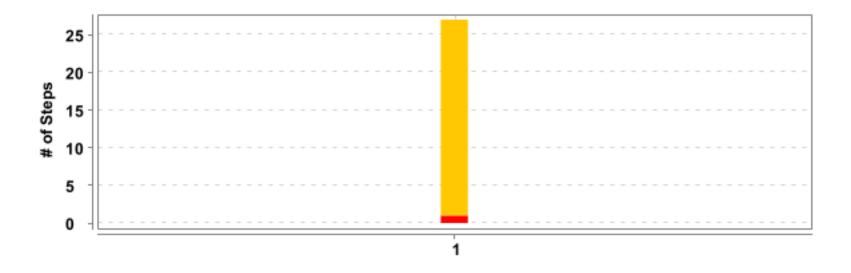


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the functionality of product	Product Master - Modify records (approve, reject and return)	27	0	1	26	9.481 s
	<u>master</u>	at maker stage					

DETAILED SECTION -- 4 --

## **(F)-** Check the functionality of product master

FAILED	DURATION - 9.489 s	Scenarios		Steps	
		Total - 1		Total - 27	
/ 5:39:09.634 PI	M // 5:39:19.123 PM /	Pass - 0	1	Pass - 0	27
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 26	

## (S)- Product Master - Modify records (approve, reject and return) at maker stage

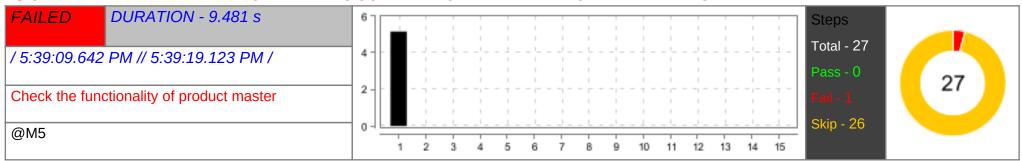

#	Step / Hook Details	Status	Duration
1	Given User launch the kuls application	FAILED	5.154 s
	org.openqa.selenium.WebDriverException: unknown error: net::ERR_CONNECTION_REFUSED (Session info: chrome=100.0.4896.127) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU', ip: '10.1.47.121', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [326add7c9cc967e9cb11e30697d603de, get {url=http://10.1.56.122:8680/cob-qc}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.127, chrome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5, userDataDir: C:\Users\ININDC~1\AppData\L}, goog:chromeOptions: {debuggerAddress: localhost:53434}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53434/devtoo, se:cdpVersion: 100.0.4896.127, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 326add7c9cc967e9cb11e30697d603de at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.get(RemoteWebDriver.java:326) at stepdefinitions.KULS_Login.user_launch_the_kuls_application(KULS_Login.java:27) at ?.User launch the kuls application(file:///C:/Users/inindc00091/git/Azentio_ULS_04/AzentioAutomationFramework/src/test/java/features/ ProductMaster_Retail.feature:4) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.203 s
	screenshot  +  **Bit Court To randout **Court To ra		
		CKIDDED	0.000 -
2	And User Login as maker  Then user should povigete to product master.	SKIPPED	0.000 s
3	Then user should navigate to product master	SKIPPED	0.001 s
4	And click on edit view of product master	SKIPPED	0.001 s
5	Then click on edit button of record to modify  Then was about worth the buttons available an agreen while modify	SKIPPED	0.000 s
6	Then user should verify the buttons available on screen while modify	SKIPPED	0.000 s
7	Then verify system should modify before approved the record	SKIPPED	0.001 s
8	And click on eye icon of product master	SKIPPED	0.000 s
9	Then verify system should modify already approved record	SKIPPED SKIPPED	0.000 s 0.000 s
11	Then verify system allow user to save modified record with valid data  Then system should display the confirmation message	SKIPPED	0.000 s
12	Then click on inbox button	SKIPPED	0.000 s
13	And select the modified record from inbox to approve	SKIPPED	0.000 s
14	Then click on submit button	SKIPPED	0.001 s
15	Then user verify that system should display confirmation message after submit	SKIPPED	0.000 s
16	And click on edit view of product master	SKIPPED	0.000 s
17	Then click on edit button of record2 to modify	SKIPPED	0.000 s
18	Then verify system allow user to save modified record with valid data	SKIPPED	0.000 s
19	Then click on inbox button	SKIPPED	0.000 s
20	And select the modified record from inbox to reject	SKIPPED	0.000 s
21	Then click on submit button	SKIPPED	0.000 s
	The state of the s	J LD	1 3.000 0

DETAILED SECTION -- 6 --

#	Step / Hook Details	Status	Duration
22	And click on edit view of product master	SKIPPED	0.000 s
23	Then click on edit button of record3 to modify	SKIPPED	0.000 s
24	Then verify system allow user to save modified record with valid data	SKIPPED	0.000 s
25	Then click on inbox button	SKIPPED	0.000 s
26	And select the modified record from inbox to return	SKIPPED	0.000 s
27	Then click on submit button	SKIPPED	0.001 s


EXPANDED SECTION -- 7 -

Reload

(Step) AFTER\_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) Product Master - Modify records (approve, reject and return) at maker stage

 $\frac{\text{(F) Check the functionality of product}}{\text{master}}$ 



Details