

Cucumber Report

14 Sep 2023, 11:57:28 AM

Start : Sep 14, 11:57:20.892 AM

End : Sep 14, 11:57:26.676 AM

Duration : 5.784 s

Features

Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0


PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 0
SKIPPED - 8





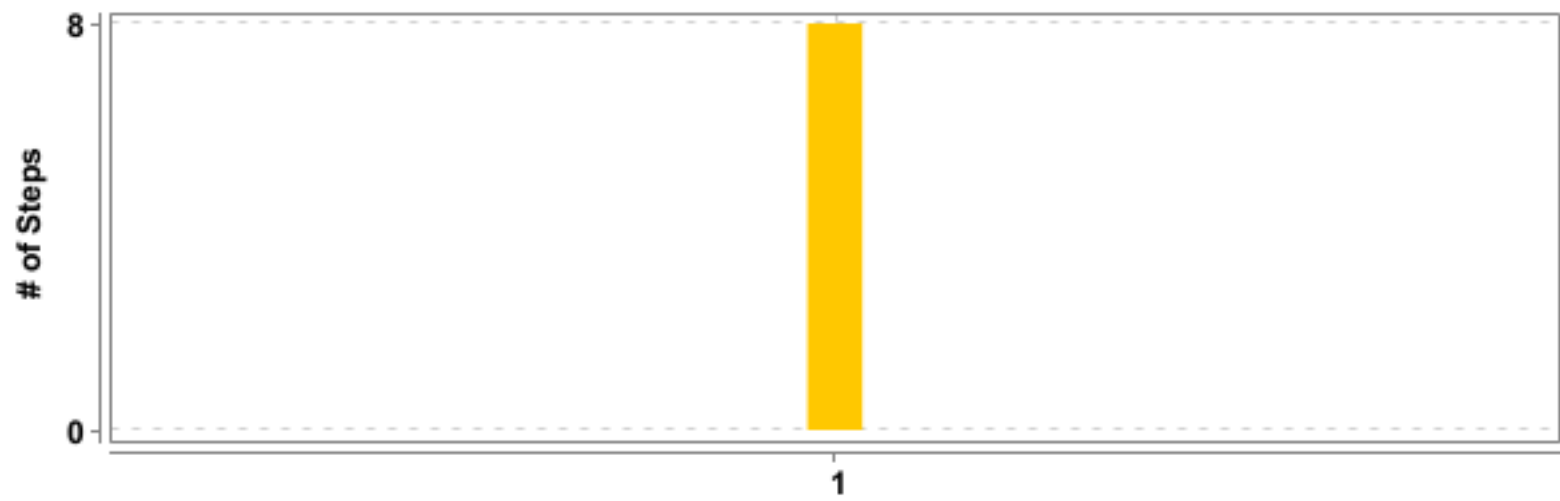

#	Feature Name	T	P	F	S	Duration
1	<u>Title of your feature</u>	1	0	1	0	5.784 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Title of your feature</u>	<u>To verify user is able to Add Customer Debt record in the system</u>	8	0	0	8	5.778 s

(F)- Title of your feature

FAILED	DURATION - 5.784 s	Scenarios		Steps	
/ 11:57:20.892 AM // 11:57:26.676 AM /		Total - 1		Total - 8	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 8	

(S)- To verify user is able to Add Customer Debt record in the system
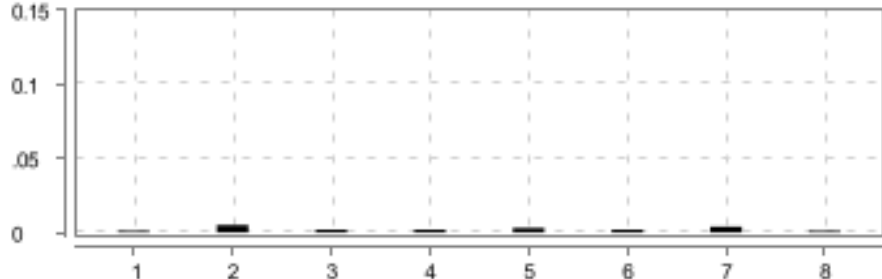
<div>FAILED</div> <div>DURATION - 5.778 s</div>			<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 8</div>	
/ 11:57:20.898 AM // 11:57:26.676 AM /				
Title of your feature				
@tag @AT_CD_01				

#	Step / Hook Details	Status	Duration
	BEFORE - stepdefinitions.HooksClass.browserSetup(io.cucumber.java.Scenario) org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Response code 500. Message: session not created from no such execution context: loader has changed while resolving nodes (Session info: chrome=116.0.5845.188) Host info: host: 'AWS-PVDI-23', ip: '172.27.152.24' Build info: version: '4.11.0', revision: '040bc5406b' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, newSession {capabilities=[Capabilities {browserName: chrome, goog:chromeOptions: {args: [--remote-allow-origins=*, --disable-popup-blocking, --disable-notifications], binary: C:\Program Files\Google\Chr..., extensions: []}}}] at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:140) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:518) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:232) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:159) at org.openqa.selenium.chromium.ChromiumDriver.<init>(ChromiumDriver.java:108) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:88) at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:83)	FAILED	5.702 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.chrome.ChromeDriver.<init>(ChromeDriver.java:72) at resources.BaseClass.initializeDriver(BaseClass.java:33) at stepdefinitions.HooksClass.browserSetup(HooksClass.java:50)		
1	Given navigate the IJARA URL	SKIPPED	0.001 s
2	And login with valid credentials	SKIPPED	0.005 s
3	And User get the test data for test case AT_CD_01	SKIPPED	0.002 s
4	And User click the module name dropdown in ULS application	SKIPPED	0.002 s
5	And User select the module name as LOS in ULS application	SKIPPED	0.003 s
6	And User click the Mail box in ULS application	SKIPPED	0.002 s
7	And User click the Search button under inbox	SKIPPED	0.004 s
8	And User search the Ref id under inbox	SKIPPED	0.001 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "this.driver" is null at stepdefinitions.HooksClass.TearDown(HooksClass.java:74)		