Cucumber Report

| Start : Jul 20, 2:36:11.157 PM	End : Jul 20, 2:36:51.206 PM	Duration : 40.049 s
Features	Scenarios	Steps
PASSED - 1 FAILED - 0 SKIPPED - 0	PASSED - 1 FAILED - 0 SKIPPED - 0	PASSED - 11 FAILED - 0 SKIPPED - 0

#	Feature Name	T	P	F	S	Duration
1	Product Master Retail Functionality	1	1	0	0	40.049 s
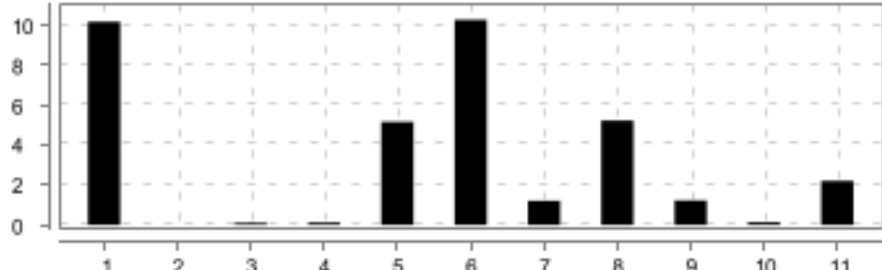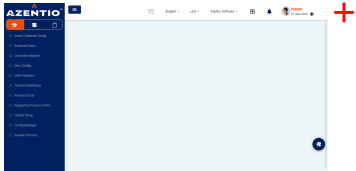
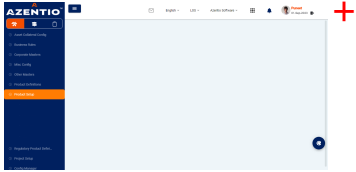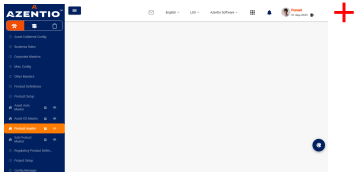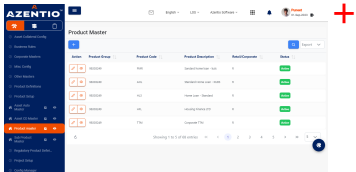| #	Feature Name	Scenario Name	T	P	F	S	Duration
1	Product Master Retail Functionality	System should not allow user to save the records in system with invalid data	11	11	0	0	40.046 s

(F)- Product Master Retail Functionality

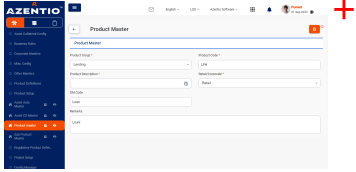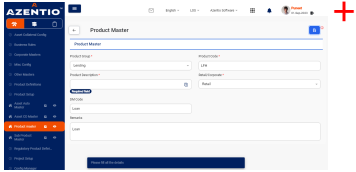| PASSED	DURATION - 40.049 s	Scenarios		Steps	
/ 2:36:11.157 PM // 2:36:51.206 PM /		Total - 1		Total - 11	
		Pass - 1		Pass - 11	
		Fail - 0	1	Fail - 0	11
		Skip - 0		Skip - 0	

(S)- System should not allow user to save the records in system with invalid data

PASSED	DURATION - 40.046 s		Steps	
/ 2:36:11.160 PM // 2:36:51.206 PM /			Total - 11	
Product Master Retail Functionality			Pass - 11	11
@ProductMaster_Retail_invalid			Fail - 0	
			Skip - 0	

#	Step / Hook Details	Status	Duration
1	Given User launch the kuls application	PASSED	10.160 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.121 s
	screenshot		
2	And User Login as maker	PASSED	0.000 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.084 s
	screenshot		

#	Step / Hook Details	Status	Duration
3	Then click on Product Setup	PASSED	0.095 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.113 s
	screenshot		
4	Then click on Product Master eye icon	PASSED	0.116 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.223 s
	screenshot		
5	Then click on Product Master add button	PASSED	5.163 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.172 s
	screenshot		
6	Then verify functionality and asterik mark of the field Product Group	PASSED	10.263 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.164 s
	screenshot		

#	Step / Hook Details	Status	Duration
7	Then verify functionality and asterik mark of the field Product Code	PASSED	1.212 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.101 s
	screenshot		
8	Then verify functionality and asterik mark of the field RetailCorporate	PASSED	5.229 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.128 s
	screenshot		
9	Then verify functionality of the field DM Code	PASSED	1.223 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.109 s
	screenshot		
10	Then verify the field Remarks	PASSED	0.134 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.098 s
	screenshot		

#	Step / Hook Details	Status	Duration
11	Then click on save button	PASSED	2.209 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.090 s
	screenshot		

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records in system with invalid data
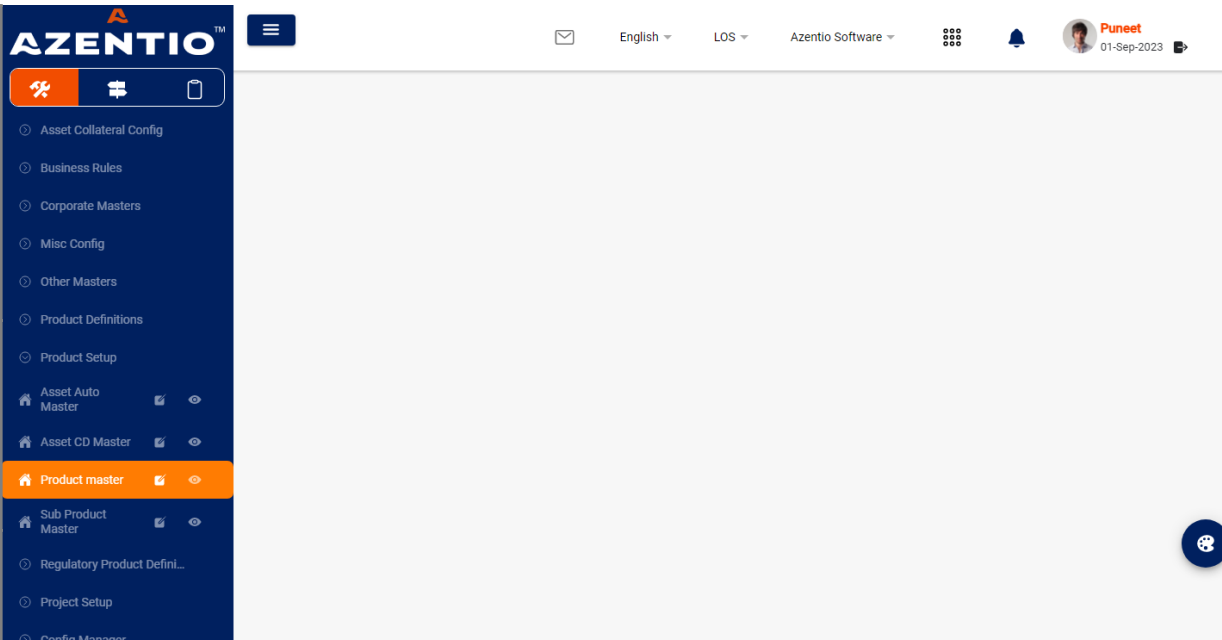
(F) Product Master Retail Functionality

AZENTIO™

Asset Collateral Config
Business Rules
Corporate Masters
Misc Config
Other Masters
Product Definitions
Product Setup
Regulatory Product Defini...
Project Setup
Config Manager
Sample Screens

English · LOS · Azentio Software ·
Puneet
01-Sep-2023

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

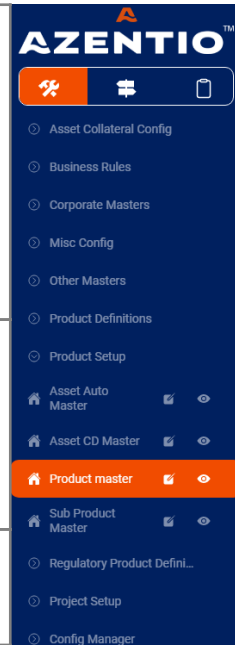(S) System should not allow user to save the records in system with invalid data

(F) Product Master Retail Functionality

AZENTIO™

Asset Collateral Config
Business Rules
Corporate Masters
Misc Config
Other Masters
Product Definitions
Product Setup
Regulatory Product Defini...
Project Setup
Config Manager
Sample Screens

English · LOS · Azentio Software ·
Puneet
01-Sep-2023

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records in system with invalid data
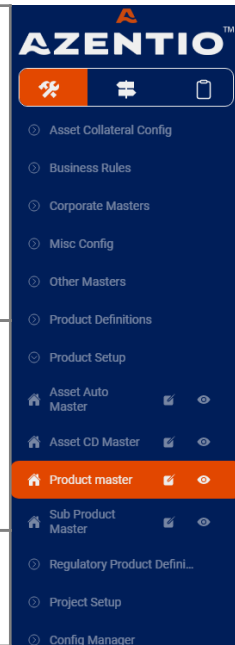
(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records in system with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should not allow user to save
the records in system with invalid data
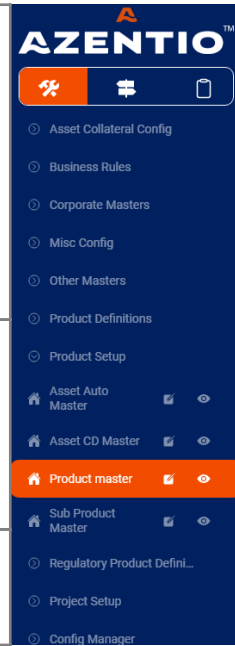
(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions.
HooksClass.addScreenshot(io.cucumber.
java.Scenario)

(S) System should not allow user to save
the records in system with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records in system with invalid data
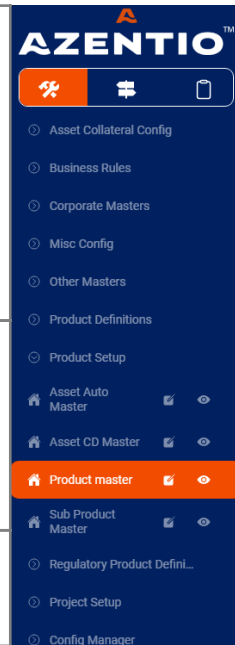
(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records in system with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records in system with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records in system with invalid data

(F) Product Master Retail Functionality

(Step) AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario)

(S) System should not allow user to save the records in system with invalid data

(F) Product Master Retail Functionality