


FEATURES SUMMARY -- 2 --



#	Feature Name	T	P	F	S	Duration
1	Check the functionality of Customer Address Details screen	1	0	1	0	18.479 s

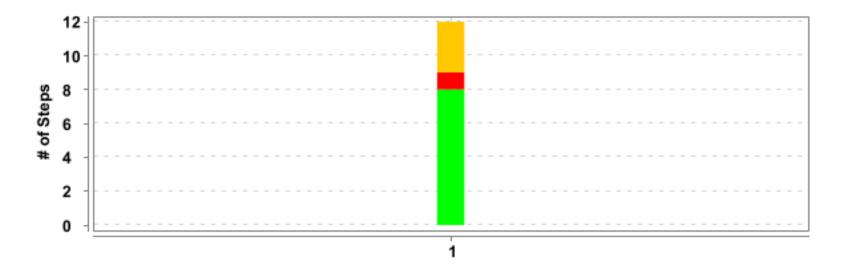

#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Check the functionality of Customer	Verify the buttons are available on screen while modify the	12	8	1	3	18.475 s
	Address Details screen	Customer Address Information					

**DETAILED SECTION** 

## (F)- Check the functionality of Customer Address Details screen

FAILED	DURATION - 18.479 s	Scenarios		Steps	
		Total - 1		Total - 12	
/ 1:35:14.799 PN	M // 1:35:33.278 PM /	Pass - 0	1	Pass - 8	12
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 3	

## (S)- Verify the buttons are available on screen while modify the Customer Address Information

FAILED DURATION - 18.475 s	5 Steps	
/ 1:35:14.803 PM // 1:35:33.278 PM /	3	
Check the functionality of Customer Address Details screen	2	12
	Skip - 3	
@AT_CAD_005	1 2 3 4 5 6 7 8 9 10 11 12	

#	Step / Hook Details	Status	Duration
1	Given User launch the kuls application	PASSED	4.845 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.448 s
	screenshot		
	AZENTIO SAME		
2	And User Login as maker	PASSED	3.249 s
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.215 s
	screenshot		
	AZENTO  ORDER  O 9 8 000 00 00 00 00 00 00 00 00 00 00 00		

AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenari	#	Step / Hook Details	Status	Duration
4 Then click on inbox to search for the Customer Address Details record  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  5 Then click on search button to search the record of Customer Address Details  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  passed  7 Then click on the entitle button of the Customer Address Details record of that reference id  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  passed  PASSED  0.178 s  PASSED  0.345 s  PASSED  0.184 s  0.172 s	3	Then user should click on the menu toggle	PASSED	1.139 s
Then click on inbox to search for the Customer Address Details record  AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io.cucumber.java.Scenario)  PASSED  O.233 s  PASSED  O.243 s  PASSED  O.345 s  AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io.cucumber.java.Scenario)  AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io.cucumber.java.Scenario)  Screenshot  AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io.cucumber.java.Scenario)  PASSED  O.184 s  AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io.cucumber.java.Scenario)  PASSED  O.106 s  PASSED  O.172 s  AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io.cucumber.java.Scenario)  PASSED  O.172 s  AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io.cucumber.java.Scenario)  PASSED  O.172 s  AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io.cucumber.java.Scenario)  PASSED  O.232 s  AFTER_STEP - stepdefinitions, HooksClass, addScreenshot(io.cucumber.java.Scenario)  PASSED  O.198 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.279 s
4 Then click on inbox to search for the Customer Address Details record  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  5 Then click on search button to search the record of Customer Address Details  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  screenshot  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED 0.122 s  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED 0.232 s  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED 0.198 s		screenshot		
AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(jo.cucumber.java.Scenario)  Screenshot  Then click on search button to search the record of Customer Address Details  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(jo.cucumber.java.Scenario)  Screenshot  Then enter the reference id of the Customer Address Details record  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(jo.cucumber.java.Scenario)  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(jo.cucumber.java.Scenario)  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(jo.cucumber.java.Scenario)  Then click on the entitle button of the Customer Address Details record of that reference id  AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(jo.cucumber.java.Scenario)  PASSED  0.232 s  AFTER_STEP - stepdefinitions. HooksClass.addScreenshot(jo.cucumber.java.Scenario)  PASSED  0.198 s		ACTION OF SE		
screenshot  Then click on search button to search the record of Customer Address Details  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  screenshot  Then enter the reference id of the Customer Address Details record  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.194 s  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  passed  7 Then click on the entitle button of the Customer Address Details record of that reference id  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.232 s  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.198 s	4	Then click on inbox to search for the Customer Address Details record	PASSED	0.178 s
Then click on search button to search the record of Customer Address Details  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(jo.cucumber.java.Scenario)  Screenshot  Then enter the reference id of the Customer Address Details record  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(jo.cucumber.java.Scenario)  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(jo.cucumber.java.Scenario)  Then click on the entitle button of the Customer Address Details record of that reference id  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(jo.cucumber.java.Scenario)  PASSED  0.232 s  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(jo.cucumber.java.Scenario)  PASSED  0.232 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.233 s
Then click on search button to search the record of Customer Address Details  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  Screenshot  Then enter the reference id of the Customer Address Details record  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.184 s  0.184 s  0.106 s  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.102 s  Then click on the entitle button of the Customer Address Details record of that reference id  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.232 s  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.108 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  Screenshot  Then enter the reference id of the Customer Address Details record  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  Screenshot  Then click on the entitle button of the Customer Address Details record of that reference id  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.184 s  0.184 s  0.184 s		One   One		
screenshot  Then enter the reference id of the Customer Address Details record  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  Then click on the entitle button of the Customer Address Details record of that reference id  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.106 s  PASSED  0.172 s  Then click on the entitle button of the Customer Address Details record of that reference id  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.198 s	5	Then click on search button to search the record of Customer Address Details	PASSED	0.345 s
6 Then enter the reference id of the Customer Address Details record  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  Screenshot  7 Then click on the entitle button of the Customer Address Details record of that reference id  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.106 s  0.172 s  0.172 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.184 s
Then enter the reference id of the Customer Address Details record  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario)  Screenshot  Then click on the entitle button of the Customer Address Details record of that reference id  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario)  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java.Scenario)  PASSED  0.106 s  0.172 s  0.172 s		screenshot	1	
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  screenshot  7 Then click on the entitle button of the Customer Address Details record of that reference id  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.172 s  0.172 s  PASSED  0.232 s  PASSED  0.232 s  0.198 s				
7 Then click on the entitle button of the Customer Address Details record of that reference id  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.232 s  0.198 s	6	Then enter the reference id of the Customer Address Details record	PASSED	0.106 s
7 Then click on the entitle button of the Customer Address Details record of that reference id  AFTER_STEP - stepdefinitions. HooksClass. addScreenshot(io.cucumber.java. Scenario)  PASSED  0.232 s  0.198 s		AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.172 s
7 Then click on the entitle button of the Customer Address Details record of that reference id  AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)  PASSED  0.232 s  0.198 s		screenshot		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.198 s		Company of the comp		
AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario) PASSED 0.198 s	7	Then click on the entitle button of the Customer Address Details record of that reference id	PASSED	0.232 s
screenshot			PASSED	0.198 s
		screenshot	7	


#	Step / Hook Details	Status	Duration
	ACSINO  Common Service  Common		
8	Then click on the Additional customer info tab in Customer Personal Information screen	PASSED	1.222 s
	AFTER STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.637 s
	screenshot		
	ABSTRO  D		
9	Then select the Customer Address details record from the customer personal detail screen	FAILED	0.052 s
	org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath", "selector":"(//ion-title{text()=' Address Details '])[2]"} (Session info: chrome=100.0.4896.60) For documentation on this error, please visit: https://selenium.dev/exceptions/fno_such_element Buid info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'PG00X8KU'; pi: '10.1.47.121', os.name: Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [588053177b2fa8229be295c0996e759a, findElement {using=xpath, value=(//ion-title{text()=' Address Details ']](2]} Capabilities {acceptinsecureCerts: false, browserName: chrome, browserVersion: 100.0.4896.60, rome: {chromedriverVersion: 99.0.4844.51 (d537ec02474b5, userDataDir: C:\Users\ININDC=1\AppData\L), goog:chromeOptions: {debuggerAddress: localhost:50954}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:50954/devtoo, se:cdp/version: 100.0.4896.60, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:acredBlob: true, webauthn:extension:largeBlob: true, webauthn:vitualAuthenticators: true) Session ID: 598053177b2fa8229be295c0996e759a at jdk.internal.reflect.GeneratedConstructorAccessorInpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:134) at org.openqa.selenium.remote.Service.DriverCommandExecutor.execute(PriverCommandExecutor.java:164) at org.openqa.selenium.remot		


DETAILED SECTION -- 7 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.\$Proxy45.getWrappedElement(Unknown Source) at org.openqa.selenium.remote.internal.WebElementToJsonConverter.apply(WebElementToJsonConverter.java:51) at java.base/java.util.stream.ReferencePipeline\$3\$1.accept(ReferencePipeline.java:197) at java.base/java.util.Spliterators\$ArraySpliterator.forEachRemaining(Spliterators.java:992) at java.base/java.util.stream.AbstractPipeline.copyInto(AbstractPipeline.java:509) at java.base/java.util.stream.AbstractPipeline.wrapAndCopyInto(AbstractPipeline.java:499) at java.base/java.util.stream.ReduceOps\$ReduceOp.evaluateSequential(ReduceOps.java:921) at java.base/java.util.stream.AbstractPipeline.evaluate(AbstractPipeline.java:234) at java.base/java.util.stream.ReferencePipeline.collect(ReferencePipeline.java:682) at org.openqa.selenium.remote.RemoteWebDriver.executeScript(RemoteWebDriver.java:478) at helper.JavascriptHelper.scrollIntoView(JavascriptHelper.java:26) at helper.JavascriptHelper.scrollIntoView(JavascriptHelper.java:48) at stepdefinitions.CustomerAddressDetails. select_the_customer_address_details_record_from_the_customer_personal_detail_screen(CustomerAddressDetails.java:97) at ?select the Customer Address details record from the customer personal detail screen(file:///C:/Users/inindc00091/git/Devesh_AzentioULS_FW/AzentioULSFrameworkCopy/src/test/java/features/CustomerAddressDetails.feature:51) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.152 s
	Screenshot     April   April		
10	Then select the record of Address details from the customer identification screen	SKIPPED	0.000 s
11	Then verify Customer Address details screen should get open with mentioned Fields	SKIPPED	0.000 s
12	Then verify the functionality of Back button of customer address details screen	SKIPPED	0.000 s


EXPANDED SECTION -- 8 --

(Step) AFTER\_STEP - stepdefinitions. HooksClass.addScreenshot(io.cucumber. java.Scenario) User ID (S) Verify the buttons are available on **AZENTIO** screen while modify the Customer **Address Information** CONTINUE (F) Check the functionality of Customer Address Details screen **AZENTIO**° (Step) AFTER\_STEP - stepdefinitions. **ONE**Banking HooksClass.addScreenshot(io.cucumber. java.Scenario) Q 88 Ø (S) Verify the buttons are available on screen while modify the Customer 0 **Address Information** (F) Check the functionality of Customer Address Details screen

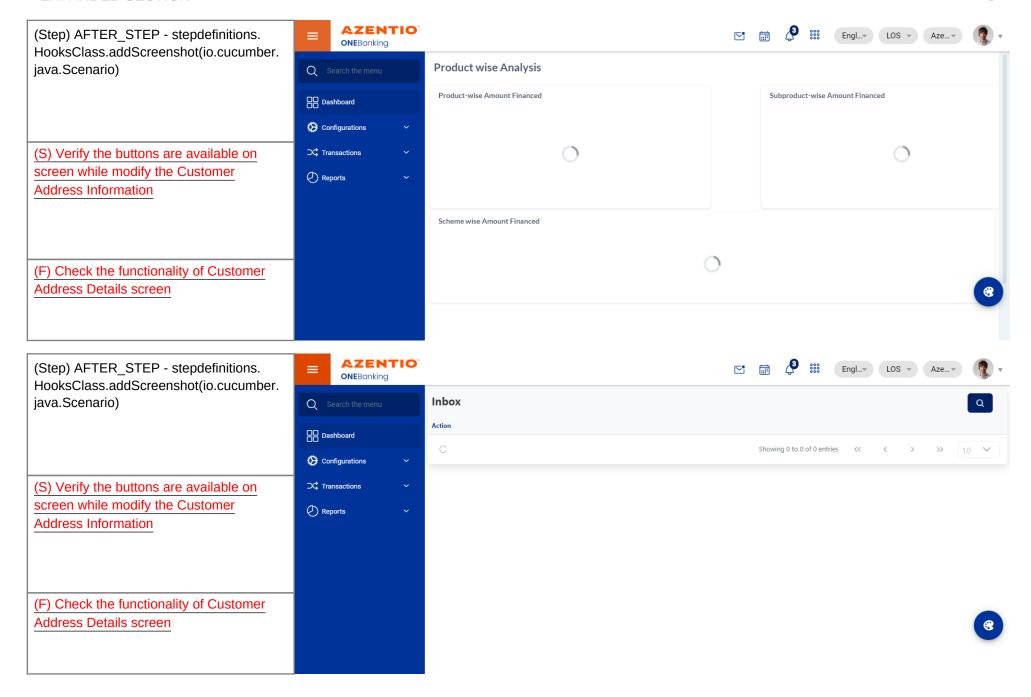

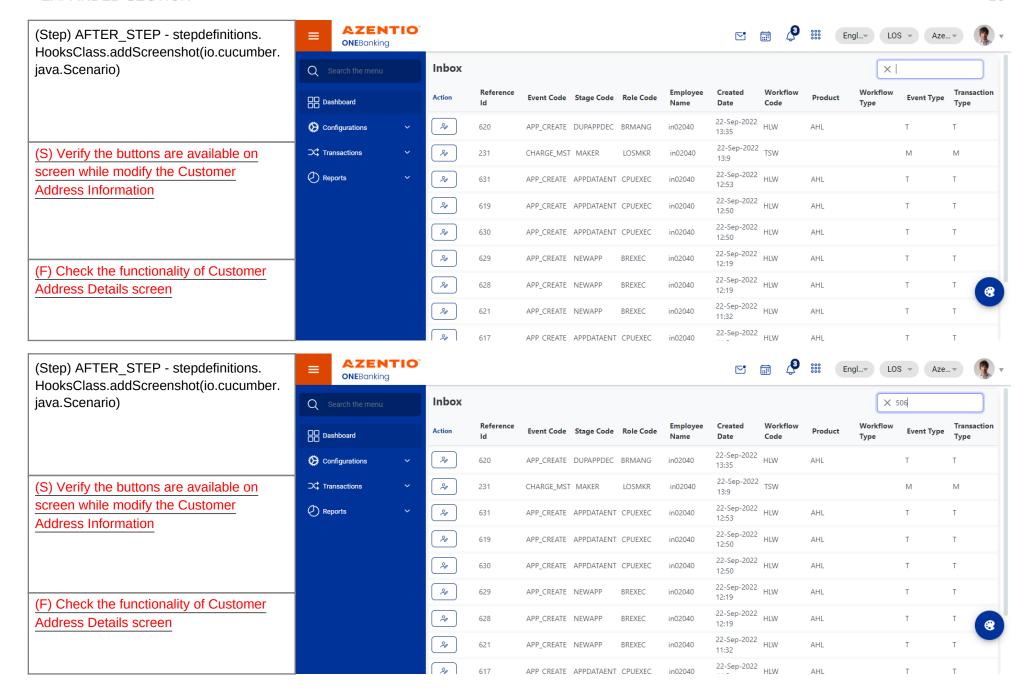

EXPANDED SECTION --- 11 --

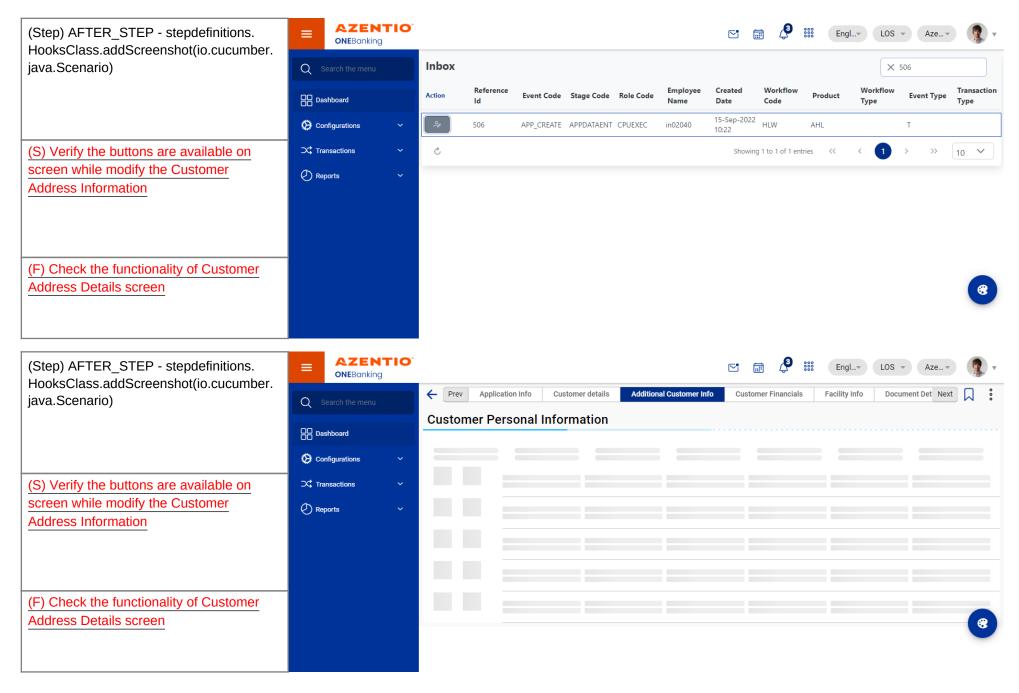

EXPANDED SECTION -- 12 --

