Cucumber Report

| Start : Jul 20, 5:42:44.291 PM	End : Jul 20, 5:45:19.466 PM	Duration : 2 m 35.175 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 0 FAILED - 1 SKIPPED - 6

#	Feature Name	T	P	F	S	Duration
1	Product Master Retail Functionality	1	0	1	0	2 m 35.175 s
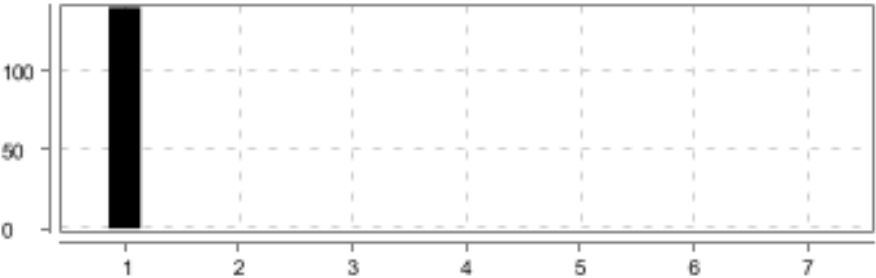
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Product Master Retail Functionality	verify Checker user is able to Approve the record	7	0	1	6	2 m 35.172 s

(F)- Product Master Retail Functionality

FAILED	DURATION - 2 m 35.175 s	Scenarios		Steps	
		Total - 1		Total - 7	
/ 5:42:44.291 PM // 5:45:19.466 PM /		Pass - 0	1	Pass - 0	7
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 6	

(S)- verify Checker user is able to Approve the record

FAILED	DURATION - 2 m 35.172 s		Steps	
/ 5:42:44.294 PM // 5:45:19.466 PM /			Total - 7	
Product Master Retail Functionality			Pass - 0	7
@ProductMaster_Retail_Approve			Fail - 1	
			Skip - 6	

#	Step / Hook Details	Status	Duration
1	Given User launch the kuls application	FAILED	2 m 20.191 s

	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [f322267c8617356d26272596f326c6c9, findElement {using=xpath, value=//ion-segment-button[@ng-reflect-text='Configuration']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 98.0.4758.80 (7f0488e8ba0d8..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:57767}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:57767/devtoo..., se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: f322267c8617356d26272596f326c6c9
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:381) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:373) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) at jdk.proxy2/jdk.proxy2.$Proxy45.toString(Unknown Source) at java.base/java.lang.String.valueOf(String.java:4215) at java.base/java.lang.StringBuilder.append(StringBuilder.java:169) at org.openqa.selenium.support.ui.ExpectedConditions$10.toString(ExpectedConditions.java:298) at java.base/java.lang.String.valueOf(String.java:4215) at java.base/java.lang.StringBuilder.append(StringBuilder.java:169) at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:229) at helper.WaitHelper.waitForElementToVisibleWithFluentWait(WaitHelper.java:91) at stepdefinitions.KULS_Application_Login.loginUlsApplicationAsMaker(KULS_Application_Login.java:40) at stepdefinitions.KULS_Login.user_launch_the_kuls_application(KULS_Login.java:28) at ?.User launch the kuls application(file:///C:/Users/inindc00089/git/Azentio_ULSFramework/AzentioAutomationFramework/src/test/java/features/ProductMaster_Retail.feature:61) * Not displayable characters are replaced by '?'.		
	AFTER_STEP - stepdefinitions.HooksClass.addScreenshot(io.cucumber.java.Scenario)	FAILED	12.158 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [f322267c8617356d26272596f326c6c9, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 98.0.4758.80 (7f0488e8ba0d8..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:57767}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:57767/devtoo..., se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: f322267c8617356d26272596f326c6c9 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:347) at stepdefinitions.HooksClass.addScreenshot(HooksClass.java:42)		
2	And User Login as maker	SKIPPED	0.000 s
3	Then click on Product Setup	SKIPPED	0.000 s
4	Then click on Product Master eye icon	SKIPPED	0.000 s
5	Then click on inbox	SKIPPED	0.000 s
6	And open the record	SKIPPED	0.000 s
7	Then submit the Record	SKIPPED	0.000 s
	AFTER - stepdefinitions.HooksClass.TearDown(io.cucumber.java.Scenario)	FAILED	0.247 s
	org.openqa.selenium.WebDriverException: chrome not reachable (Session info: chrome=99.0.4844.82) Build info: version: '4.0.0-rc-1', revision: 'bc5511cbda' System info: host: 'INMUVADP016372', ip: '10.1.47.119', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [f322267c8617356d26272596f326c6c9, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 99.0.4844.82, chrome: {chromedriverVersion: 98.0.4758.80 (7f0488e8ba0d8..., userDataDir: C:\Users\ININDC~1\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:57767}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:57767/devtoo..., se:cdpVersion: 99.0.4844.82, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: f322267c8617356d26272596f326c6c9 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:164) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:139) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:547) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:606) at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:432) at stepdefinitions.HooksClass.TearDown(HooksClass.java:52)		