

MOSQUITO SPECIES CLASSIFICATION FOR DISEASE PREVENTION: A BANGLADESHI DATASET STUDY

Azim Pial (2023200000601) • Naima Sultana (2023200000636) • Wahid Imtiaz Arnob (2023200000616) • Md. Shahadat Hossan (2023200000599)

Department of Computer Science & Engineering, Southeast University, Dhaka, Bangladesh

Supervisor: Mahdin Mahboob, Assistant Professor, CSE, Southeast University

Introduction

In recent years, mosquito-borne diseases have become an increasingly serious global health problem. Of more than 3,700 mosquito species worldwide, only a small subset act as disease vectors. However, this small group account for most vector-borne infections: Aedes mosquitoes commonly transmit dengue, Anopheles transport malaria, and Culex linked to West Nile and other viral diseases. The WHO reported over 14.4 million dengue cases globally in 2024, while the World Malaria Report 2025 estimated 282 million malaria cases and roughly 610,000 deaths worldwide. The country experienced its worst dengue outbreak in 2023, with 321,179 reported cases and 1,705 deaths [3]. In addition to spending at least Tk5,476 crore annually on mosquito prevention, Bangladesh faces high dengue treatment costs averaging BDT 33,817 per household, alongside BDT 6,076 per patient spent directly by public hospitals.

Problem Statement

Timely, accurate species identification is essential for disease prevention and localized vector control. However, following traditional identification, even trained experts misidentify adult mosquitoes roughly 18% of the time [4]. Similarly, DNA-based techniques improve accuracy but require expensive laboratory infrastructure. Convolutional Neural Networks (CNNs) offer a scalable, cost-effective alternative for species recognition, but most studies rely on generic and foreign datasets that do not reflect the distinct morphological and ecological characteristics of Bangladeshi mosquito populations.


AMID V1 Balanced Subset – 2,000 images · 4 classes · 500 per class



Aedes albopictus
n = 500



Culex pipiens
n = 500

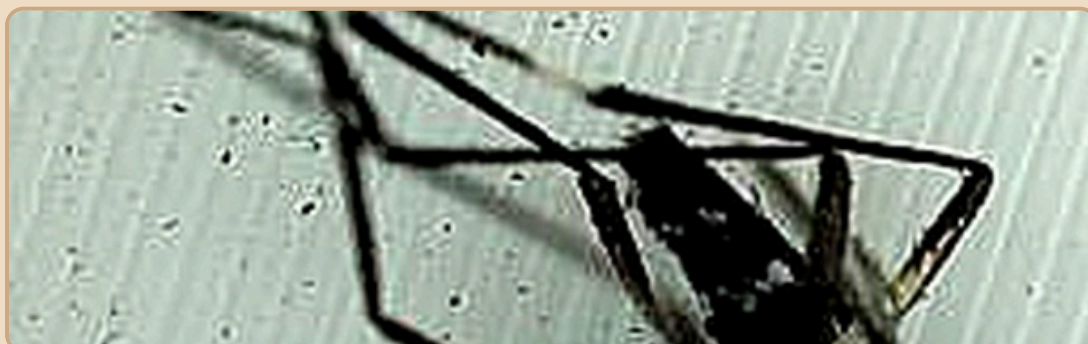

Aedes aegypti
n = 500



Cx. quinquefasciatus
n = 500

Aim: Benchmark four CNN architectures on a **balanced 4-class subset** of the AMID V1 Bangladeshi mosquito dataset and demonstrate that careful class selection and dataset balancing are critical for reliable species-level classification.

Methods

Three ImageNet-pretrained CNN backbones – ResNet50, EfficientNetV2-S, and VGG16 – were fine-tuned on a balanced 2,000-image AMID V1 subset (4 classes, 500 each) using stratified 70/15/15 train-validation-test splits on Google Colab.

Protocol

- Two-stage transfer learning: frozen backbone → partial unfreeze with cosine decay LR
- Data augmentation: flip, rotate, zoom, brightness adjustment
- Metrics: Accuracy, Macro Precision, Recall, F1, ROC-AUC

Result

Among the three architectures evaluated on the balanced 4-class AMID V1 dataset, fine-tuned EfficientNetV2-S achieved the best overall performance, with test accuracy reaching 92.00% and macro-F1 at 91.93%. VGG16 showed the most dramatic improvement with test accuracy rising from 52.67% baseline to 83.33% after fine-tuning and macro-F1 improving from 42.88% to 82.97%. ResNet50 achieved 77.67% accuracy with strong ROC-AUC of 96.01% but the least gain from fine-tuning.

Training & Validation Curves

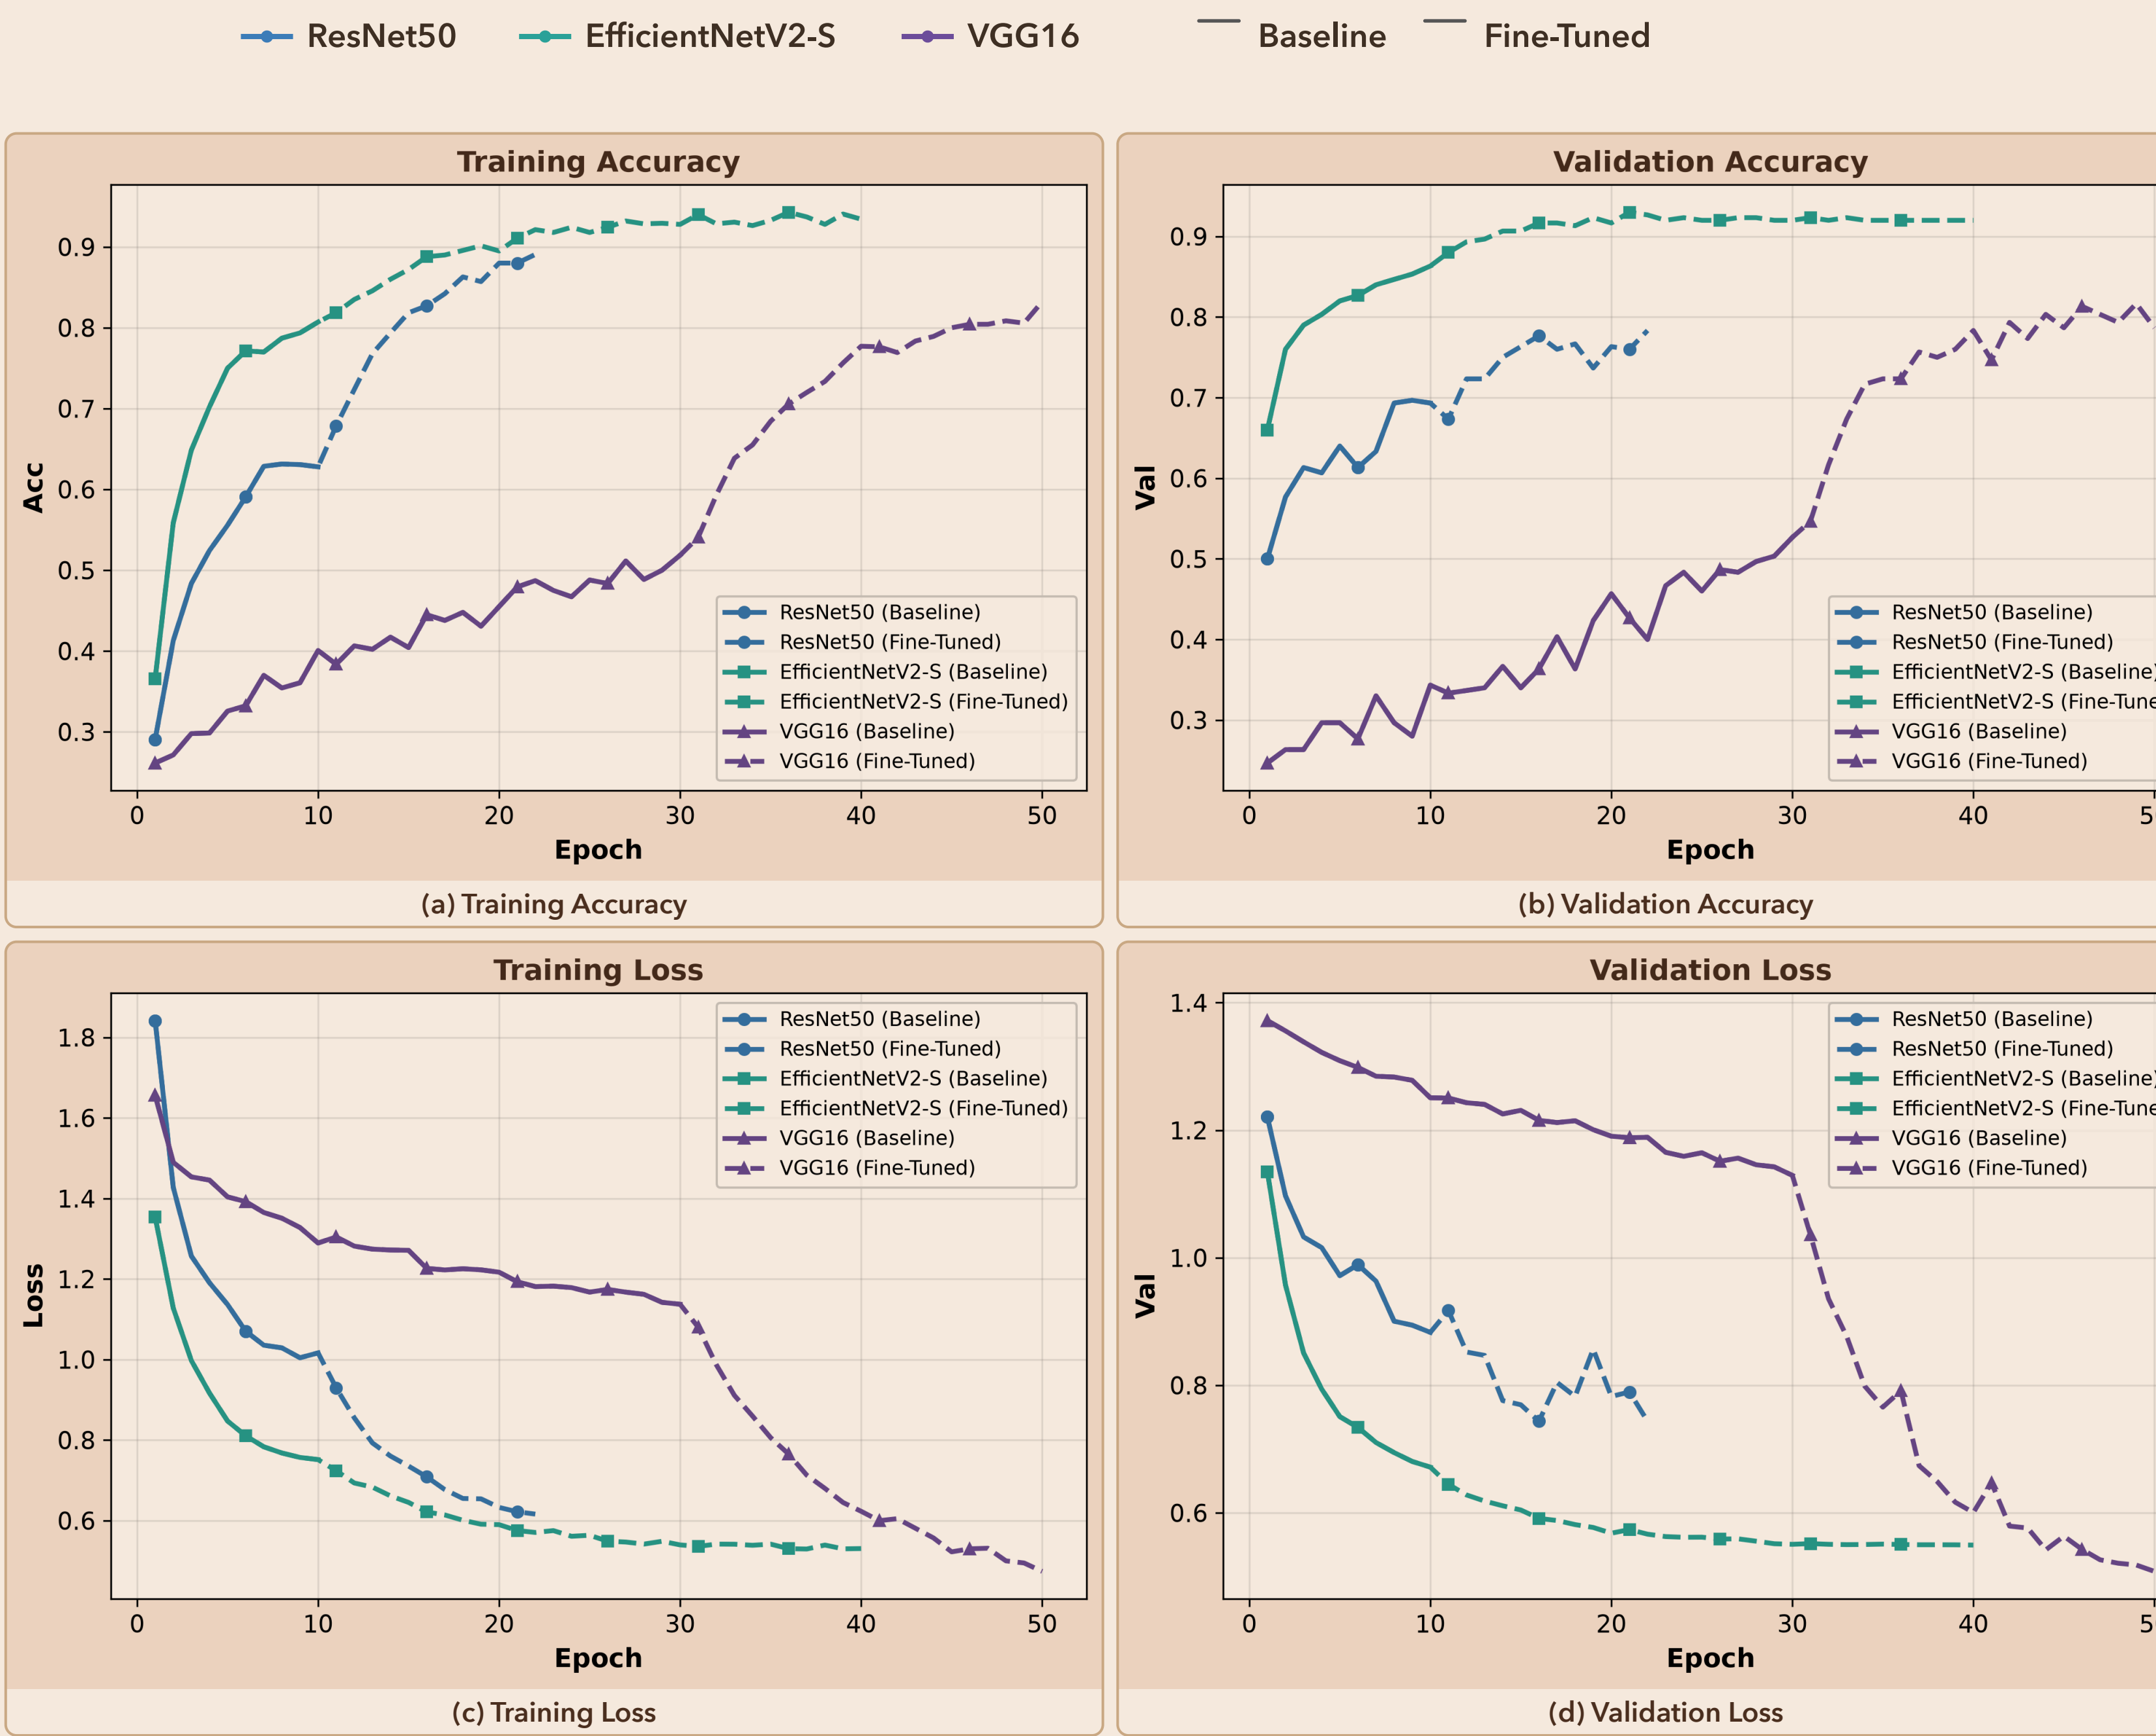


Figure 2: Baseline (epochs 1-10) and fine-tuned (epochs 11+) phases. Solid = baseline, dashed = fine-tuned.

Accuracy & Training Time Comparison

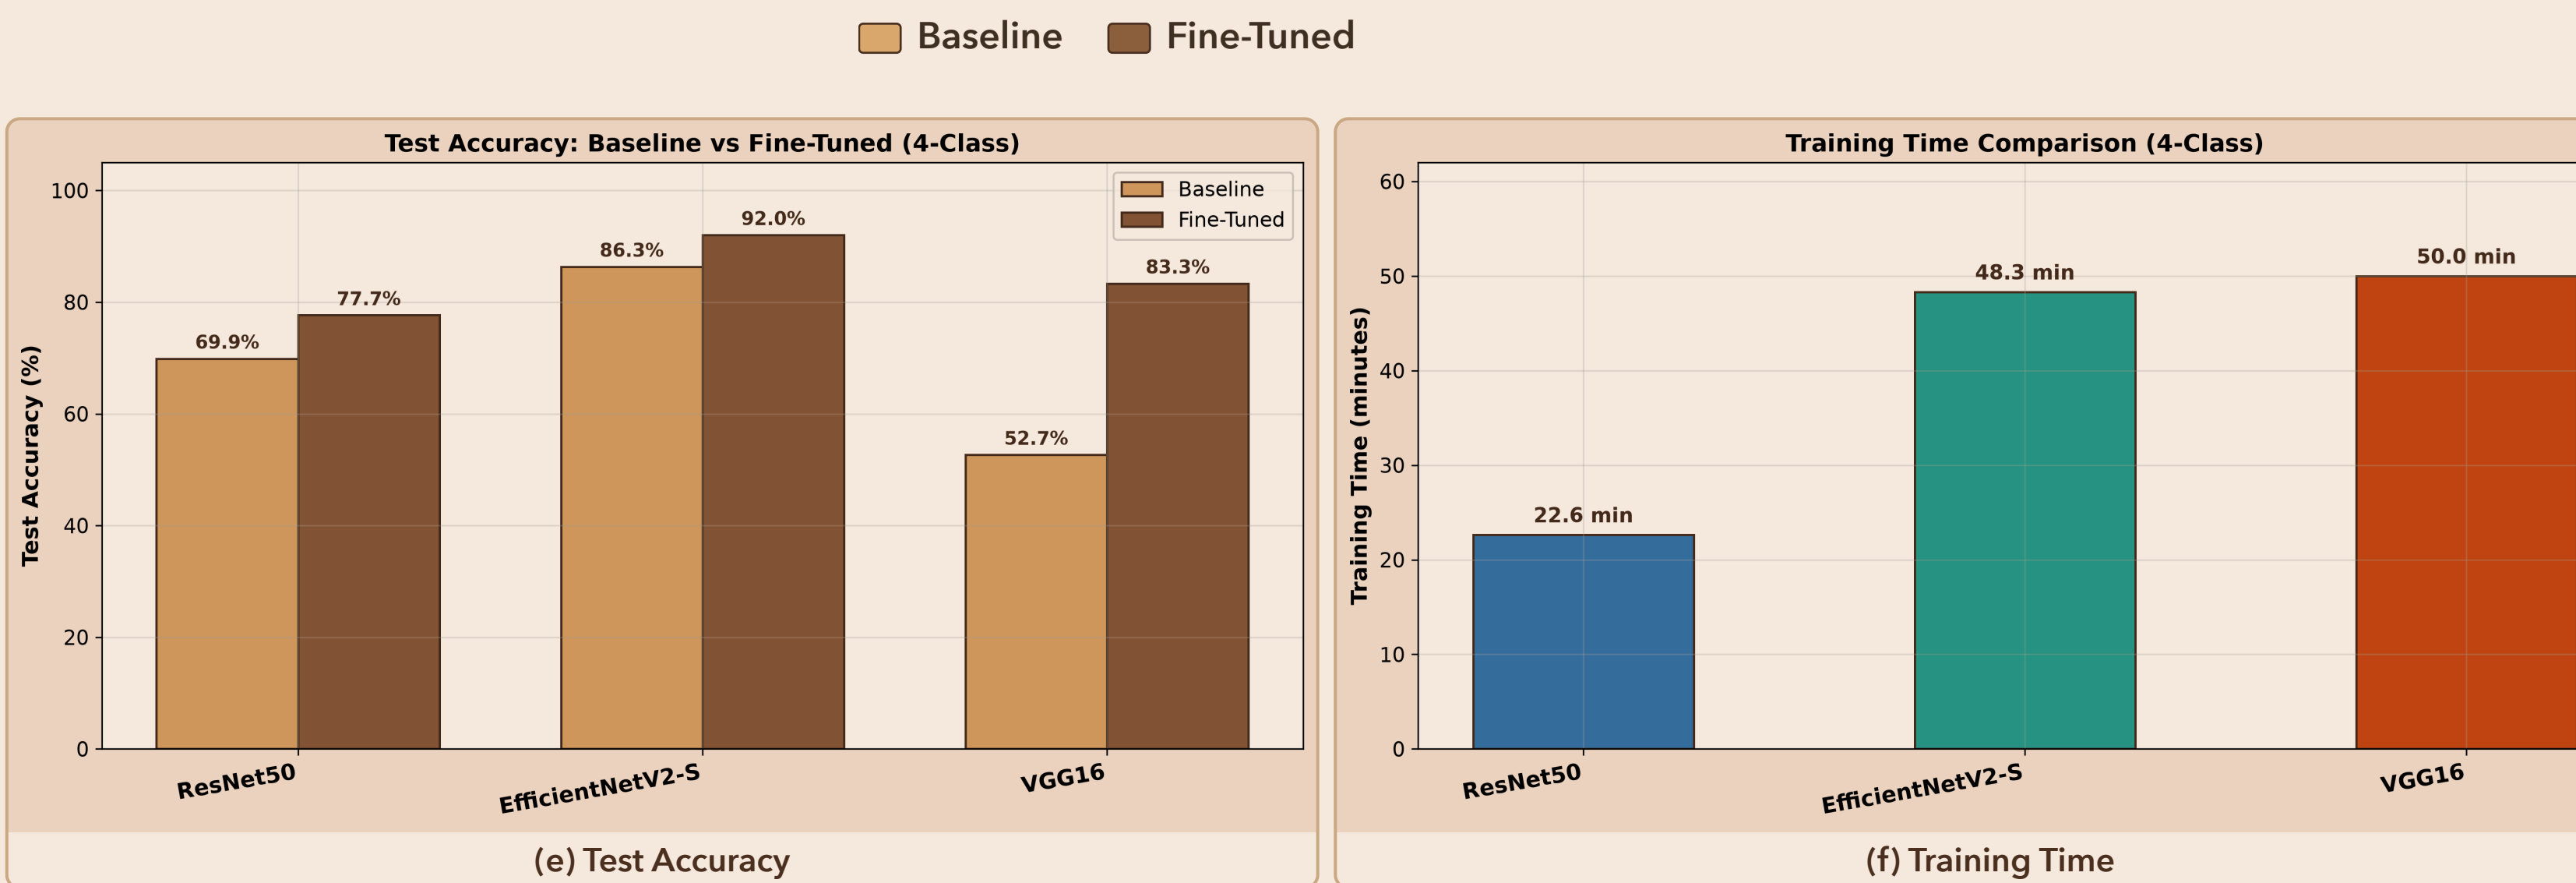


Figure 3: (e) EfficientNetV2-S achieves the highest fine-tuned accuracy at 92.0%. (f) All models trained in under 71 minutes total.

Classification Performance Summary

Model	Base Acc.	FT Acc.	Base F1	FT F1	AUC
ResNet50	69.87%	77.67%	68.44%	76.53%	0.9601
EfficientNetV2-S	86.33%	92.00%	85.96%	91.93%	0.9932
VGG16	52.67%	83.33%	42.88%	82.97%	0.9620

Table 1: Baseline (B) vs. Fine-Tuned (FT). EfficientNetV2-S achieves highest accuracy and macro-F1 after fine-tuning.

Limitation/Future Work

- The study was limited to only four species from a single dataset (AMID V1); cross-dataset generalization remains untested.
- Computational resources restricted experiments to three architectures; deeper models were not explored.
- Explore focal loss, class-weighted loss, and oversampling to handle imbalance
- Develop lightweight architectures for on-device deployment in smart traps
- Extend to multi-modal surveillance: image + acoustic + environmental signals

Conclusion

This comparative benchmark advances local disease vector identification through cost-effective, AI-driven surveillance and empowers public health authorities with earlier outbreak detection. Ultimately, it expands the frontier of medical AI innovation by demonstrating how deep learning can tackle high-impact public health challenges in resource-constrained environments.

References

- WHO, “Dengue - global situation,” *World Health Organization*, 2024. [Online]. Available: <https://www.who.int/news-room/fact-sheets/detail/dengue-and-severe-dengue>
- WHO, *World Malaria Report 2025*. Geneva: World Health Organization, 2025.
- DGHS, Bangladesh, *National Dengue Situation Reports 2023*. Dhaka: Directorate General of Health Services, 2023.
- T. Balenghien et al., “The current status of mosquito-borne diseases in Europe and the role of mosquitoes as vectors,” *Parasites & Vectors*, vol. 11, no. 1, pp. 1-12, 2018.

QR code
to be added

