

Input String:

0	a, sylhet
1	recor, Uttara
2	
3	


Badda

dhaka 405

A scatter plot for Khulna showing a positive linear trend. The x-axis is labeled 'khulna'. There are two data points, both labeled 'Badda', located at approximately (10, 10) and (20, 15). A line of best fit is drawn through these points, starting near (0, 5) and ending near (30, 25).

0	b, mirpur
1	
2	
3	

mohakhali

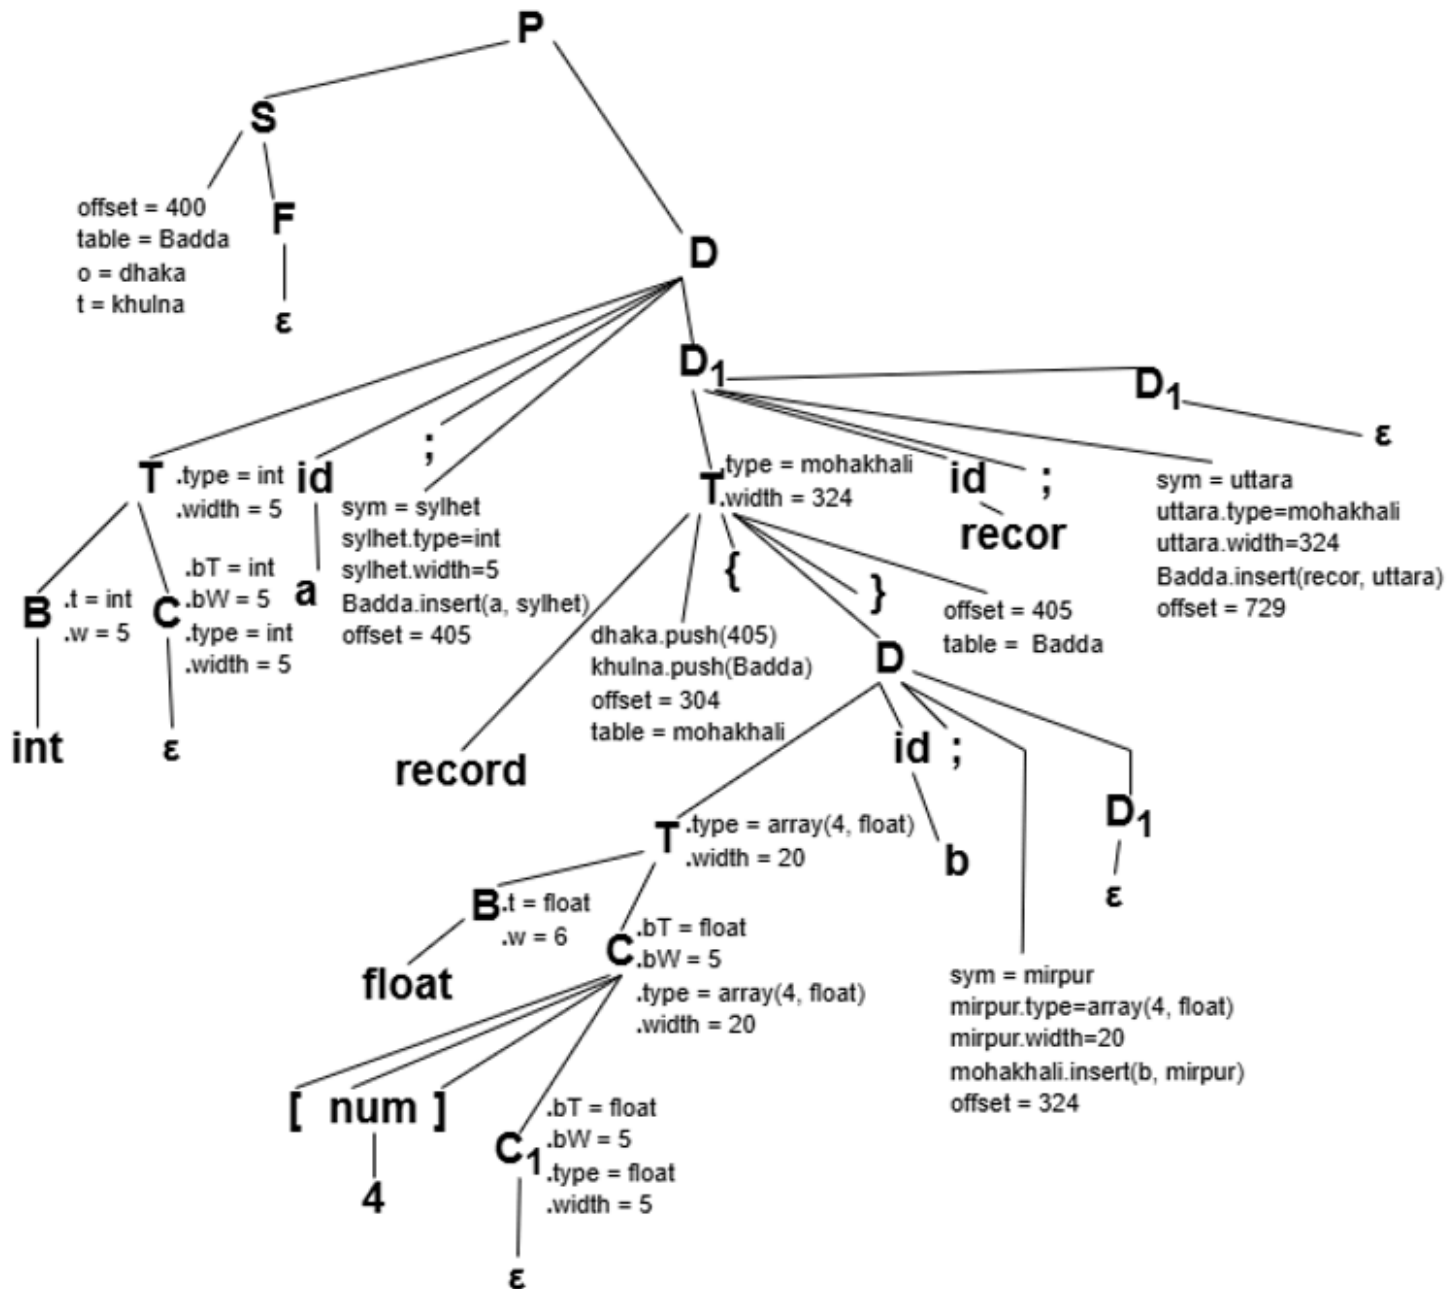


Input String:

0	b, utara
1	recor, sylhet
2	
3	

0	
1	
2	
3	

0	
1	
2	
3	

0	c, mirpur
1	
2	
3	

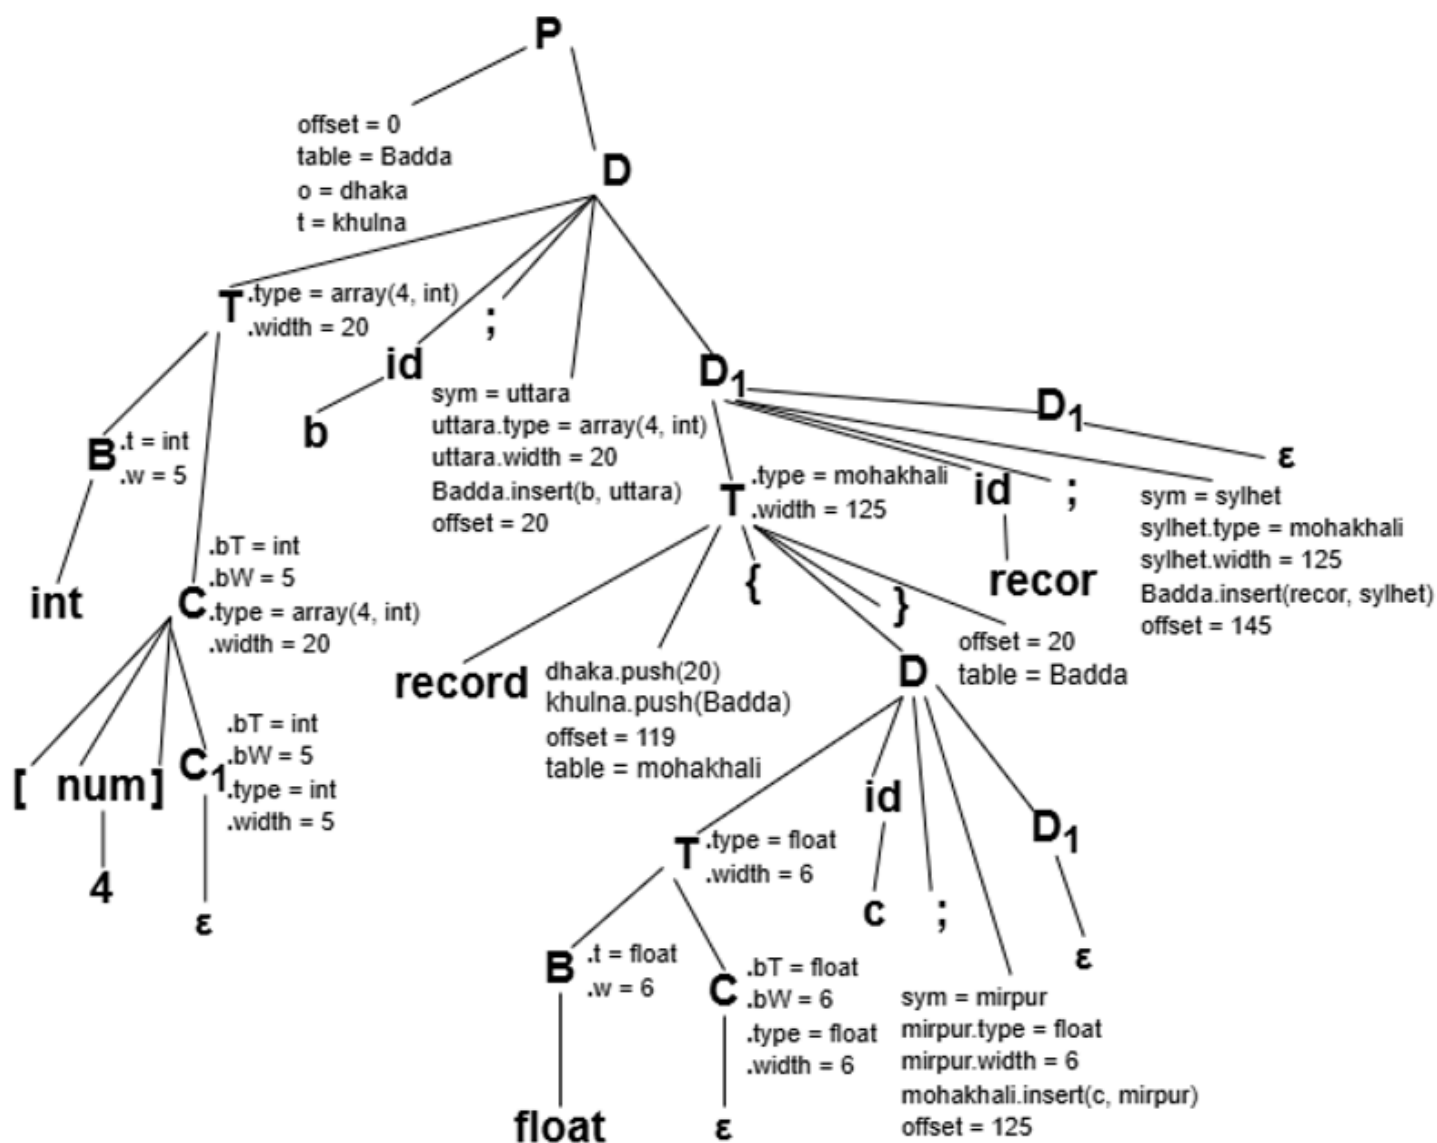

1.

Input String:

```
record {
  float c;
} rer;
int [4] b;
```

0	rer,uttara
1	b,mirpur
2	
3	

Badda

0	
1	
2	
3	


dhaka

0	
1	
2	
3	

khulna

0	c,sylhet
1	
2	
3	

mohakhali

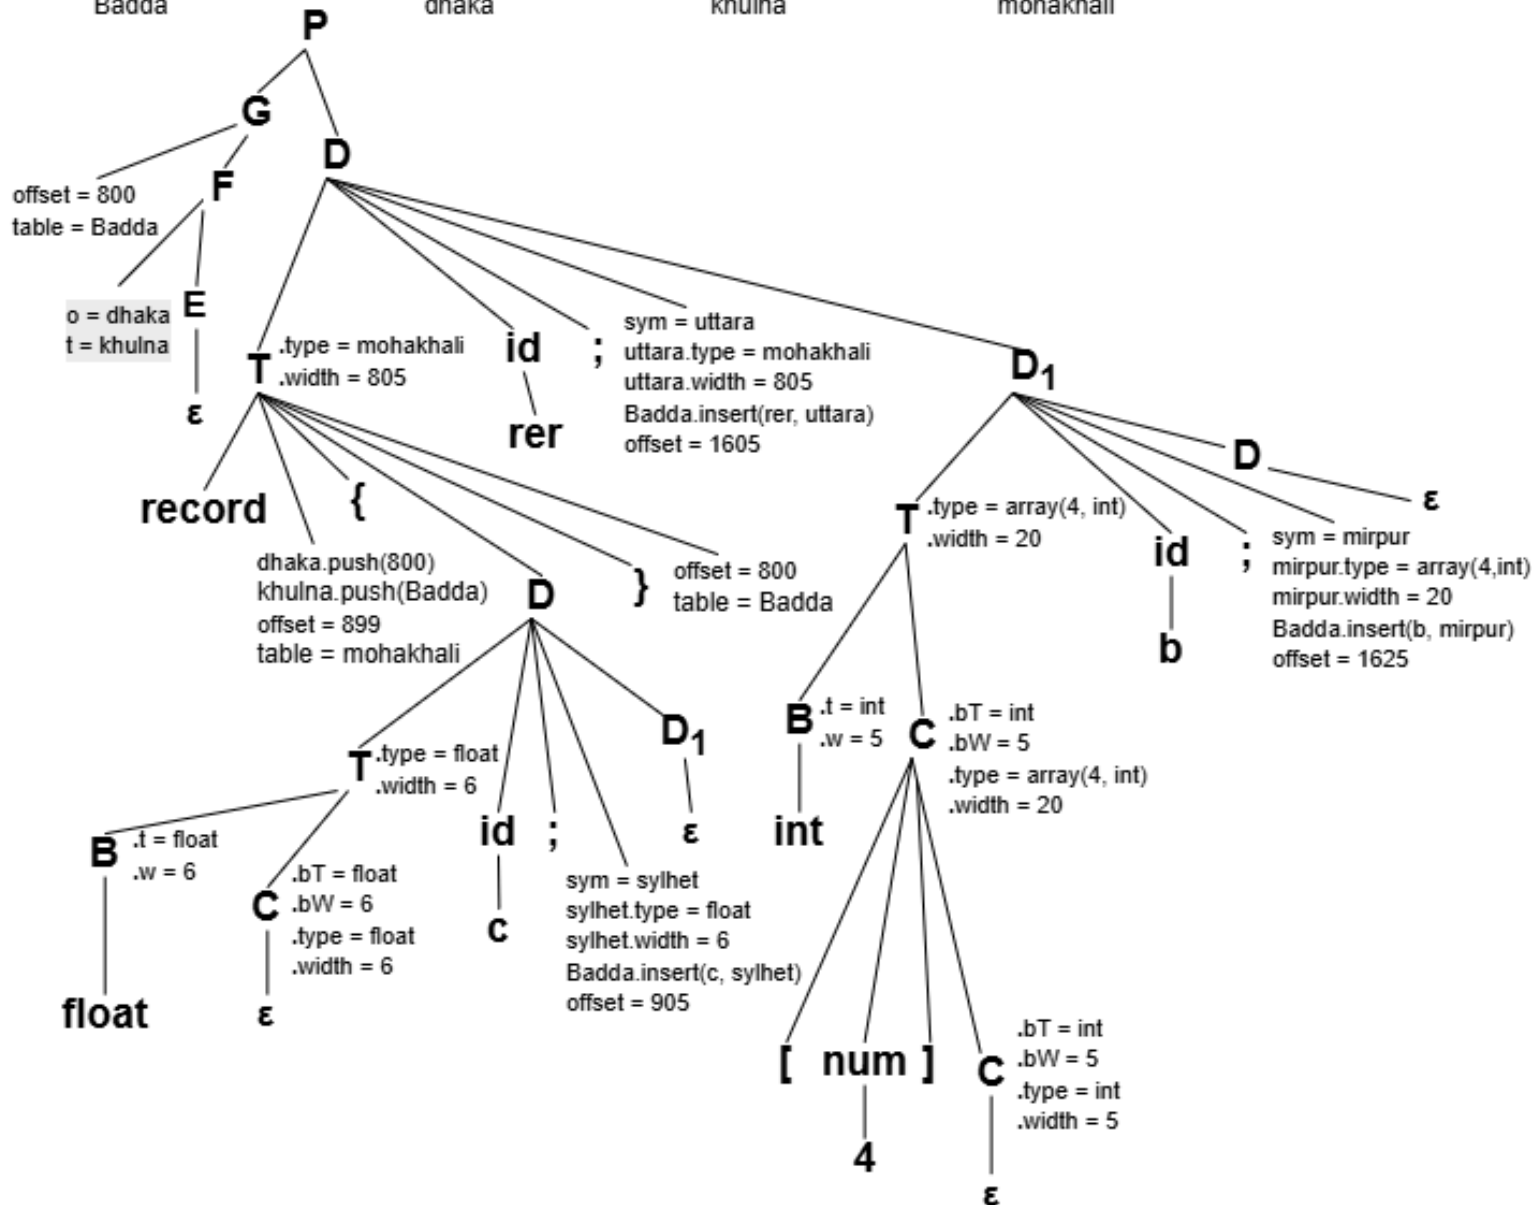

```
float [2] [3]c;
record {
    } r;
```

0	c,uttara
1	r,sylhet
2	
3	

Baada

0	
1	
2	
3	

The diagram illustrates a parse tree for the sentence "Badda o dhaka t khulna". The root node **P** branches into **S** and **D**. Node **S** branches into **offset** (value 100), **table** (value Badda), **o** (value dhaka), and **t** (value khulna). Node **D** branches into **T**, **;**, and **D₁**. Node **T** branches into **B** and **C**. Node **B** branches into **float**. Node **C** branches into **[num]** and **C₁**. Node **[num]** branches into **2**. Node **C₁** branches into **[num]** and **C₂**. Node **[num]** branches into **3**. Node **C₂** branches into ϵ . Node **D₁** branches into **T**, **id**, **;**, and **D₁**. Node **T** branches into **record**, **dhaka**, **khulna**, **offset** (value 136), and **table** (value Badda). Node **id** branches into **r**. Node **D₁** branches into ϵ . The diagram includes various annotations like **.type**, **.width**, **.bT**, **.bW**, and **.type = array(2, array(3, float))**.