

UML Diagrams

Ref: Whitten et al, *Systems Analysis and Design Methods* 7e. McGraw-Hill Higher Education


Key Ideas

- Introduction to UML diagrams
- Use case diagram
- Sequence diagram
- Activity diagram

UML diagram

- Stands for Unified Modeling Language
 - A language with notion which can be understand by all the parties involved with software
- Initiated by Rational Software in 1994-95
- Popular tools –
 - Rational Rose
 - Microsoft Visio
 - Draw.io

Different Types of UML

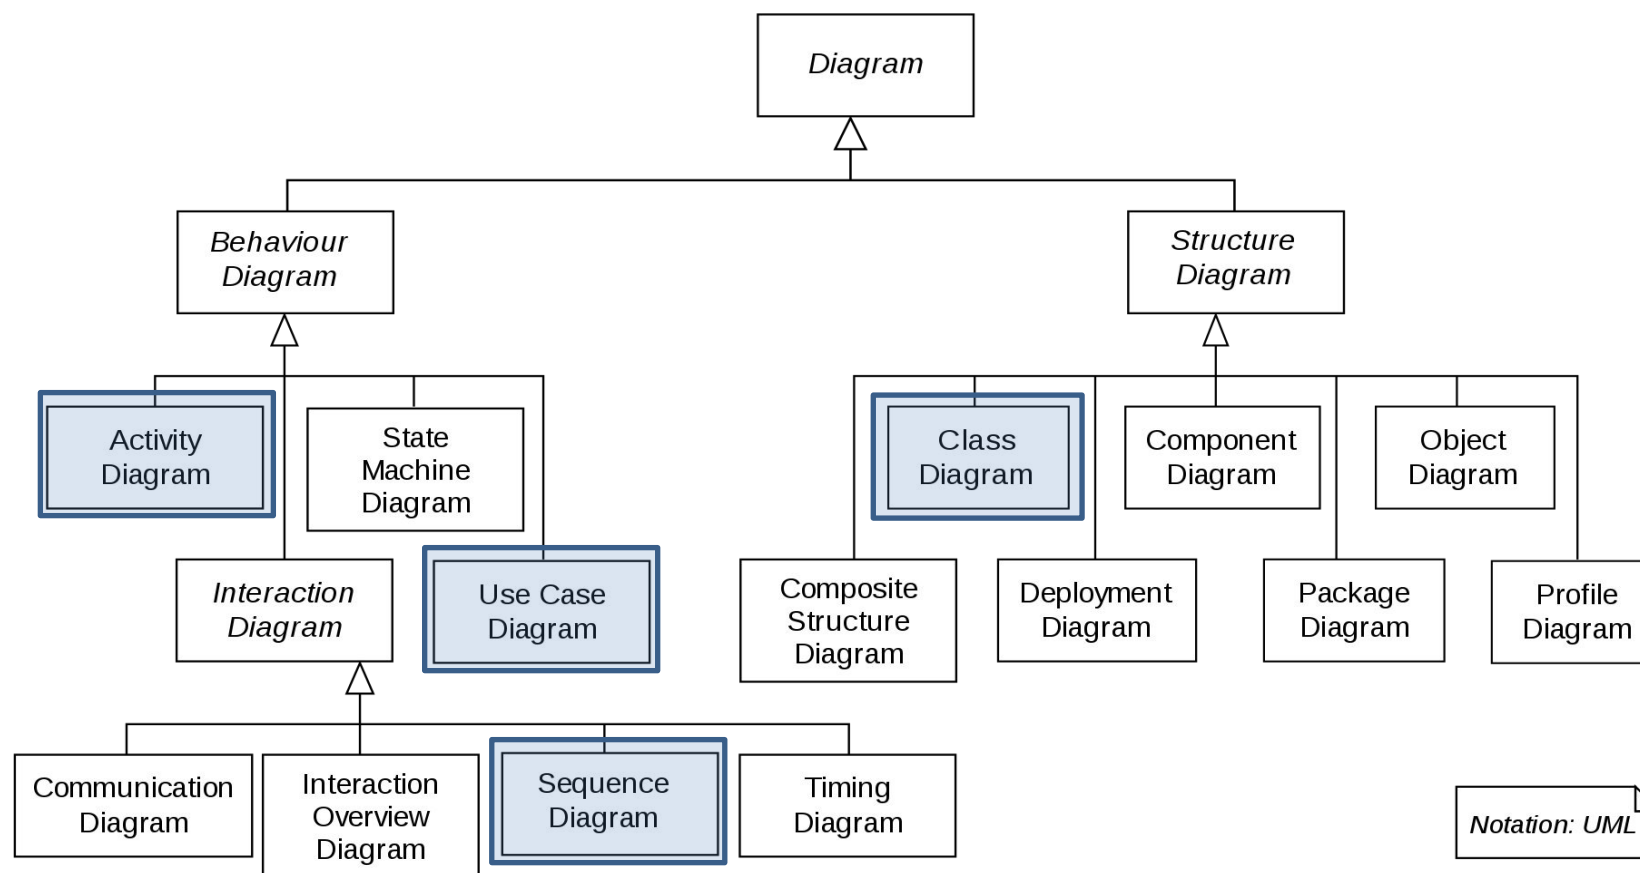

Use case diagram

What is Use Case ?

- Use case diagrams considers mostly as a requirement analysis tool
- It identifies the uses of the system based on a case
 - Use indicates the actions
 - Case indicates the action linked with actor (who performs the action)
 - All the action verbs mentioned in requirement specification is an use case in this diagram
- To draw the use case diagram, one need to
 - Identify all the entity who will performs action
 - And all the actions needed to support by the system

Components of Use Case diagram

- Use case diagram is composed of four components

- Actor
- Use case
- System boundary
- Relations

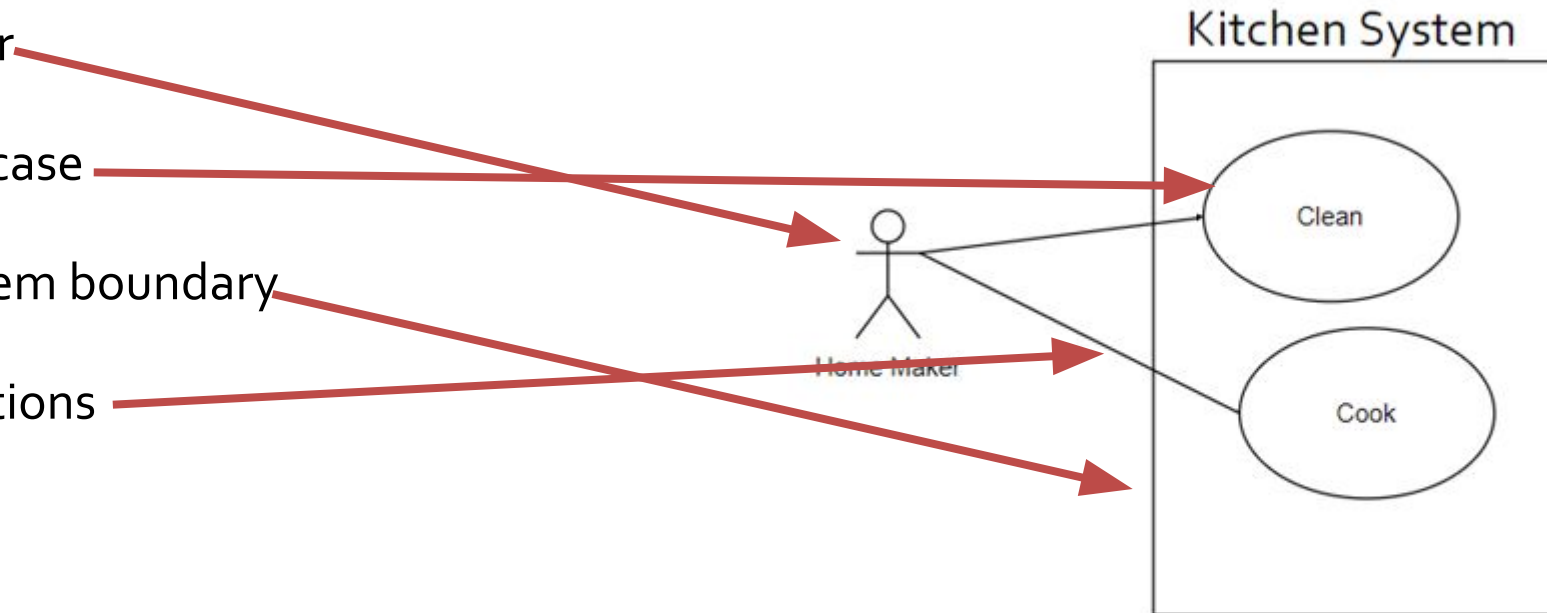


Figure: Example Use Case diagram

Actor

- The entity which performs the actions or roles in the system
- Actor is responsible for giving input to the system
- Responsible to use processed output for performing particular action
- Actor must be connected with at least one use case
 - Primary actor
 - Secondary actor
 - External hardware
 - Other System

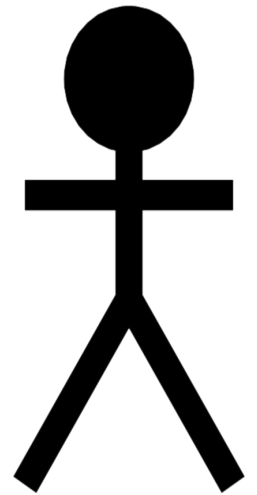


Figure: Actor in Usecase

Types of Actor

Primary actor

- People who performs the main system functions.
- For example **rider** of a ride sharing system. As s/he is requesting for ride, or paying the money using the system.

Secondary actor

- People who performs the administrative functions.
- For the aforementioned system a **manager** who sets the discounts is an example of Secondary actor.

Types of Actor (cont.)

External hardware

- Any external hardware device which is a part of the application.
- If the system using **amazon datastore** as their database.

Other System

- Any external system which has interaction with the current system.
- **Payment gateway** is an example of such actor.

Use Cases

- Indicates the system functions performed by an actor
- It can also describes the sequence of actions in a system
- Every Use case must have a unique name
- Use case must be started with principal verb
- Use cases in the diagram must be enclosed by the system boundary
- Every Use case should be connected with either actor or another use case

Must be represented by an ellipse

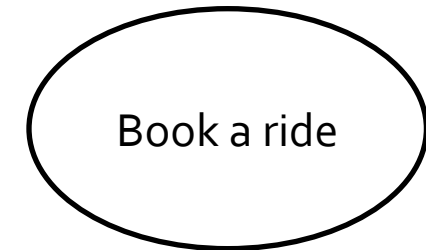


Figure: An Use case

System Boundary

- Shows how the system interacts with the user
- Class in which use case are executed
- Represented by the use cases within a rectangle and actors will outside of the system boundary




Figure: The system boundary of Use case

Relation

- Also Known as by communication line
- It represents the connection between any two components of use case diagram
- Can be of three types
 - Association
 - Generalization
 - Dependency

Association

- Connects an actor with the use case
- Identifies the actor(s) are responsible/user of the use case
- Represented by a straight solid line
 - No arrow
 - Not dashed or curved line
- A actor must have at least one association in the diagram
- An use case can be associated with zero or more actors

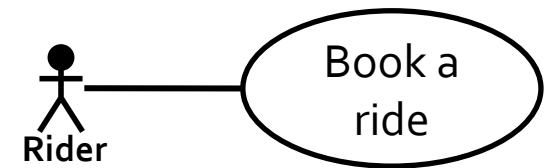


Figure: association between an actor and an use case

Generalization

- Represents the parent-child relation
- Represented by a straight line with hollow arrow
- Can indicate the relation between
 - Either **Actors**
 - Or **Use cases**

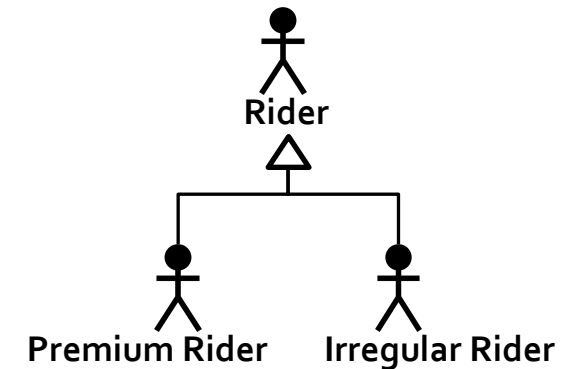


Figure: Generalization relation between actors

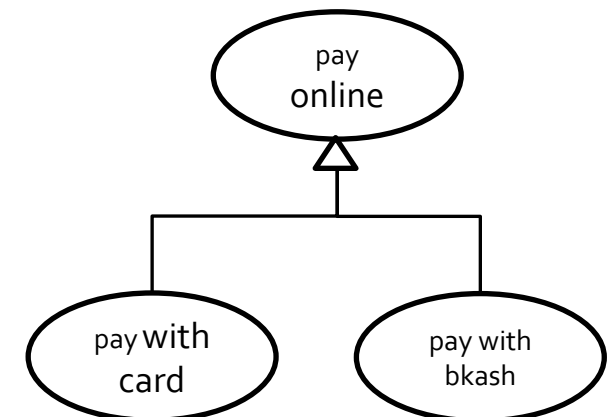


Figure: Generalization relation between use cases

Dependency

- Indicates the dependency relationship between two use cases.
- Two types of dependencies : Include & Extend
- **Include relationships**
 - One use case (base) includes the functionality of another (inclusion case)
 - Supports re-use of functionality
- **Extend relationships**
 - One use case (extension) extends the behavior of another (base)

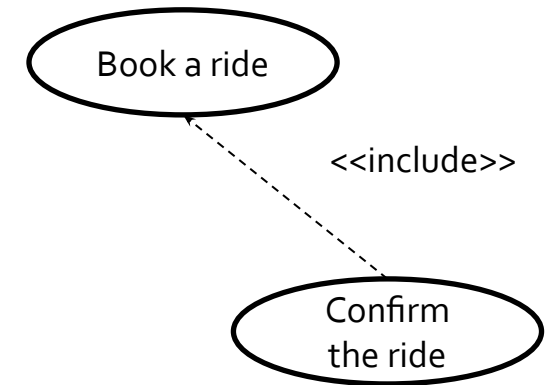


Figure: Include relation

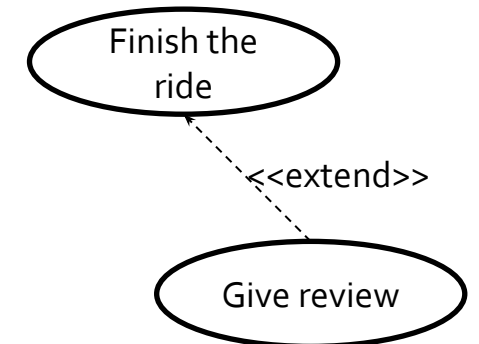


Figure: extend relation

Dependency

Arrow Position

- The arrow should be placed with the use case which will complete first.
 - In first example, You need to book a ride first then you can confirm. So the arrow is with book a ride.
 - in second example, You need to finish the ride first then you can give review or not. So arrow is with Finish the ride.

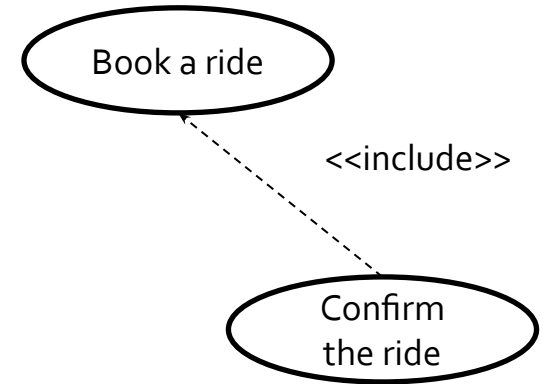


Figure: Include relation


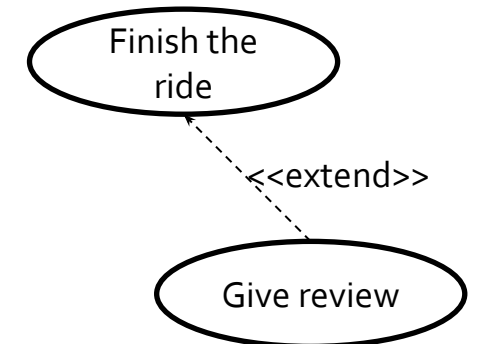


Figure: extend relation

Use case example 1 : Purchasing an item

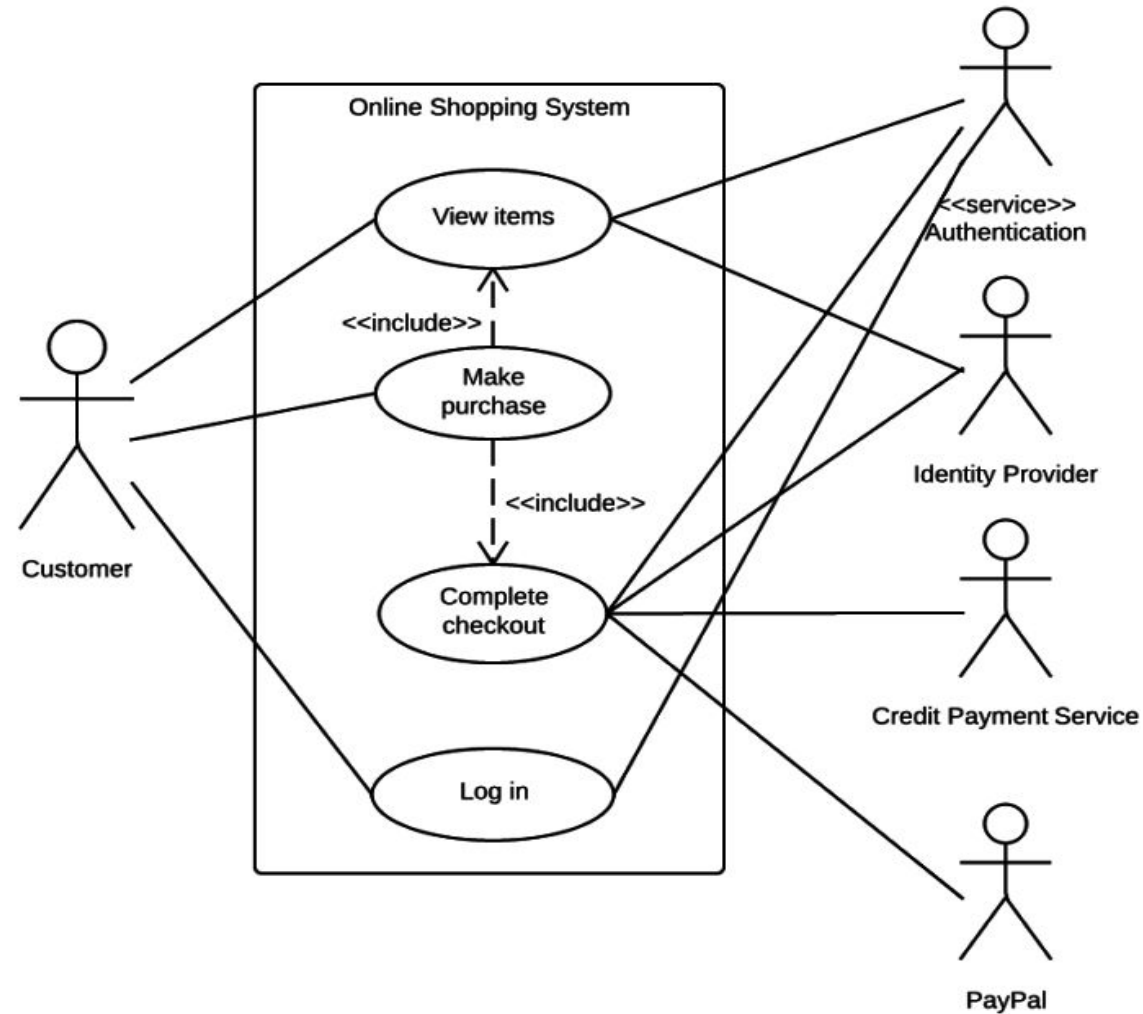

How to Create a Use Case Diagram

1. **Identifying Actors**
2. **Identifying Use Cases**
3. **Look for Common Functionality to use Include**
4. **Is it Possible to Generalize Actors and Use Cases**
5. **Optional Functions or Additional Functions**

How to Create a Use Case Diagram

Identifying Actors

Customer

Bank employee

NFRC Customer




How to Create a Use Case Diagram

Identifying Use Cases


- A good way to do this is to identify what the actors need from the system
- A customer will need to
 1. open accounts
 2. Deposit funds
 3. withdraw funds
 4. request check books

How to Create a Use Case Diagram

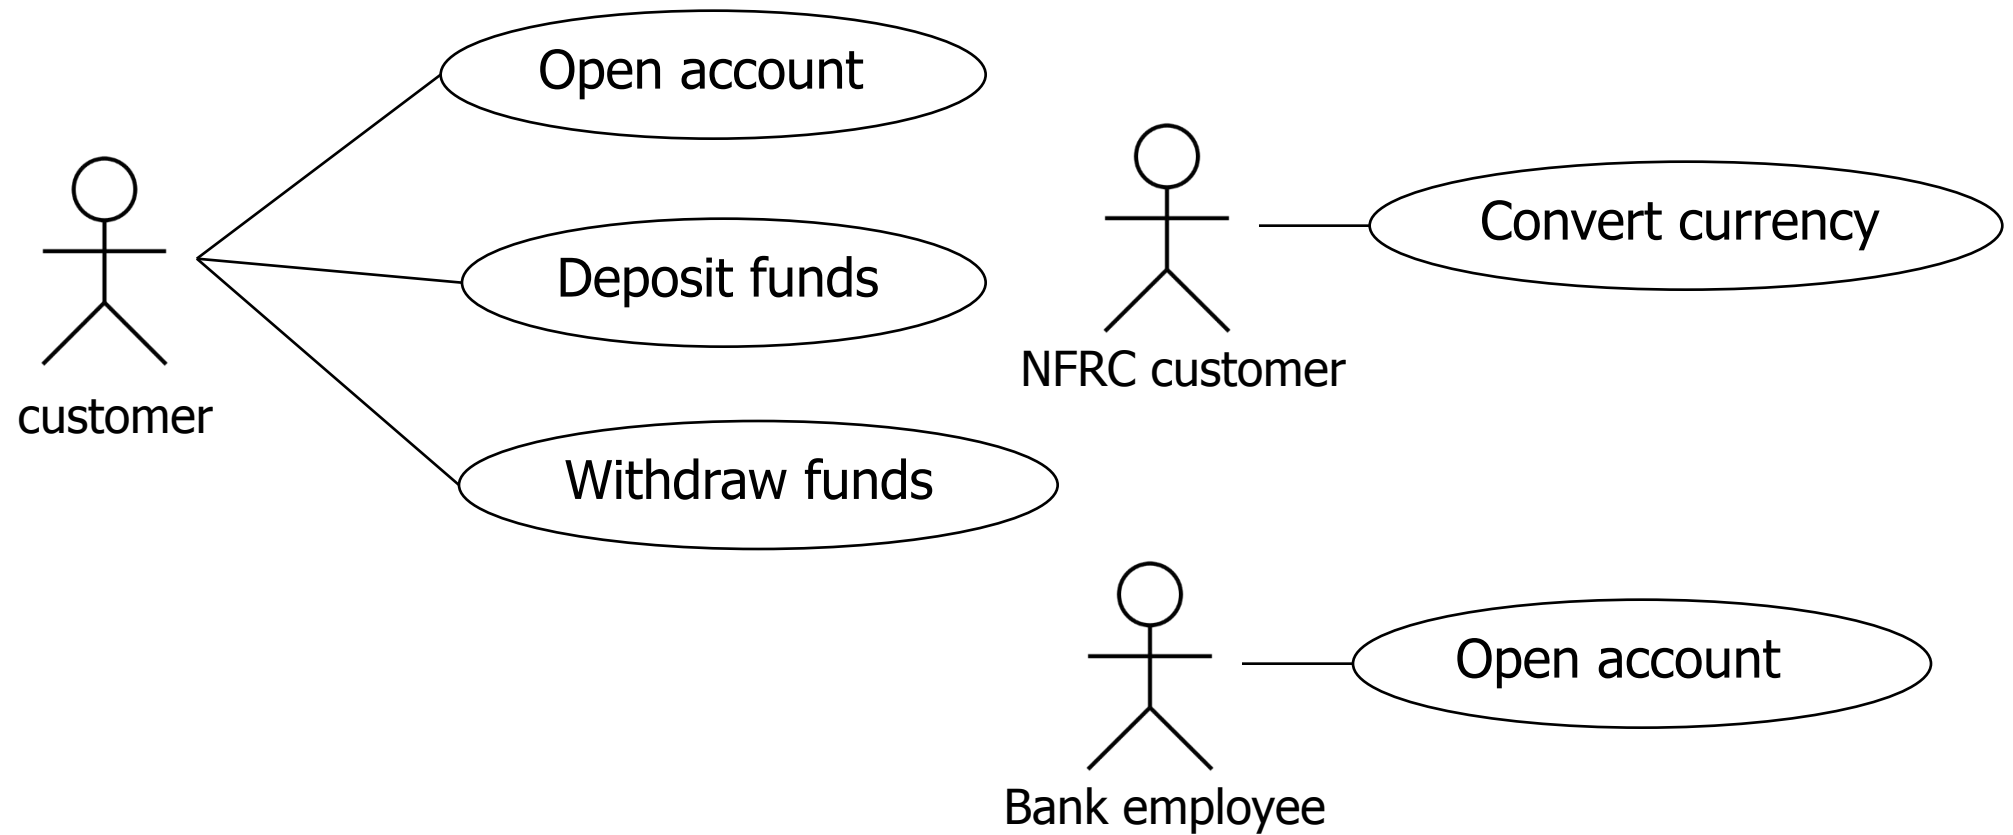


How to Create a Use Case Diagram

- **Look for Common Functionality to use Include**
 - find two or more use cases that share common functionality

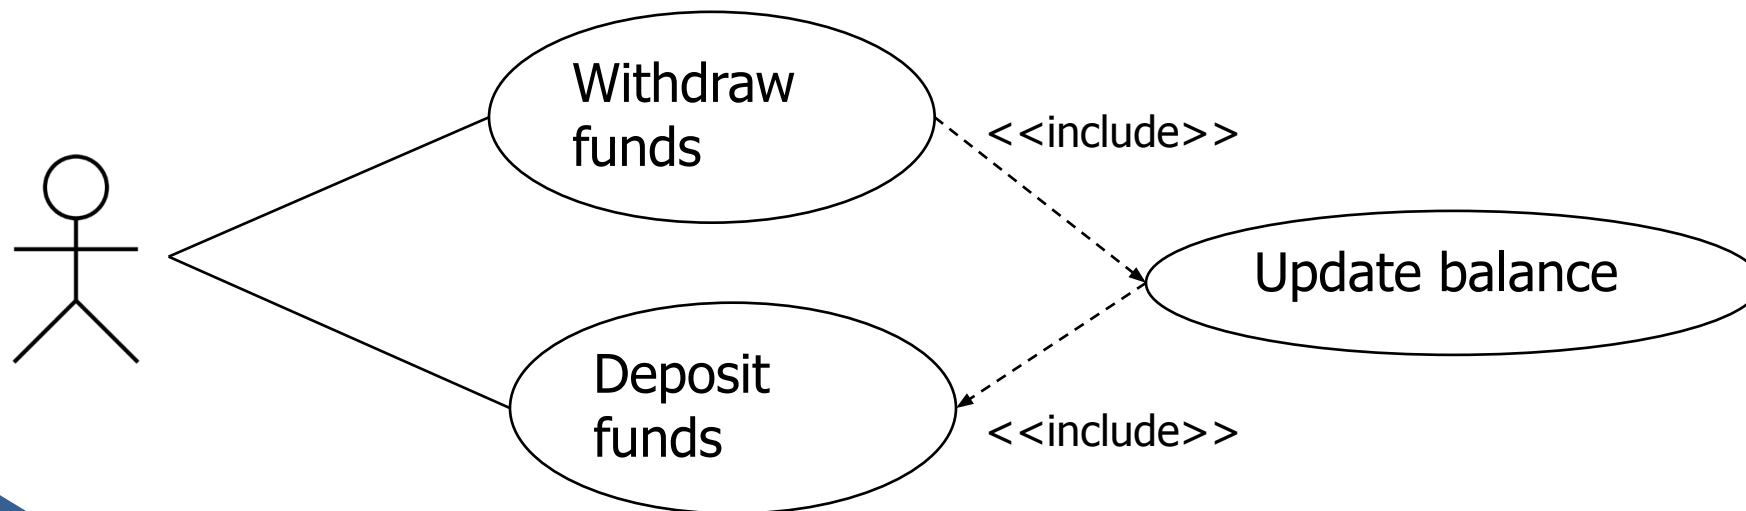

How to Create a Use Case Diagram


- Is it Possible to Generalize Actors ?

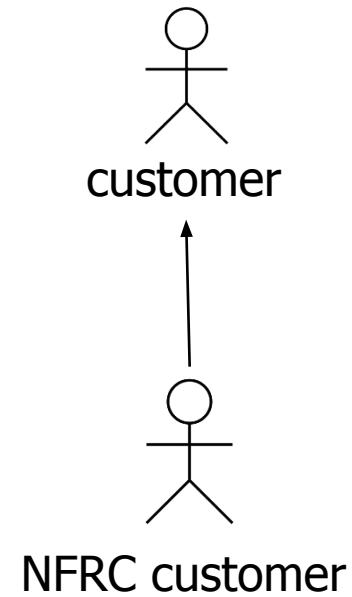


How to Create a Use Case Diagram

- **Optional Functions or Additional Functions**

- There are some functions that are triggered optionally

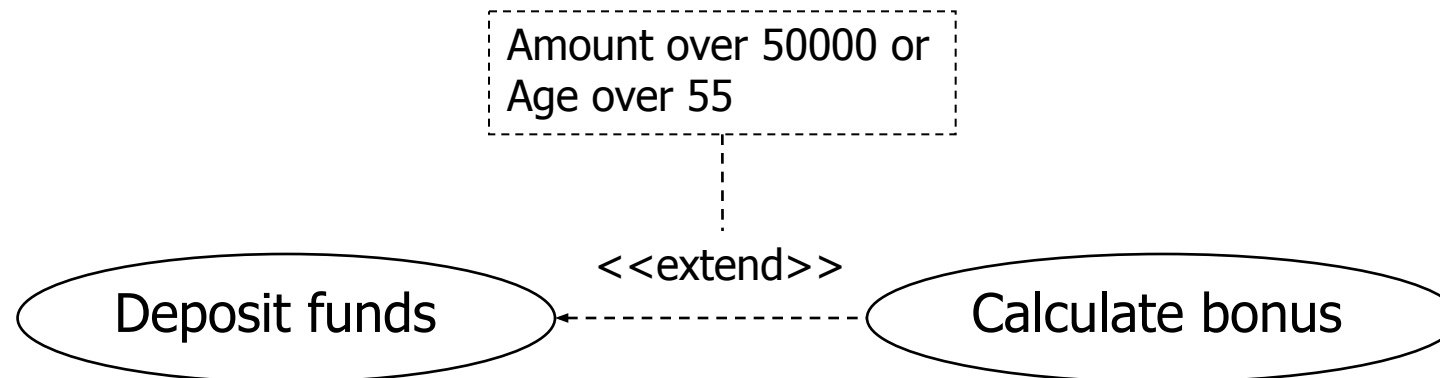

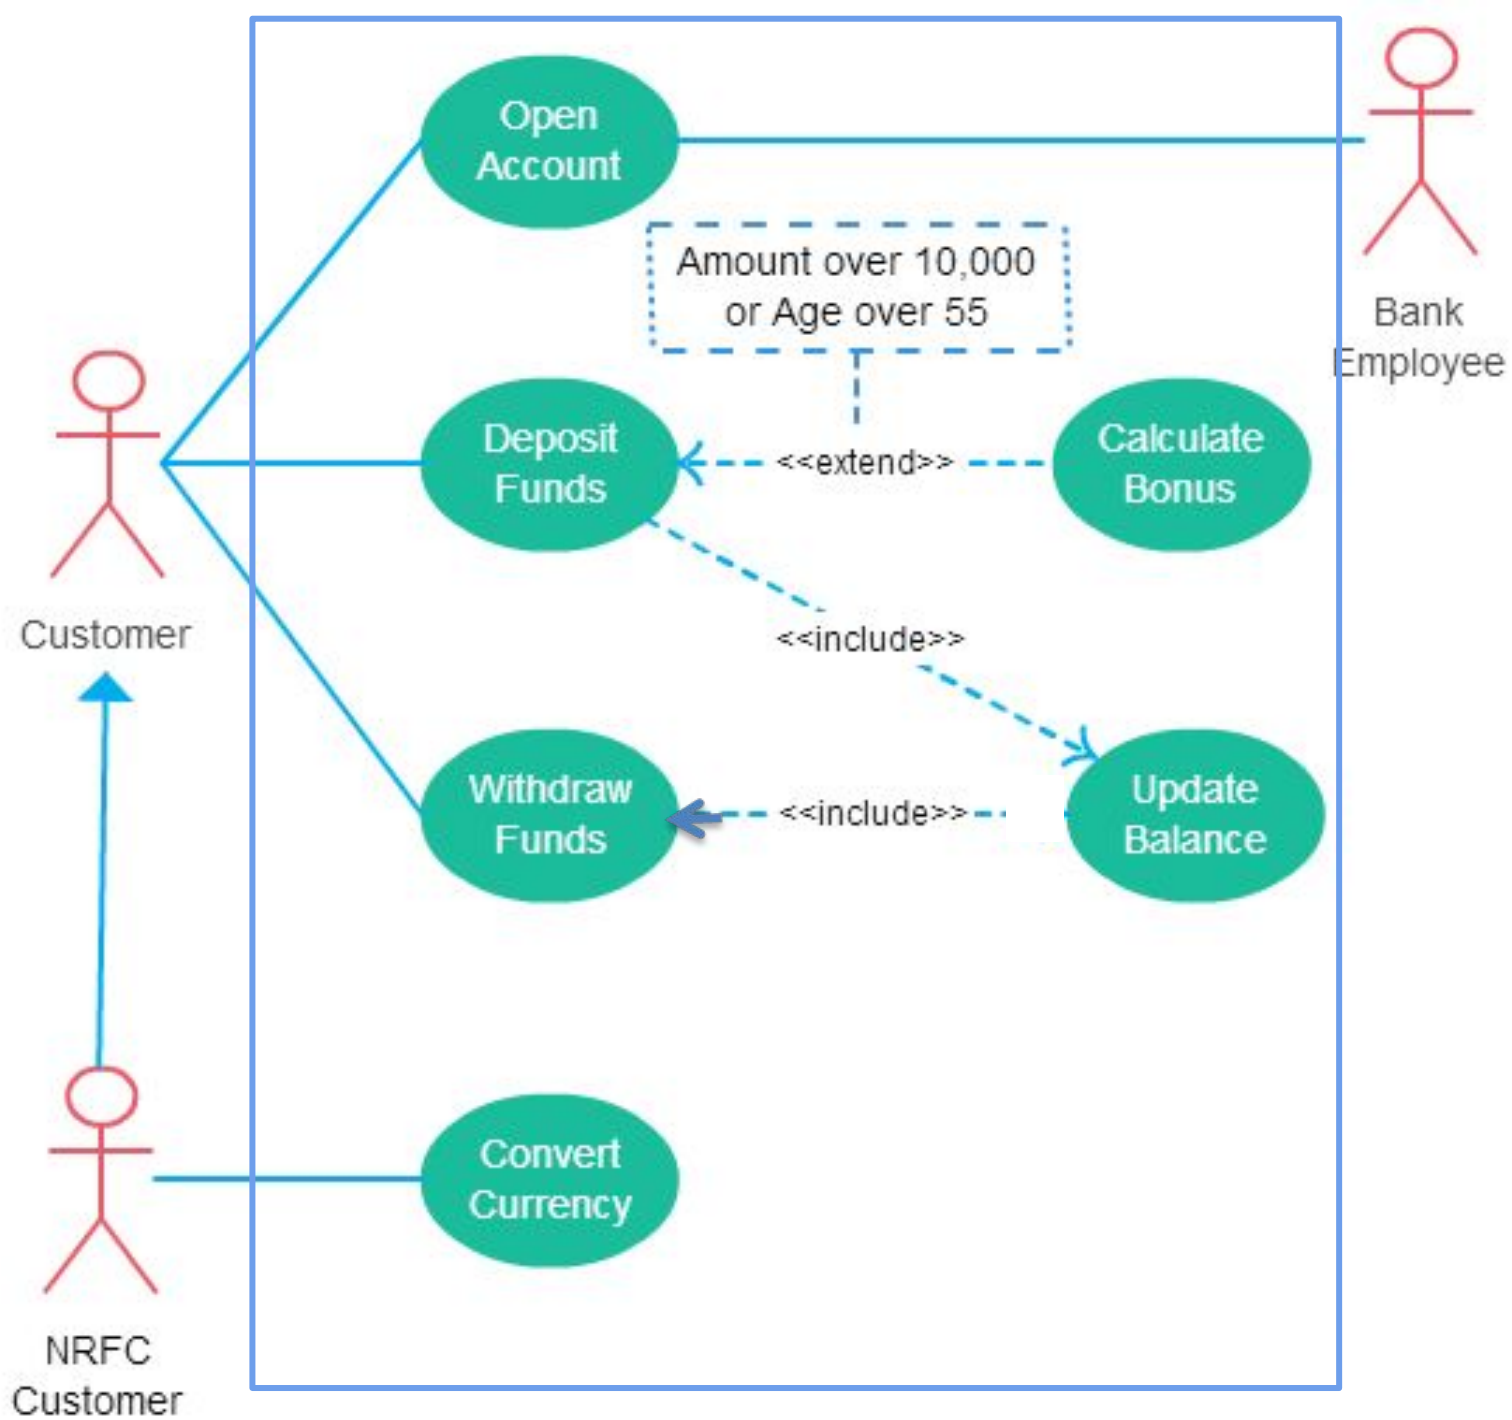

Use case Description

- Every use case diagram must have its description
- Usually description is presented in tabular form
- The diagram should have a unique id
- Typically the description form include the fields –

Use case Name, Id, Actor(s), Description, Precondition, Postcondition, Action Flow, Exceptions, etc.

- All the fields might not be available for all the diagrams.

Use Case Name: <i>Record an offer</i>	ID: UC-3	Priority: High
Actor: <i>Salesperson</i>		
Description: <i>This use case describes how the salesperson records a customer offer on a vehicle.</i>		
Trigger: <i>Customer decides to make an offer on a vehicle.</i>		
Type: ☒ External ☐ Temporal		
Preconditions: <i>Salesperson is authenticated</i> <i>Pending offers datastore is available and on-line</i> <i>Vehicle inventory datastore is available and on-line</i>		

Figure: An Use case description table

Use Case Name: Request a chemical		ID: UC-2	Priority: High
Actor: Lawn Chemical Applicator (LCA)			
Description: The Lawn Chemical Applicator (LCA) specifies the lawn chemical needed for a job by entering its name or ID number. The system satisfies the request by reserving the quantity requested or the quantity available and notifying the Chemical Supply Warehouse of the pick-up.			
Trigger: A Lawn Chemical Applicator (LCA) needs a chemical for a job.			
Type: ☒ External ☐ Temporal			
Preconditions: 1. The LCA identity is authenticated. 2. The LCA has necessary training and credentials on file. 3. The Chemical Supply datastore is up-to-date and on-line.			
Normal Course: 1.0 Request a lawn chemical from the chemical supply warehouse. 1. The LCA specifies the desired lawn chemical 2. The system verifies the chemical is approved for usage 3. The system displays the quantity of the lawn chemical on hand 4. The LCA specifies the quantity needed 5. The system asks the LCA to confirm the request for the quantity needed or the quantity available (Alternative Course 1.1) 6. The system gives the LCA a Chemical Pick-up Authorization for the quantity requested 7. The system notifies the Chemical Supply Warehouse of the chemical pick-up 8. The system stores the Lawn Chemical Request in the Chemical Request datastore <td colspan="2">Information for Steps: ← Chemical name or ID ← List of approved chemicals ← Quantity on hand ← Quantity needed ← Request confirmation → Chemical Pick-up Authorization → Chemical Pick-up Notice → Lawn Chemical Request </td>		Information for Steps: ← Chemical name or ID ← List of approved chemicals ← Quantity on hand ← Quantity needed ← Request confirmation → Chemical Pick-up Authorization → Chemical Pick-up Notice → Lawn Chemical Request	
Alternative Courses: 1.1 Quantity available is less than quantity needed (branch at step 5) 1. The system asks the LCA if he wants the quantity available or to cancel the request 2a. The LCA asks to take the quantity available 3a. The system changes the quantity requested to the quantity available 4a. The system gives the LCA a Chemical Pick-up-Authorization for the quantity available 5a. The system notifies the Chemical Supply Warehouse of the chemical pick-up 6a. The system stores the Lawn Chemical Request in the Chemical Management System 7a. The system notifies Purchasing of the chemical outage 2b. The LCA asks to cancel the request 3b. The system terminates the use case <td colspan="2"> ← Request quantity available → Chemical Pick-up Authorization → Chemical Pick-up Notice → Lawn Chemical Request → Chemical Outage Notice ← Cancellation </td>		← Request quantity available → Chemical Pick-up Authorization → Chemical Pick-up Notice → Lawn Chemical Request → Chemical Outage Notice ← Cancellation	
Postconditions: 1. The Lawn Chemical Request is stored in the Chemical Management System. 2. The Chemical Pick-up Authorization is produced for the LCA. 3. The Chemical Supply Warehouse is notified of the chemical pick-up. 4. Purchasing is notified of chemical outage.			
Exceptions: E1: Chemical is no longer approved for use (occurs at step 2) 1. The system displays message "That chemical is no longer approved for use" 2. The system asks the LCA if he wants to request another chemical or to exit 3a. The LCA asks to request another chemical 4a. The system starts Normal Course again 3b. The LCA asks to exit 4b. The system terminates the use case			
Summary Inputs	Source	Outputs	Destination
Chemical name or ID	LCA	Chemical Pick-up Authorization	LCA
List of approved chemicals	Lawn Chemicals Supply datastore	Chemical Pick-up Notice	Chemical Supply Warehouse
Chemical quantity on hand	Lawn Chemicals Supply datastore	Lawn Chemical Request	Chemical Request datastore
Quantity needed	LCA	Chemical Outage Notice	Purchasing
Request confirmation	LCA		
Request quantity available or cancellation	LCA		

Use case Description (cont.)

- Each **use case** has a ***name*** and ***number***
- The ***priority*** may be assigned to indicate the relative significance of the use case in the overall system.
- The ***actor*** refers a person, another software system, or a hardware device that interacts with the system to achieve a useful goal.
- ***Trigger*** - the event that causes the use case to begin. A trigger can be an *external trigger*, such as a customer placing an order, and *temporal trigger*, such as a DVD becoming overdue at the video store or time to pay the rent.
- ***Preconditions*** define the state the system must be in before the use case commences

Use case Description (cont.)

- **Normal Course**

- description of the major steps that are performed to execute the response to the event
- the inputs used for the steps
- the outputs produced by the steps.
- The normal course lists the steps that are performed when everything flows smoothly in the system.
- This is sometimes called the “*happy path*” because there are no problems or issues that arise when the steps are able to be followed normally.

- **Alternative Courses**

- The steps followed for alternative paths through the use case are outlined.
- Alternative courses are included to depict branches in logic that also will lead to a successful conclusion of the use case.

Notice that the location where the branch in logic from the normal course occurred is clearly stated.

Use case Description (cont.)

- ***Postconditions***

- final products of this use case.
- also serve to define the preconditions for the next use case in the series.

- **Exceptions**

- a use case should describe any error conditions or exceptions that may occur as the use case steps are performed.
- These are not normal branches in decision logic, but are unusual occurrences or errors that could potentially be encountered and will lead to an unsuccessful result.

- **Summary Inputs and Outputs**

- The final section of the use case summarizes the set of major *inputs* and *outputs* to the steps of the use case.
- Each of the major inputs and outputs to the use case are listed, along with its source or destination

Use Case Name: Request a chemical

ID: UC-2

Priority: High

Actor: Lawn Chemical Applicator (LCA)

Description: The Lawn Chemical Applicator (LCA) specifies the lawn chemical needed for a job by entering its name or ID number. The system satisfies the request by reserving the quantity requested or the quantity available and notifying the Chemical Supply Warehouse of the pick-up.

Trigger: A Lawn Chemical Applicator (LCA) needs a chemical for a job.

Type: ☒ External ☐ Temporal

Preconditions:

1. The LCA identity is authenticated.
2. The LCA has necessary training and credentials on file.
3. The Chemical Supply database is up-to-date and on-line.

Normal Course:

- 1.0 Request a lawn chemical from the chemical supply warehouse.
 1. The LCA specifies a chemical needed and the quantity needed
 2. The system lists chemical and quantity on hand from Chemical Supply database
 - a. If the quantity on hand is less than the quantity needed, the LCA specifies the quantity he will take
 - b. Purchasing is notified of chemical shortage
 3. The system gives the LCA a Chemical Pick-up Authorization for the quantity requested
 4. The system notifies the Chemical Supply Warehouse of the chemical pick-up
 5. The system stores the Lawn Chemical Request in the Chemical Request database

Postconditions:

1. The Lawn Chemical Request is stored in the Chemical Management System.
2. The Chemical Pick-up Authorization is produced for the LCA.
3. The Chemical Supply Warehouse is notified of the chemical pick-up.
4. Purchasing is notified of chemical outage.

Exceptions:


- E1: Chemical is no longer approved for use (occurs at step 1)
1. The system displays message, "That chemical is no longer approved for use"
 2. The system asks the LCA if he wants to request another chemical or to exit
 - 3a. The LCA asks to request another chemical
 - 4a. The system starts Normal Course again
 - 3b. The LCA asks to exit
 - 4b. The system terminates the use case



Inspiring Excellence

Practice

- Hospital Management System is a large system including several subsystems or modules providing variety of functions. UML use case diagram example below shows actor and use cases for a hospital's reception.
- Purpose: Describe major services (functionality) provided by a hospital's reception.
- Hospital Reception subsystem or module supports some of the many job duties of hospital receptionist. Receptionist schedules patient's appointments and admission to the hospital, collects information from patient upon patient's arrival and/or by phone. For the patient that will stay in the hospital ("inpatient") she or he should have a bed allotted in a ward. Receptionists might also receive patient's payments, record them in a database and provide receipts, file insurance claims and medical reports.

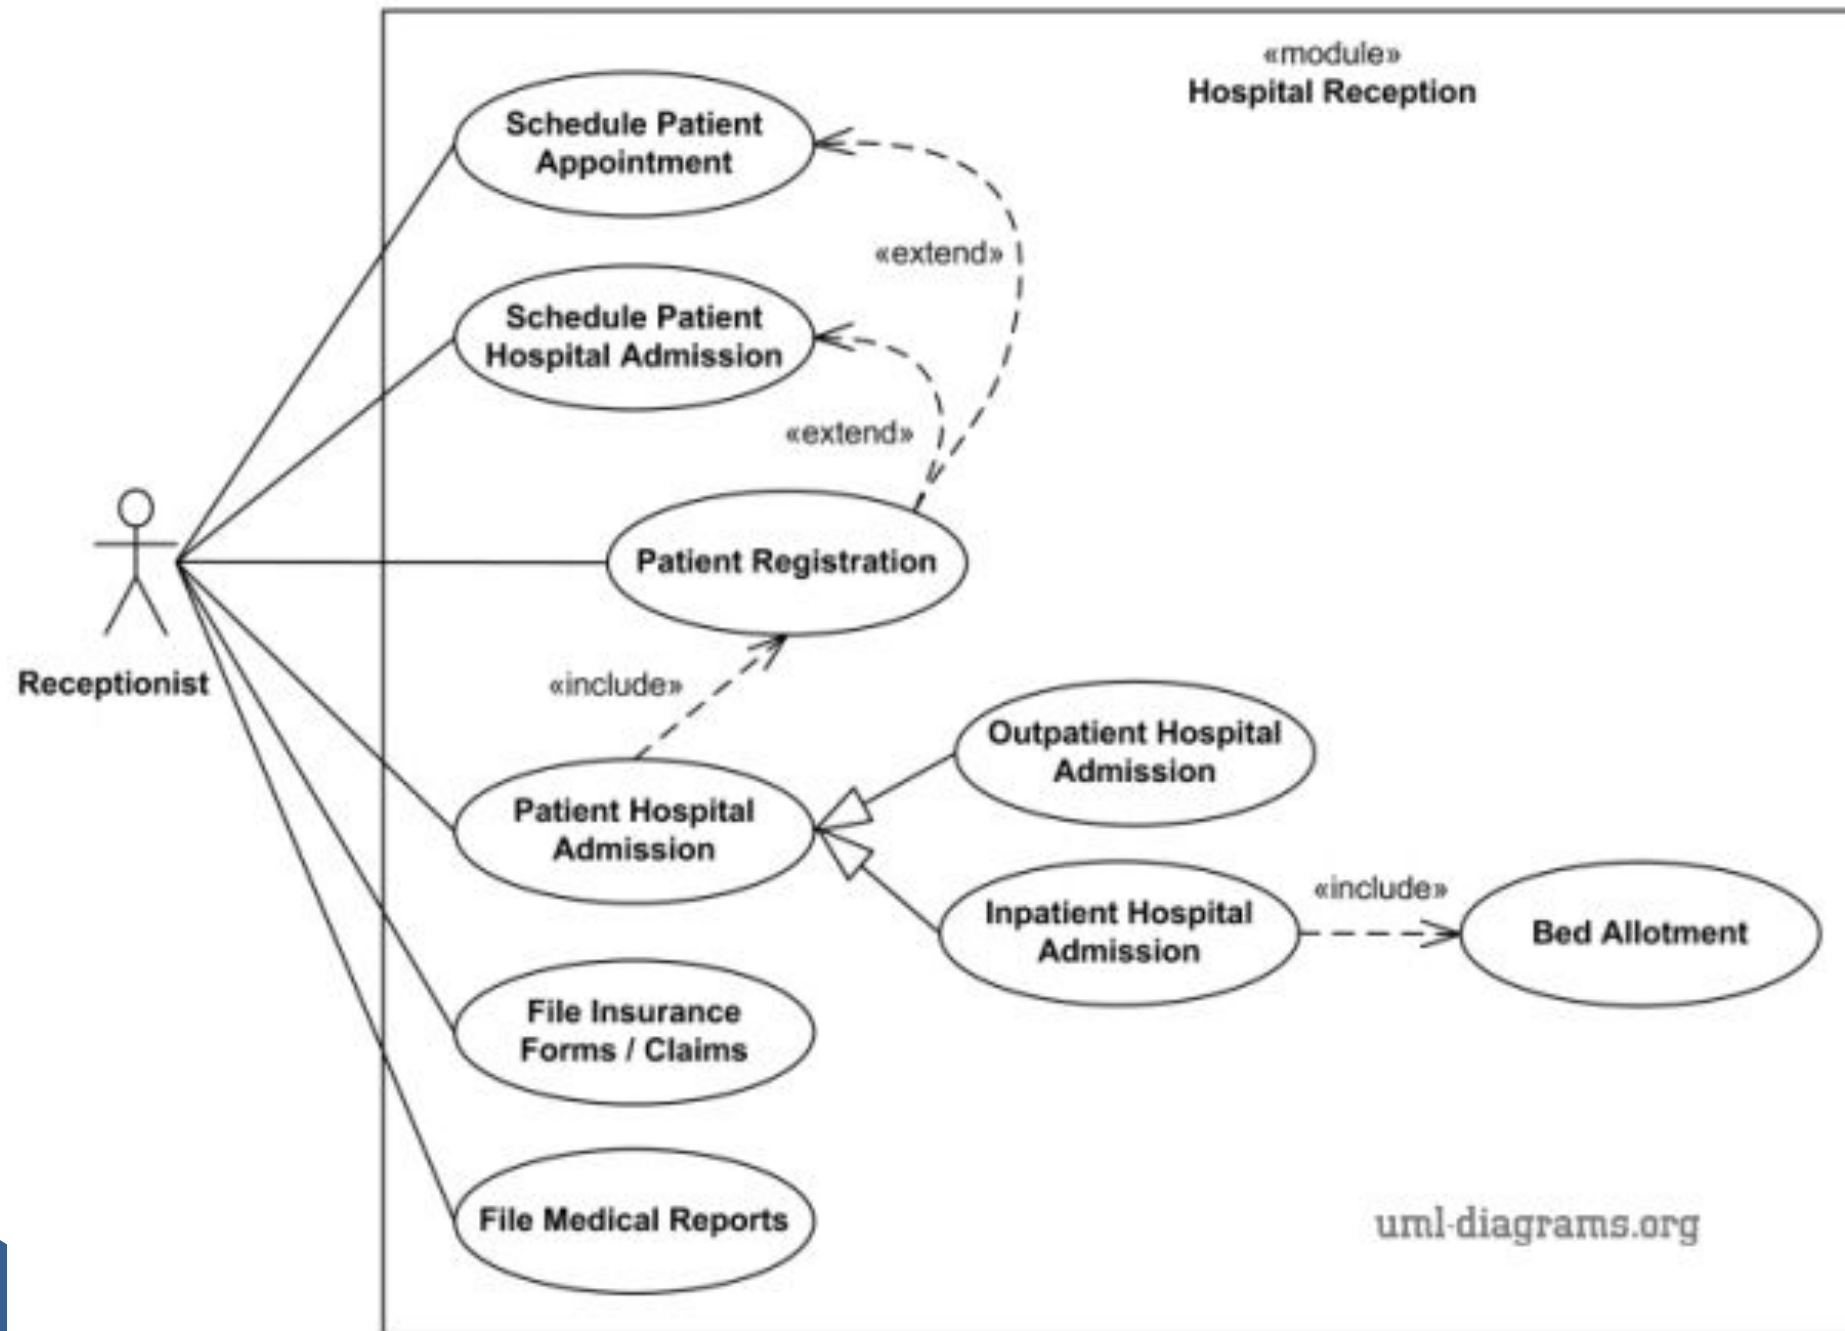

Exercise 1

- Bank customer has to provide pin for login, verified by bank, there could be mistake while entering the pin. An error message will be shown if there is a mistake. Customer can do transactions like (fund transfer, withdraw, change pin, balance check, deposit) etc., ATM Machine will provide a print out if customer wants to get a receipt of their transaction considering some charges. Charges will also apply for each transaction. There is system administrator who monitors users' transaction and report if any suspicious activities is noticed.

Exercise 2

- Suppose, you have been hired to design a course management system. The requirements for the system are as follows:
- Two types of students will use this system, BSc, and MSc. Students will be able to log in to the system using a username and password. The system will check whether the credentials are valid and will give an error message if they are incorrect. Students will be able to add courses they want to complete next semester. The system will check whether the course has remaining seats and if the student has completed all pre-requisite courses to take the course. The system might suggest additional courses to the student when taking a course. After a student has completed adding courses then he/she might request for advising, and an adviser will approve the advising request. Students can view their routine and grade sheet. BSc students can add project proposals whereas MSc students can add thesis proposals and those will be approved by the advisor. Students can also make payments. Payments can be made via card or bank transfer, payment must be verified by the system.

Exercise 3



Inspiring Excellence

In a Bangladeshi courier service system, the process begins when a customer registers or logs into the platform to access its services. To place a courier order, the customer must first be authenticated, after which they can enter shipment details, choose delivery preferences, and proceed to payment. The order is only confirmed once the payment is successfully completed through an integrated online gateway. Upon confirmation, the system automatically generates a courier slip containing parcel and tracking information. The courier staff receive the new orders in their dashboard and proceed to schedule pickups based on location and time preferences. Meanwhile, the admin monitors overall operations, manages users and branch logistics, and addresses any complex issues or customer complaints. Customers can track their shipments in real-time through the system interface. If the parcel has not yet been dispatched, they may also be able to cancel the order. Delivery agents are assigned scheduled pickups and are responsible for updating the parcel's status at each stage of its journey. Before finalizing the delivery, they must log status updates and confirm receipt using verification methods like OTP or customer signature. This coordinated workflow ensures efficient parcel handling and transparency for both customers and service providers.

UML Activity Diagrams

OUTLINE

- Introduction
- Activity Diagrams - notation
- How to apply activity diagrams
- Guidelines
- Examples

What is an Activity Diagram?

- An Activity Diagram is one of the Behavior diagrams.
- Activity modelling is the sequence and conditions for coordinating lower-level behaviors, rather than which classifiers own those behaviors.
- These are commonly called control flow and object flow models.
- The behaviors coordinated by these models can be initiated because other behaviors finish executing, because objects and data become available, or because events occur external to the flow.
- A UML Activity Diagram shows sequential and parallel activities in a process.
- Useful for modelling:
 - Business processes
 - Workflows
 - Data flows
 - Complex algorithms

Initial and Final Nodes

- Initial Node:
 - An initial node is a control node at which flow starts when the activity is invoked.
 - An activity may have more than one initial node.



- Final Node:
 - An activity may have more than one activity final node; the first one reached stops all flows in the activity.



Action

- **Action:**
 - An action represents a single step within an activity that is not further decomposed within the activity.
 - An activity represents a behavior that is composed of individual elements that are actions.
 - An action is simple from the point of view of the activity containing it, but may be complex in its effect and not be atomic.
 - An activity can be reused in many places, whereas an instance of an action is only used once at a particular
 - An action will not begin execution until all of its input conditions are satisfied.



Action

Merge and Decision Nodes

- Merge Node:



- A merge node is a control node that brings together multiple alternate flows.
- It is not used to synchronize concurrent flows but to accept one among several alternate flows.
- A merge node has multiple incoming edges and a single outgoing edge.

- Decision Node:



- A decision node accepts tokens on an incoming edge and presents them to multiple outgoing edges.
- Which of the edges is actually traversed depends on the evaluation of the guards on the outgoing edges.

Join and Fork Nodes


- Join Node:

- A join node is a control node that synchronizes multiple flows.
- A join node has multiple incoming edges and one outgoing edge.




- Fork Node:

- A fork node is a control node that splits a flow into multiple concurrent flows.
- A fork node has one incoming edge and multiple outgoing edges.

Fork Node

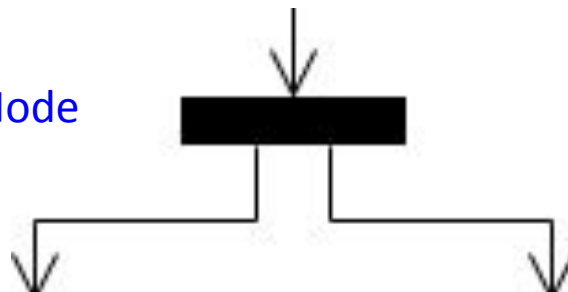

Join Node

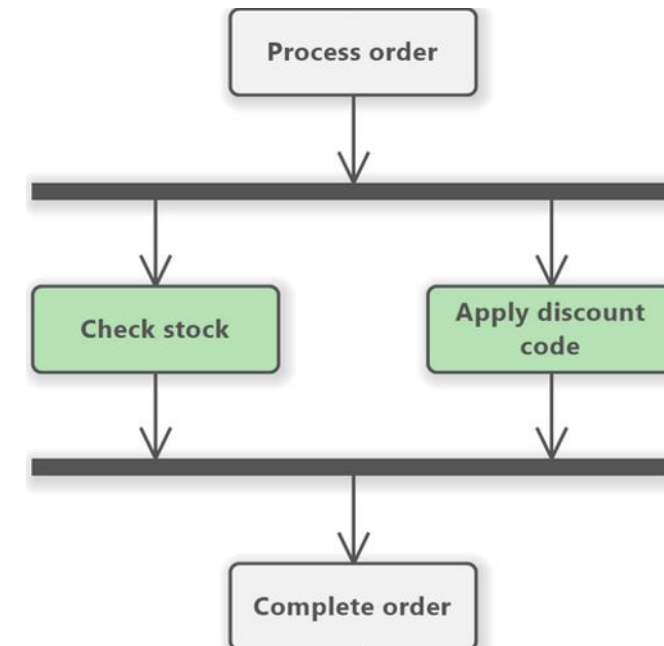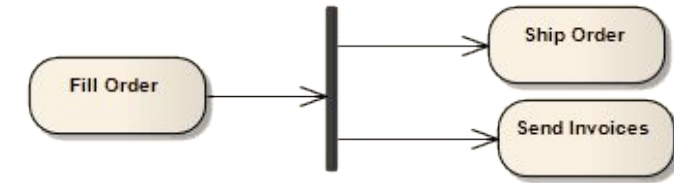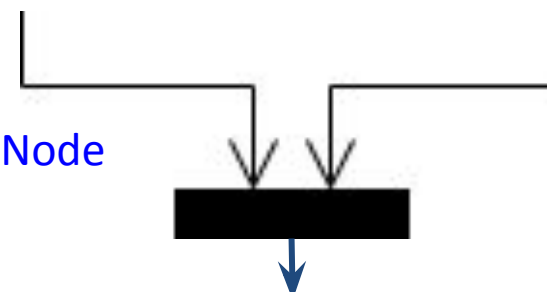

Object Node

- Object Node:
 - An object node is an activity node that indicates an instance of a particular classifier, possibly in a particular state, may be available at a particular point in the activity.
 - Object nodes can be used in a variety of ways, depending on where objects are flowing from and to.

ObjectNode


NOTE

- Note:
 - A note (comment) gives the ability to attach various remarks to elements.
 - A comment carries no semantic force, but may contain information that is useful to a modeler.




Business Process Modelling

- Example: Parcel shipping
 - The process of shipping a parcel is non-trivial; there are many parties involved (customer, driver, . . .) and many steps.
 - The process can be captured by a Use Case diagram, but activity diagrams are great example of “a picture being worth a thousand words”.
 - Object nodes are useful for illustrating what is moving around.

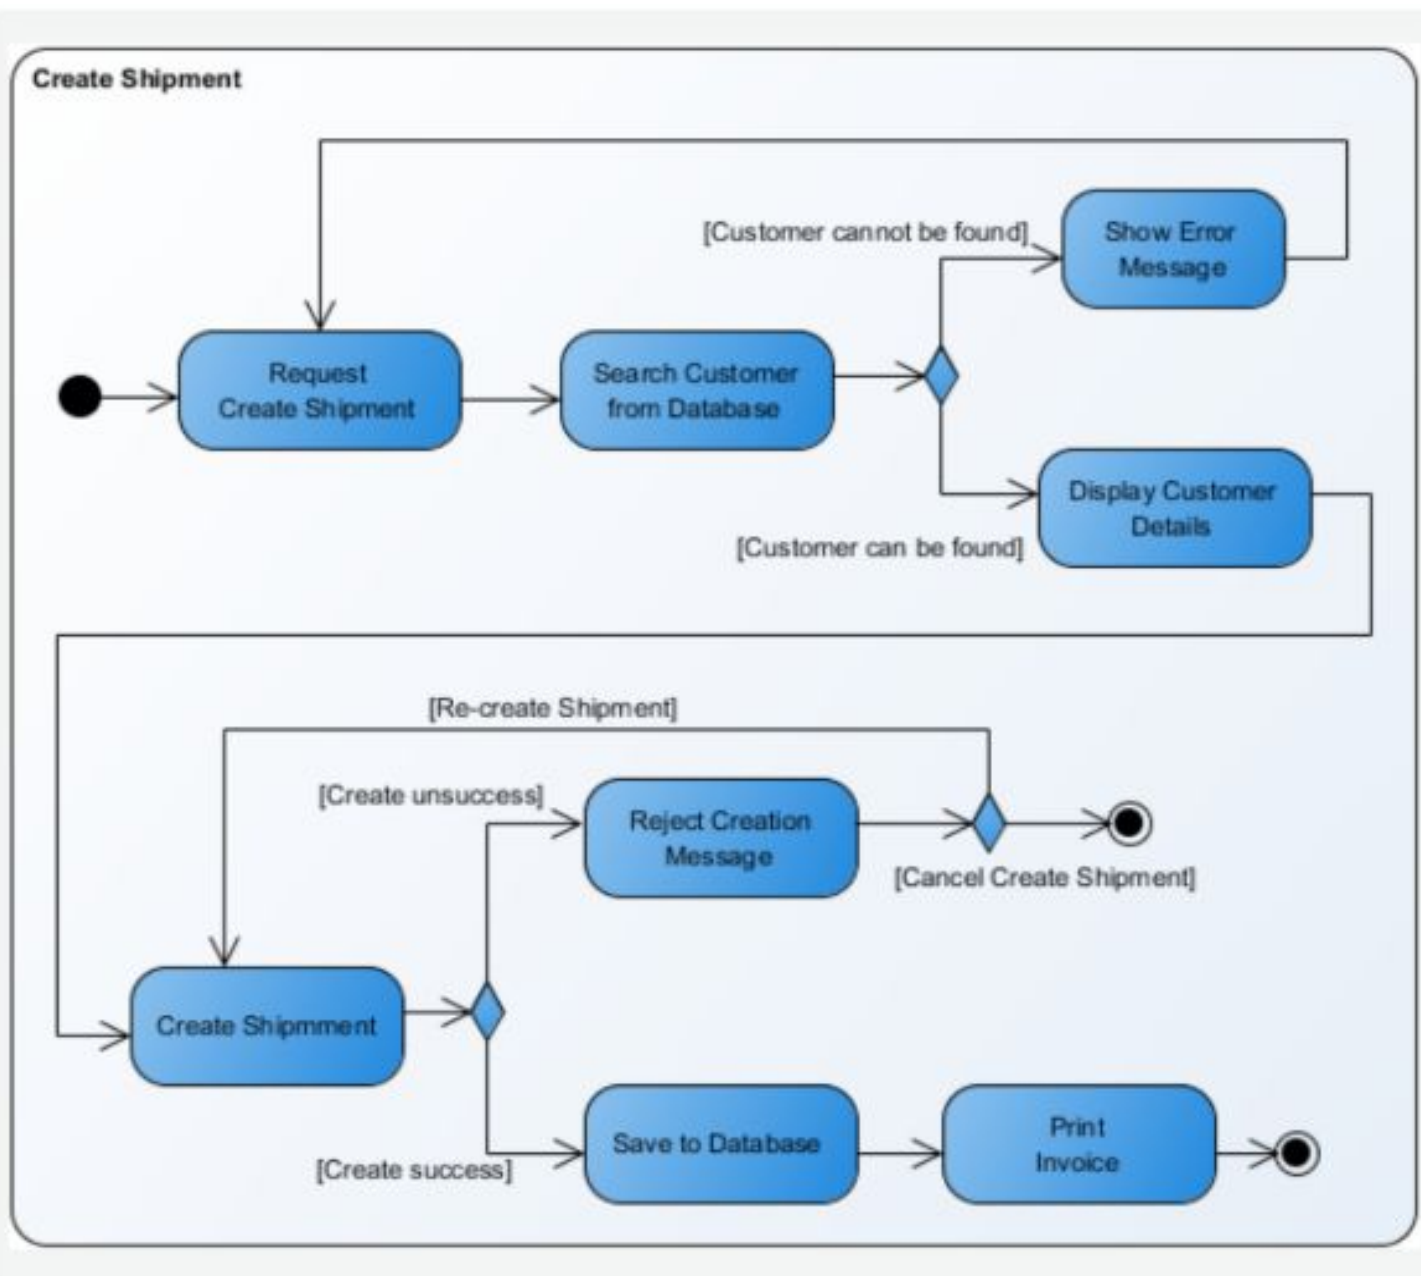


Activity Diagram of order management system

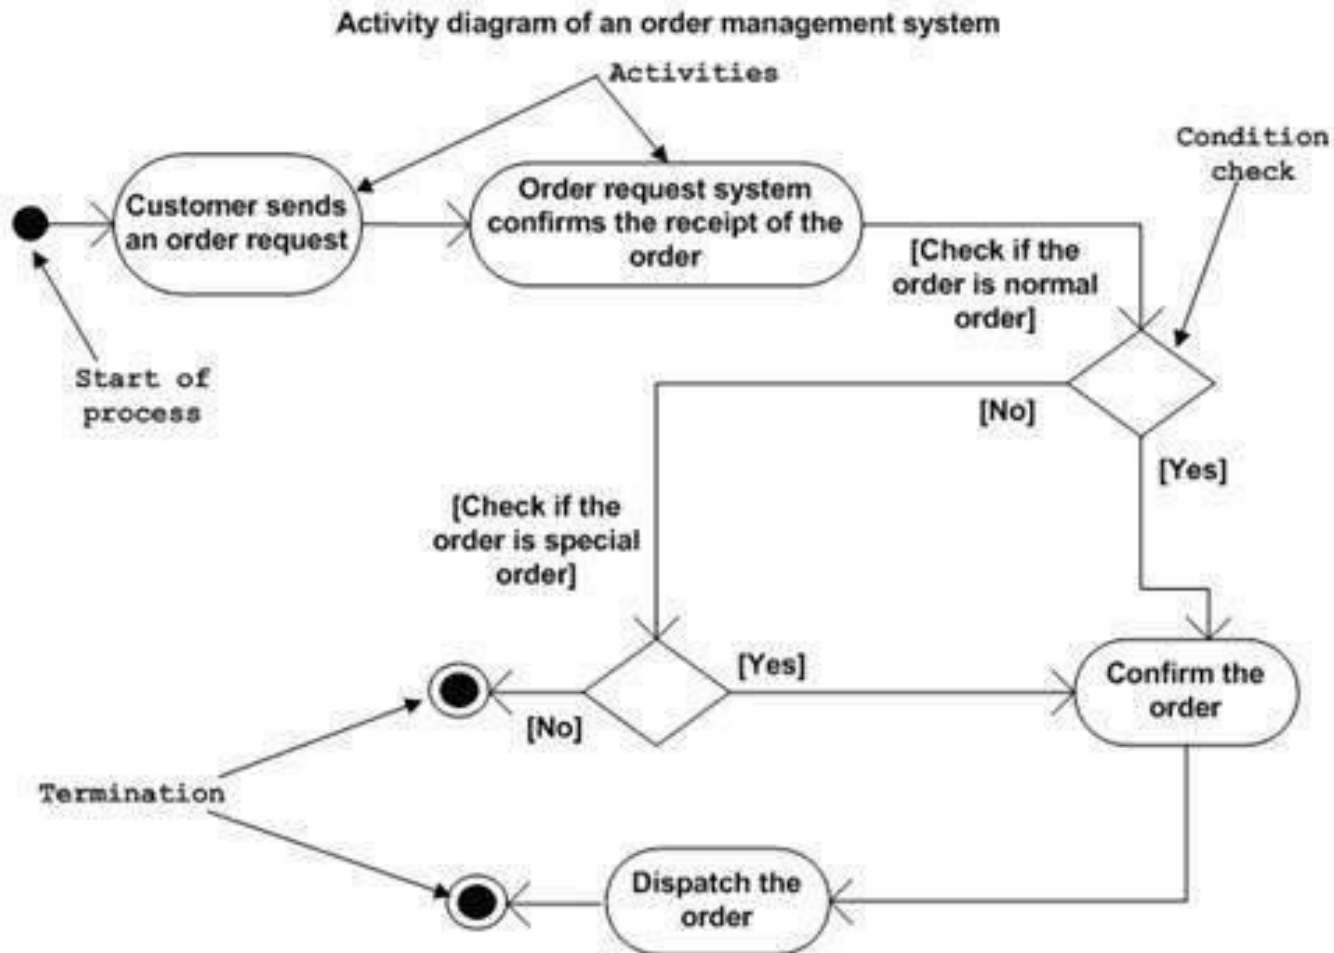

Guideline for Activity Modelling

- The technique proves most valuable for very complex processes, usually involving many parties.
- On a first overview “level 0” diagram, keep all the actions at a very high level of abstraction, so that the diagram is short. Then expand details in sub-diagrams at the “level 1” level, . . . etc.
- Try to make the level of abstraction of action nodes roughly equal within a diagram (Very different levels of abstraction might be a node labelled “Deliver Order” and a node labelled “Calculate Tax”).

More Exa

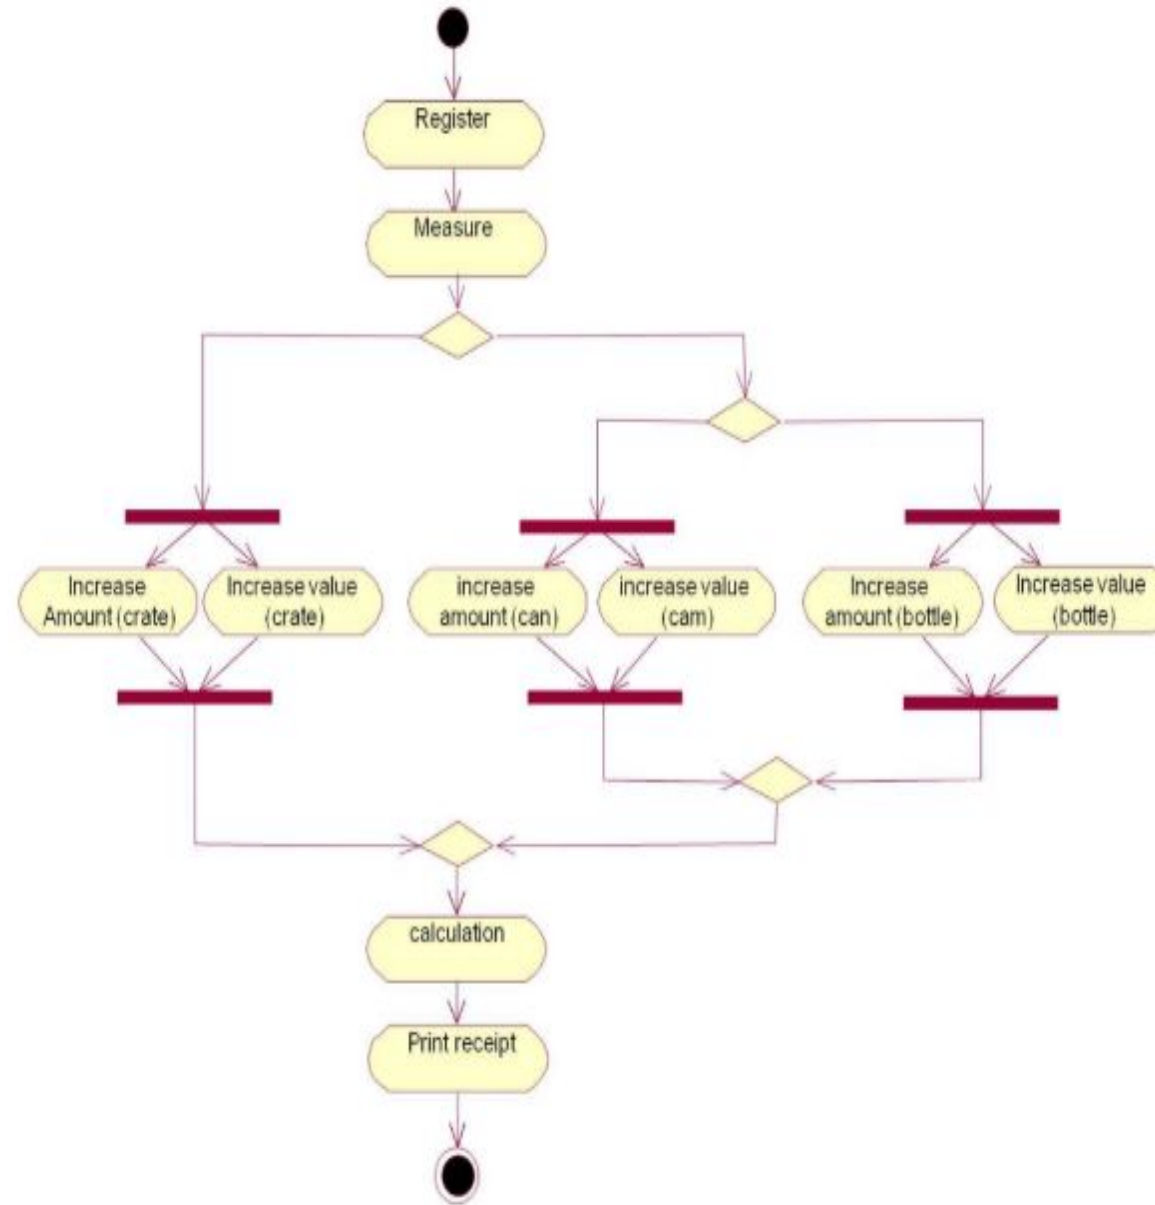

ns

Swimlanes

- Swimlanes (or activity partitions) indicate where activities take place.
- Swimlanes can also be used to identify areas at the technology level where activities are carried out
- Swimlanes allow the partition an activity diagram so that parts of it appear in the swimlane relevant to that element in the partition

Swimlanes

- Partitions may be constructed on the basis of:
 - the class and actor doing the activity
 - Partitioning by class and actor can help to identify new associations that have not been documented in the class model
 - the use case the activity belongs to
 - Partitioning by use cases can help document how use cases interact


Example Activity

Process Order - Problem Description


Once the order is received, the activities split into two parallel sets of activities. One side fills and sends the order while the other handles the billing.


On the Fill Order side, the method of delivery is decided conditionally. Depending on the condition either the Overnight Delivery activity or the Regular Delivery activity is performed.


Finally the parallel activities combine to close the order.

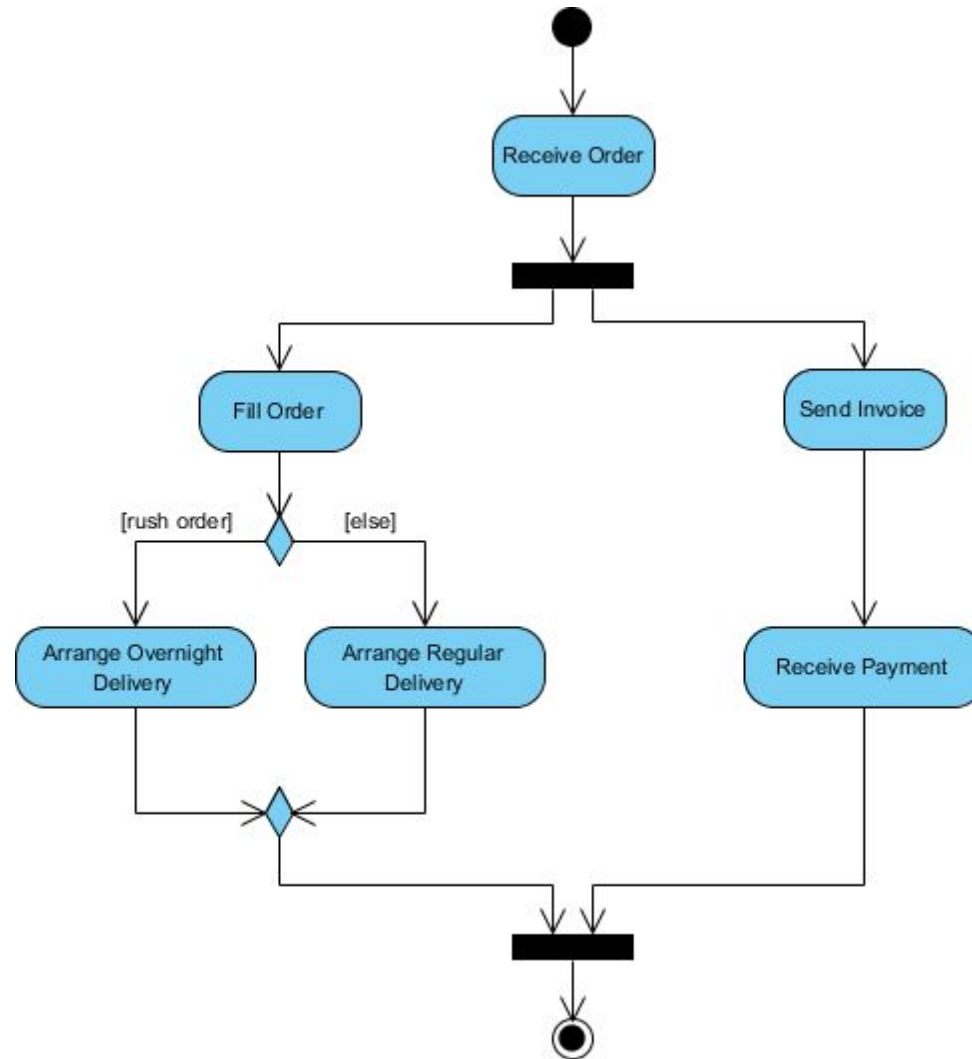


Example Swimlanes

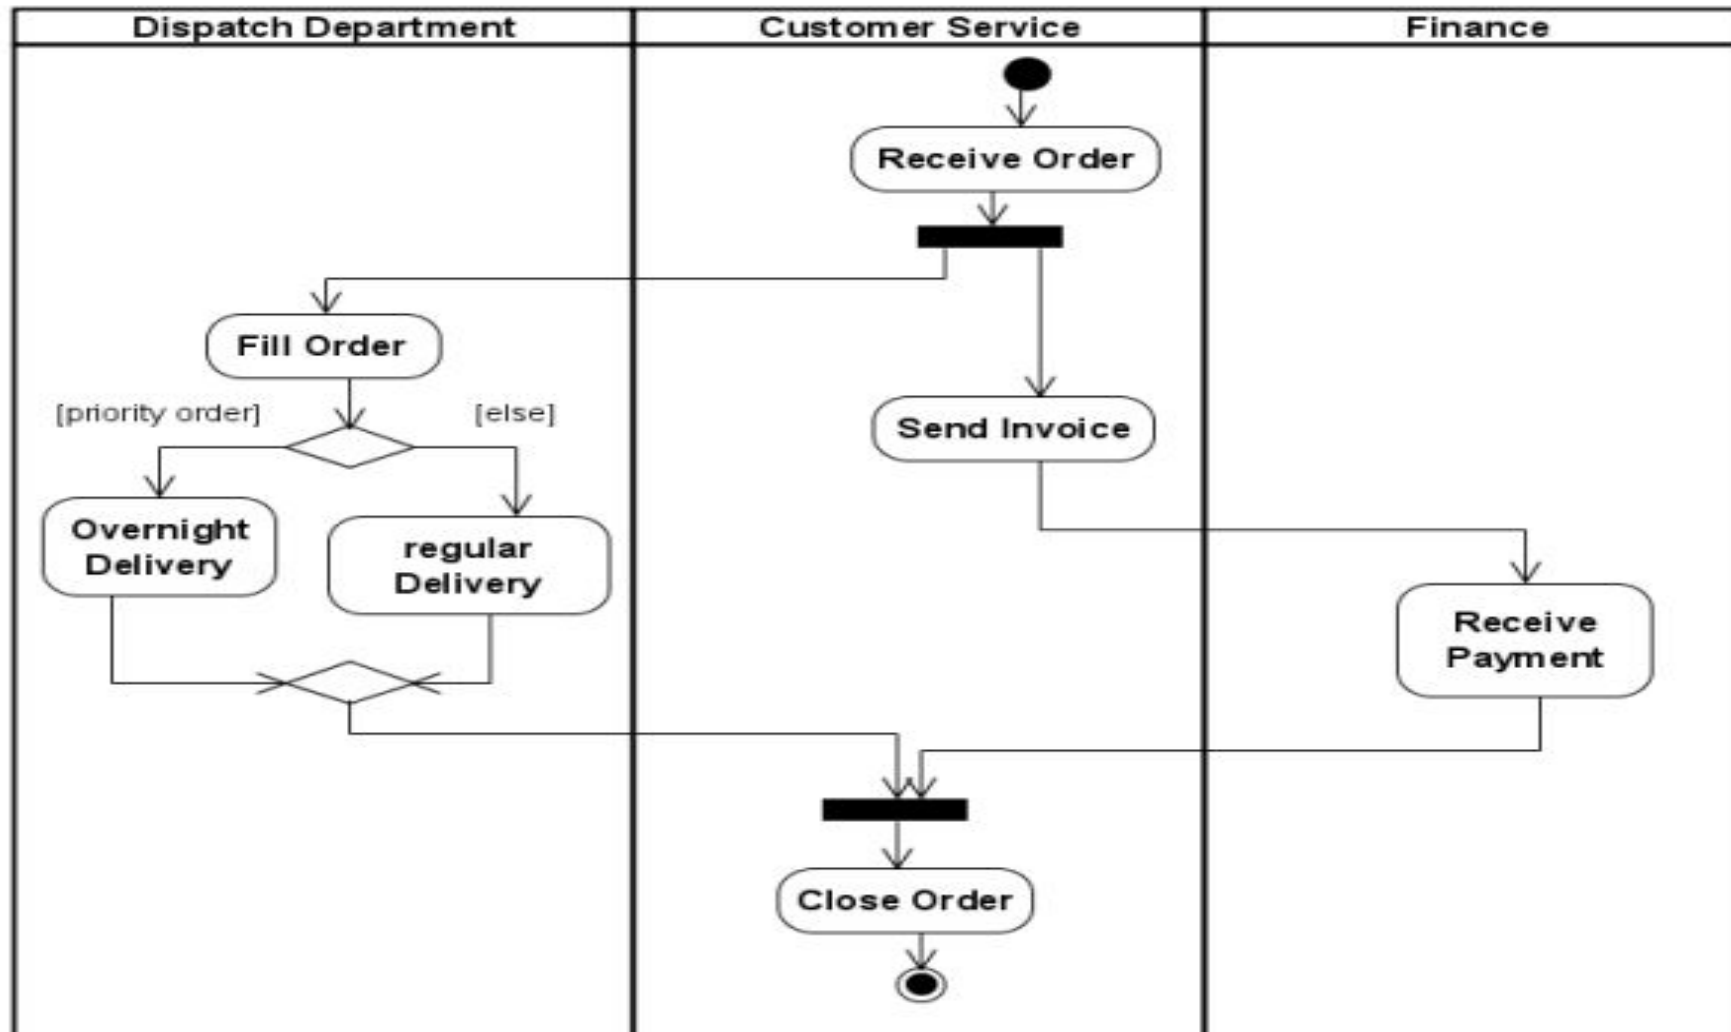

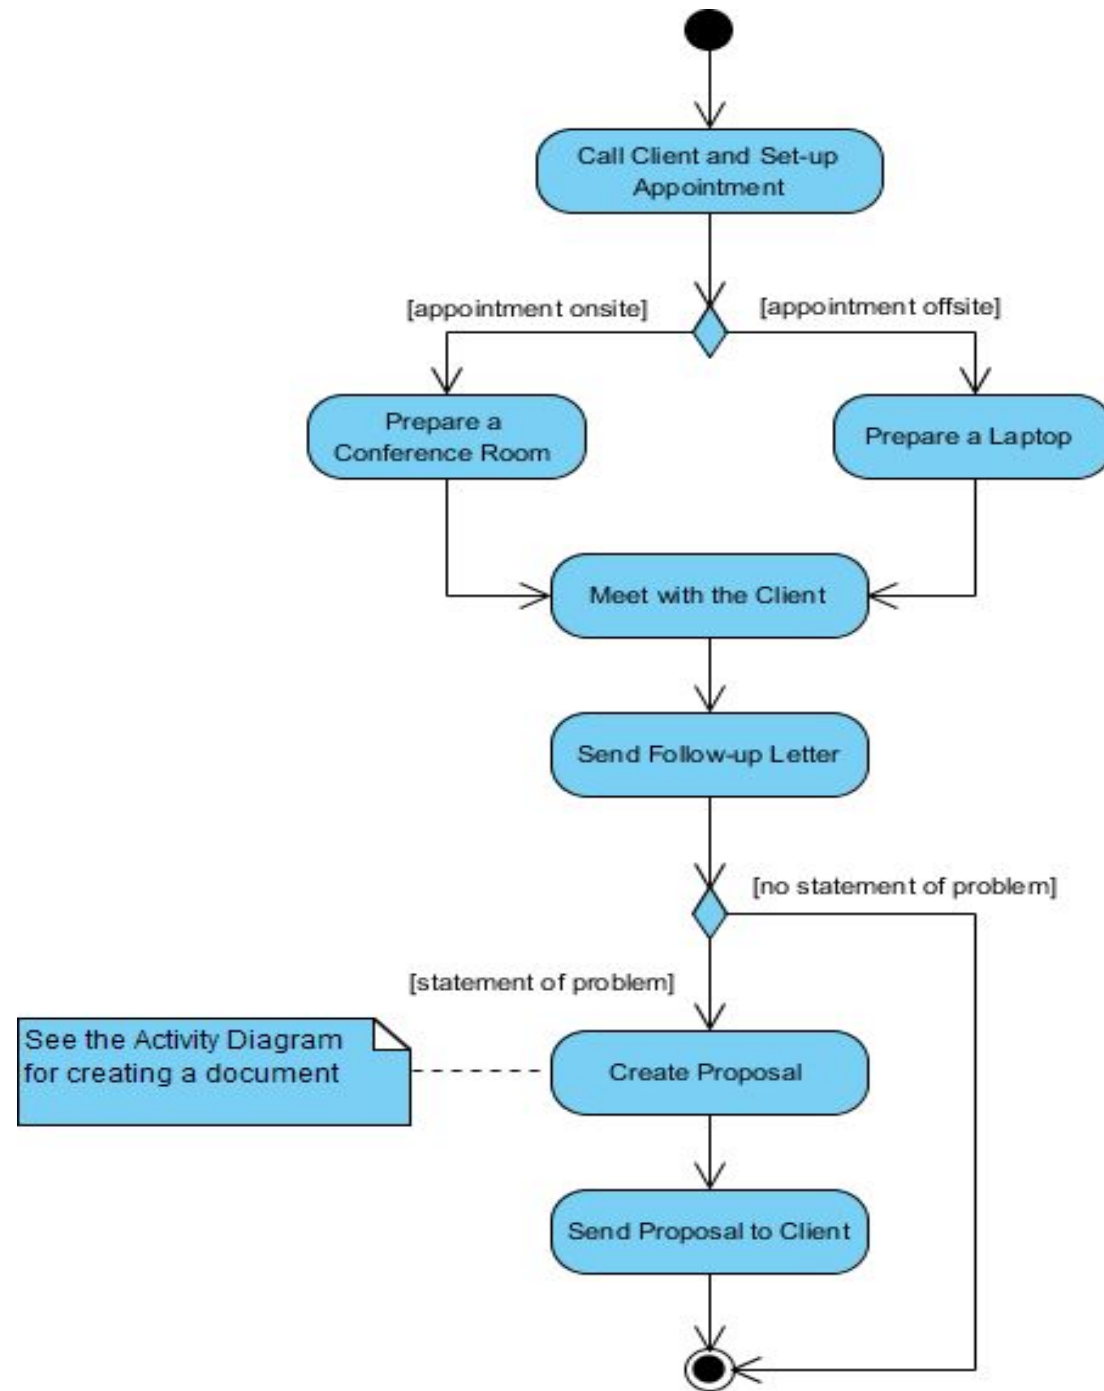


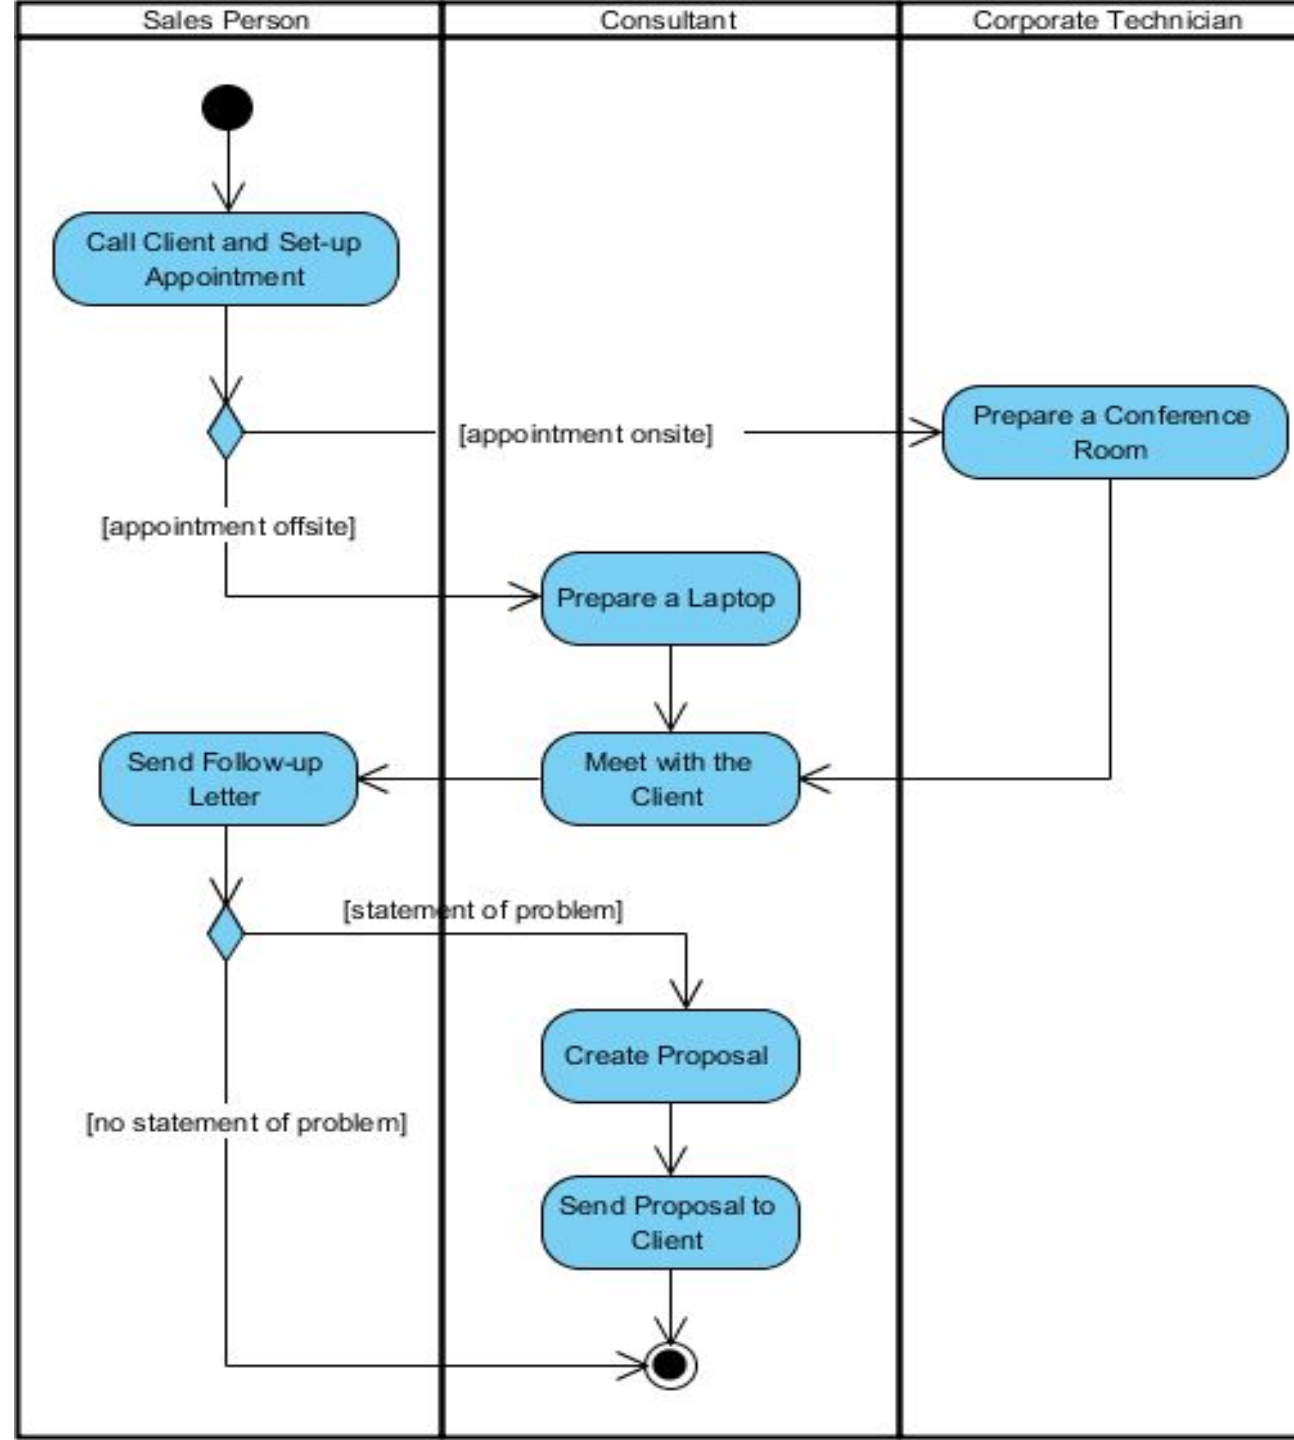

UML Activity Diagram: Order Processing

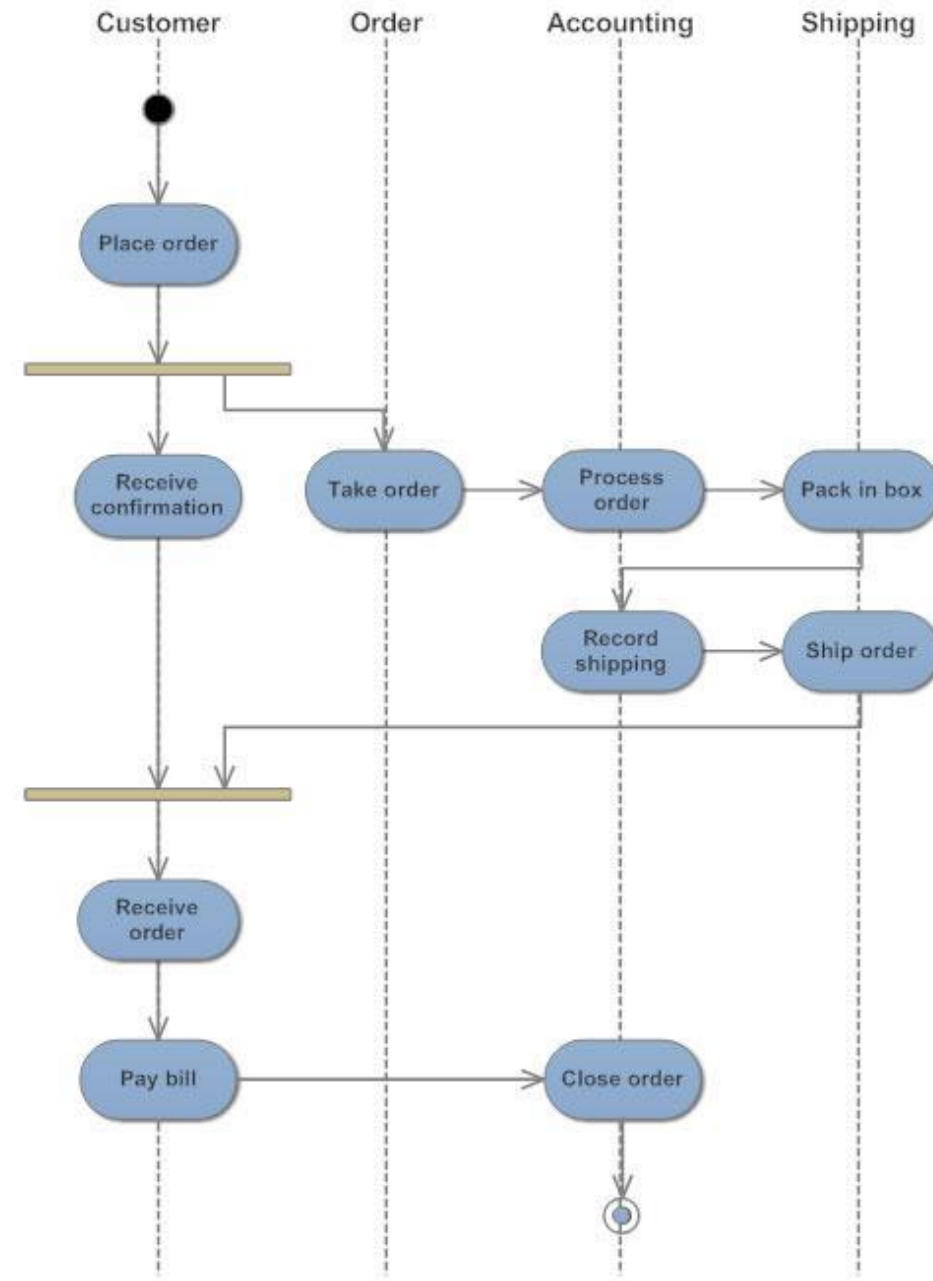

ATM SYSTEM for ABC BANK

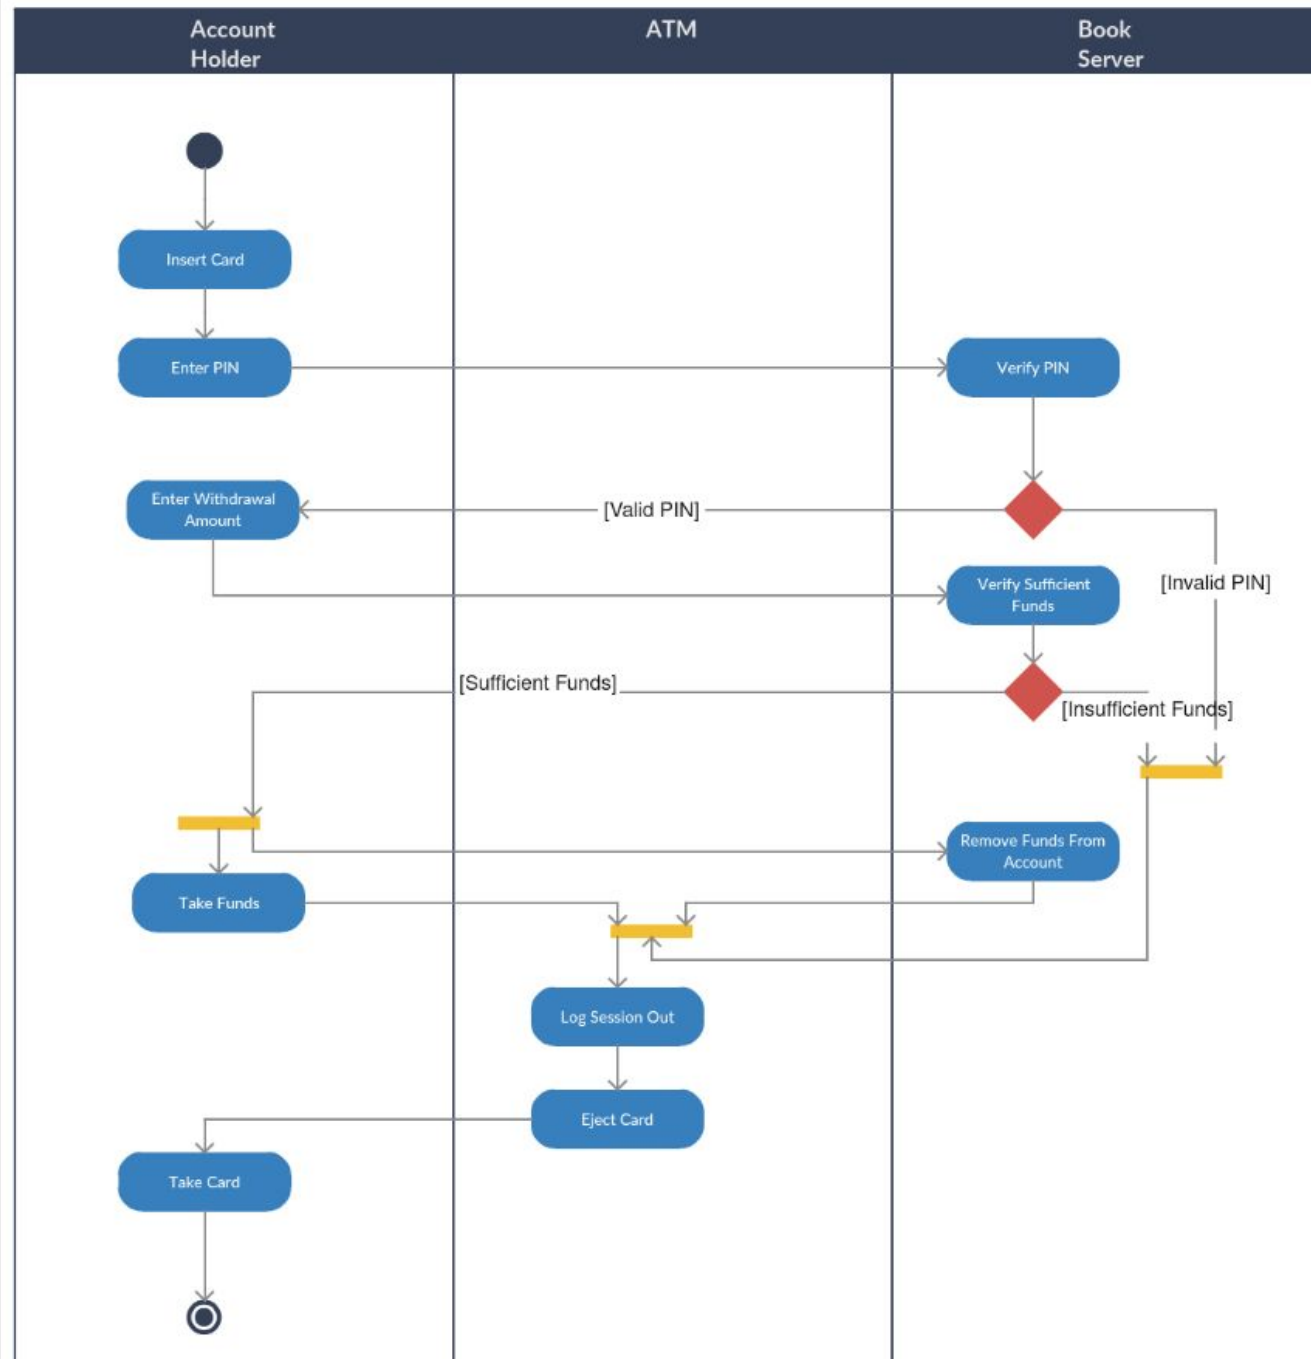

Student Assistance Fund (SAF) authorization has a number of steps in its approval process. A SAF authorization form is used in most universities to approve funding for students to aid their studies. Suppose a student fills out a blank form and sends it to his or her departmental chairperson for a signature. If the amount of funds requested by the student is small (under Tk. 10,000), then the chairperson signs the form and routes it to accounts payable to be input into the accounting system. The system cuts a check that is sent to the student for the right amount, and after the check is cashed, the form is filed away with the canceled check. If the check is not cashed within 30 days, the form expires. When the amount of the requested fund is large (over Tk. 10,000), the chairperson signs the form and sends it to the chief financial officer along with a paragraph explaining the reason for the grant, and the chief financial officer will sign the form and pass it along to accounts payable. Both the chairperson and the chief financial officer can reject the SAF authorization form if they do not feel that the reasons for seeking funding are reasonable. In this case, the student can change the form to include more explanation or decide to pay the entire fee.

• Design an activity diagram based on the above information.