IT PAT 2026

Author: `Ewan Connan`

To-do

- [x] ~~Change incorrect password and stuff like that to a label on the login/create account gui rather than a popup. Make the label text red.~~
- [x] ~~Save the passwords as hashed versions and not as plain text for extra security.~~
- [x] ~~Implement a security feature where the whole text file is hashed and that hash is stored on the first line, if the hash of the document does not match what is on the first line then the document has been meddled with and cancel all logins, otherwise continue as per usual.~~
- [x] ~~Swap TStringList to an array cuz school want array~~
- [x] ~~Save the last user that was logged in in an ini file(cuz easy to insert and use :D) and automatically log them in when they reopen the application.~~
- [ ] Change last logged in user to make more secure (currently stored as plain text, encrypt it)
- [ ] Do documentation
- [ ]

Task 1A

SmartEats currently records its menu, customer orders and payments on paper. This causes pricing errors, misplaced orders and delays, especially when several waiters place orders at the same time. Staff also need to see accurate prices and totals before an order is saved and billed. The restaurant therefore needs a single, reliable digital system that staff can use quickly during service.

The proposed solution is a Delphi FireMonkey desktop application for restaurant managers and waiters. The manager can add, view, update and delete menu items, while a waiter can select menu items, set quantities, capture the customer, waiter and table number, and see the subtotal, 15% VAT and total before saving the order. A saved order can be exported as a formatted text-file bill. The design also includes a built-in AI assistant that will give short food recommendations.

The scope is one Windows application with a Microsoft Access database containing three related tables, text files for secure login details and receipts, arrays for order lines, and reusable methods. Reports and order editing are planned. The program is limited to 64-bit Windows and a local database; it does not process payments, manage stock or handle bookings.

Task 1B

User stories

As a…	I want to…	Limitations
Manager	log in with a username and password	Usernames must be unique
Manager	add a new menu item with a name, category and price	Categories limited.
Manager	update the name, category or price of an existing menu item	Categories limited.
Manager	delete a menu item that is no longer sold	Only able to delete menu items that have not been previously ordered.
Manager	move to the first, previous, next or last menu record	None
Waiter	create an order for a table by choosing menu items and quantities	None
Waiter	remove an incorrect order line and see the totals update immediately	None
Waiter	save the order and export a formatted bill to a text file	None
Waiter	ask the AI assistant for a food recommendation so that I can answer a customer quickly.	Response times can vary.

Acceptance Tests

Test action or input	Expected result
Enter a valid username and password on the Login form and click Enter.	The Staff Portal opens and data.ini stores the username as last_logged_in.

Enter a valid username with an incorrect password.	The red message "Username or password is incorrect." appears, both fields are cleared and the Login form remains open.
Change one character in a stored line of login-details.txt, then try to log in.	A critical-error message appears and the login is blocked.
Enter a menu item name, choose a category, enter a price and click Add.	The new item appears in the menu grid and in the order-item combo box, the item count increases and a new row is stored in tblMenuItem.
Select a menu row, change its price and click Update.	The grid shows the new price and the corresponding database row is updated.
Select an unreferenced menu item and click Delete.	The item disappears from the grid and the order-item combo box, and its database row is deleted.
Click the first, previous, next and last navigation buttons.	The selected row moves within the grid, the fields show the selected record and the selection stops at the first and last rows.
Select an order line and click Remove line.	The line disappears from the grid and the subtotal, VAT and total are recalculated.
Enter a customer, waiter and table number for a valid order and click Save Order.	A new row is stored in tblOrders, the order lines are appended to tblOrderItem and the Export Bill button becomes enabled.
After a successful save, click Export Bill to file.	A receipt-yyyy-mm-dd-hh-nn-ss.txt file is created in data/receipts containing the header, order lines, subtotal, VAT and total, and a confirmation message is shown.

Task 2: Data Dictionary

Variables

Name	Data type	Scope and unit	Purpose
APP_PATH	String	Global, Main_u	Stores the application's folder path and is used to locate the database, data files and receipts.
sCurrentUser	String	Global, Main_u; also a public field of TfrmMain	Holds the username of the signed-in user. The two same-named variables are a maintainability risk and contribute to the account-creation session issue in Section 9.

GlobalPosTop, GlobalPosLeft	Integer	Global, Main_u	Remember the position of the form being replaced so that the next form opens in the same place.
FHelpers	THelperFunc	Global, Helpers_u	Shared helper object for hashing, text-file and INI operations.
dbOrders	TdbOrders	Global, DB_u	Shared database object that owns the connection, tables and data sources.
VAT	Constant Real = 0.15	Class constant, TfrmMain	VAT rate used in all calculations.
ALPHANUMERIC, NUMERIC, ALPHABET	Constant String	Class constants, THelperFunc	Character sets used to filter edit boxes.

sLine, sUsername, sPassword, sHashedInputPassword	String	Local, TfrmLogin.btnLoginClick	Temporary values while parsing a login line and hashing the entered password.
iPos	Integer	Local, TfrmLogin and TfrmCreateAcc	Position of the semicolon that separates username and password.
bCredentialsCorrect	Boolean	Local, TfrmLogin.btnLoginClick	Flag that stops the search when a matching account is found.
bPassHasChar, bPassHasNum	Boolean	Local, TfrmCreateAcc	Record whether the password contains a letter and a digit.
bDecimalPt	Boolean	Local, TfrmMenu.edtMenuPriceValidating	Ensures that a price contains at most one decimal separator.

iPrevOrderID	Integer	Private field, TfrmOrder	Stores the ID of the order being edited. It is reset to -1 when the form is shown.
dSubtotal	Double	Local, TfrmOrder.UpdateOrderDisplay and TdbOrders.ExportReceipt	Running subtotal before VAT.
lines	TArray<TOrderLineRec>	Local, TdbOrders.ExportReceipt	Collected receipt lines, each containing an item name, price and quantity.
sCustomer, sWaiter	String	Local, TdbOrders.ExportReceipt	Values read from the selected order.
OrderDate	TDateTime	Local, TdbOrders.ExportReceipt	Date and time of the selected order.
iOrderID	Integer	Local, TdbOrders.NewOrder and UpdateOrder	Primary key of the order header.

sFileData, sFileHash, sHashKey, sLine	String	Local, THelperFunc	File contents, calculated hash, stored hash and one line of a text file.
bFirstLine	Boolean	Local, THelperFunc	Distinguishes the hash line from the data lines.

Components

Component type	Naming prefix	Purpose in this project
TForm	frm	Separate screens for login, account creation, the staff portal, menu management, order placement and reports.
TPanel	Panel	Groups the top bar and the centred login panels.
TRectangle	rect	Draws the closed and open side panels for the Chatty assistant.
TButton	btn	Login, create account, navigation, CRUD, save, export and clear actions.
TLabel	lbl	Field captions, the current-user label, item count, order totals and red error messages.
TEdit	edt	Username, password, menu item name, price, customer, waiter, table and quantity input.
TComboBox	cmb	Category selection (Starters, Mains, Desserts, Drinks) and menu-item selection.

TStringGrid	grd	Displays menu records and the current order lines, and allows row selection.
TStringColumn	col	Defines the visible columns and widths of each grid.
TMemo	mem	Multi-line AI input, AI response and report output.
TFDConnection	con	Opens the Microsoft Access database through the FireDAC MSAcc driver.
TFDTable	tbl	Provides record-level access to each database table.
TDataSource	dsc	Links each table to a data source; available for data-aware components.
TStringList	sl	Builds the receipt text before it is written to disk.
TIniFile	iniFile	Reads and writes the last_logged_in value in data.ini.
TextFile	t	Reads and appends the login-details text file.
TArray	arr	Stores the current order and the menu-index mapping.
Record (TOrderLineRec)	—	Groups an item name, price and quantity for a receipt line.
Class (TdbOrders, THelperFunc)	T	Separates database logic and reusable file/INI logic from the forms.

Text Files

File and path	Format	Purpose
data\login-details.txt	Line 1: 64-character SHA-256 hash of the remaining data. Following lines: username;SHA-256(password). Blank lines are ignored.	Stores staff accounts without storing plain-text passwords and detects tampering with the file.

data\receipts\receipt-yyyy-mm-dd-hh-nn-ss.txt	Fixed-width text receipt with restaurant header, date, customer, waiter, table, item lines, subtotal, VAT and total.	Gives the customer a printable bill and the restaurant a permanent record.
data\data.ini	INI text: [general] section with last_logged_in=<username> or none.	Remembers the last user so the application can restore the session when it starts.

Arrays

Name and declaration	Where used	Purpose and value
TOrderLine = array[0..1] of Integer	Type declared in Helpers_u	Defines one order line as a pair: [MenuItemID, Quantity]. It keeps the order data compact and easy to pass to database methods.
arrNewOrder: TArray<TOrderLine>	TfrmOrder	Holds the current order while the waiter adds or removes lines. A dynamic array is used because the number of lines changes during service.

arrMenuIndexToID: TArray<array[0..1] of Integer>	TfrmOrder	Maps each combo-box index to the matching MenuItemID. This is a two-dimensional mapping array: [i][0] is the combo index and [i][1] is the database primary key. It allows the combo box to show names while the program still uses stable IDs.
arrOrderTmp	TfrmOrder.btnOrderRemoveLineClick	A temporary dynamic array that receives every line except the one being removed. The old array is then replaced, which avoids leaving a gap in the order.
arrData, arrKeys, arrValues, arrDefaults	THelperFunc.AppendToTextFile, IniWriteString, IniReadString	Allow the helper methods to accept any number of values and keys, so the same method can be reused for different files and settings.
arrListLines: TArray<String>	THelperFunc.SetFileHashKey	Stores the data lines while the first line (the hash) is recalculated and rewritten.
lines: TArray<TOrderLineRec>	TdbOrders.ExportReceipt	Collects the receipt lines with their names, prices and quantities before formatting. It separates data collection from text formatting.

grdMenu.Cells[column, row] and grdOrderLines.Cells[column, row]	TfrmMenu, TfrmOrder	The grid's two-dimensional cell array is used to display and read tabular data.

Login file format example:

a1b2c3d4e5f6... (SHA-256 hash of all account lines)

admin;5e884898da28047151d0... (SHA-256 hash of password)

ewan123;8d969eef6ecad3c... (SHA-256 hash of password)

Receipt example:

```
==================================================
                  SMART EATS
           123 Main Road, Cape Town
              Tel: 012 345 6789
==================================================
Date : 2026-10-12 21:27:51
Customer : Don
Waiter : Ewan
Table : 12
--------------------------------------------------
Item                   Qty            Line total
--------------------------------------------------
Curry +++++            2              R 280.00
Curry                  1              R 20.00
--------------------------------------------------
Subtotal                              R 300.00
VAT (15%)                             R 45.00
TOTAL DUE                             R 345.00
==================================================
        Thank you for dining with us!
```

User Defined Methods

Method	Unit or class	Parameters and return value

THelperFunc.ConfirmFileValidity	Helpers_u	sPath: String; returns Boolean
THelperFunc.AppendToTextFile	Helpers_u	sPath: String, cDelimiter: Char, arrData: TArray<String>
THelperFunc.SetFileHashKey	Helpers_u	sPath: String
THelperFunc.IniWriteString	Helpers_u	sSection: String, arrKeys, arrValues: TArray<String>
THelperFunc.IniReadString	Helpers_u	sSection: String, arrKeys, arrDefaults: TArray<String>; returns TArray<String>
TStringsHelper.SetCount	Helpers_u	Value: Integer

TdbOrders.Create and Destroy	DB_u	sDBPath: String
TdbOrders.LoadMenu	DB_u	None
TdbOrders.AppendMenu	DB_u	ItemName, Category: String; ItemPrice: Double
TdbOrders.UpdateMenu	DB_u	ItemName, Category: String; ItemPrice: Double; iItemID: Integer
TdbOrders.DeleteMenuItem	DB_u	iItemID: Integer
TdbOrders.GetMenuItemName	DB_u	iItemID: Integer; returns String
TdbOrders.GetMenuItemPrice	DB_u	iItemID: Integer; returns Double
TdbOrders.NewOrder	DB_u	sWaiter, sCustomer: String; iTableNo: Integer; arrOrder: TArray<TOrderLine>; returns Integer


TdbOrders.UpdateOrder	DB_u	sWaiter, sCustomer: String; iTableNo: Integer; arrOrder: TArray<TOrderLine>; iOrderID: Integer
TdbOrders.ExportReceipt	DB_u	sFilePath: String; iOrderID: Integer
TfrmMain.SwapForm	Main_u	aFrom, aTo: TForm
TfrmMain.CurrentUserUpdate	Main_u	None
TfrmMain.InitLocalAI, StartLlamaServer, StopLlamaServer, MakeStreamProc, MessageAI	Main_u	Various
TfrmOrder.IndexToID	Order_u	iIndex: Integer; returns Integer
TfrmOrder.UpdateOrderDisplay	Order_u	None
TfrmMenu.UpdateRowData	MenuMng_u	iRow: Integer

Classes and Objects

Name	Fields, types	Purpose	Procedures &/ Functions
TOrderLineRec	ItemName: string; ItemPrice: Currency; Amount: Integer;	To store OrderItem data to be easily read out when creating receipts.	None
TdbOrders	None	To abstract all the database code away and make it easier to handle.	**Constructor:** Sets up DB connection and tables. **Destructor:** Frees DB connection and tables. Other methods listed under **User Defined Methods.**
THelperFunc	None	To separate methods that are used repeatedly to keep other files cleaner.	**Constructor:** Creates self **Destructor:** Destroys self Other methods listed under **User Defined Methods.**

Task 3: Database Design

Crow's Foot Diagram

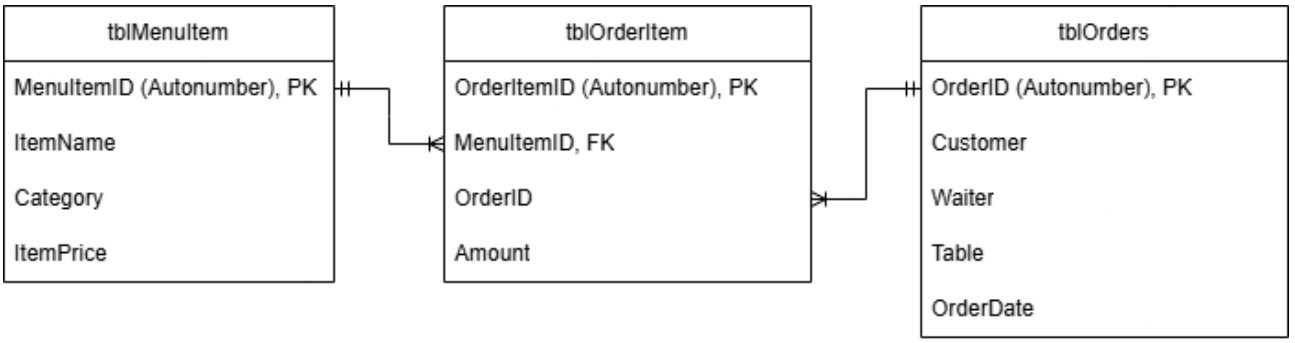

tblMenuItem — menu items

Field	Access data type	Size	Key and requirements	Description
MenuItemID	AutoNumber (Long Integer)	4 bytes	Primary key; not null	Unique identifier for each menu item. It is generated automatically when a record is added.
ItemName	Short Text	40	Required by the application	The name shown in the menu grid and order combo box.
Category	Short Text	20	Required by the application	One of Starters, Mains, Desserts or Drinks.
ItemPrice	Currency	8 bytes	Required by the application; default 0	The selling price in rand. Currency is used to avoid floating-point rounding errors.

tblOrders — order headers

Field	Access data type	Size	Key and requirements	Description
OrderID	AutoNumber (Long Integer)	4 bytes	Primary key; not null	Unique identifier for each order. It is generated automatically.


Customer	Short Text	60	Required by the application	Name of the customer or a short description of the order.
Waiter	Short Text	60	Required by the application	Name of the waiter who captured the order.
Table	Long Integer	4 bytes	Required by the application; default 0	The table number. The name Table is a reserved word in many SQL dialects and should be quoted in SQL; see Section 9.
OrderDate	Date/Time	8 bytes	Required by the application	The date and time at which the order was saved. It is stored as a real date/time value, not as text.

tblOrderItem — order lines

Field	Access data type	Size	Key and requirements	Description
OrderItemID	AutoNumber (Long Integer)	4 bytes	Primary key; not null	Unique identifier for each order line.
MenuItemID	Long Integer	4 bytes	Foreign key to tblMenuItem.MenuItemID	The menu item that was ordered.
OrderID	Long Integer	4 bytes	Foreign key to tblOrders.OrderID	The order to which this line belongs.
Amount	Long Integer	4 bytes	Required by the application; default 0	The quantity ordered. A whole number is appropriate because the restaurant does not sell fractions of a dish.


Task 4: Navigation/GUI

Navigation Diagram

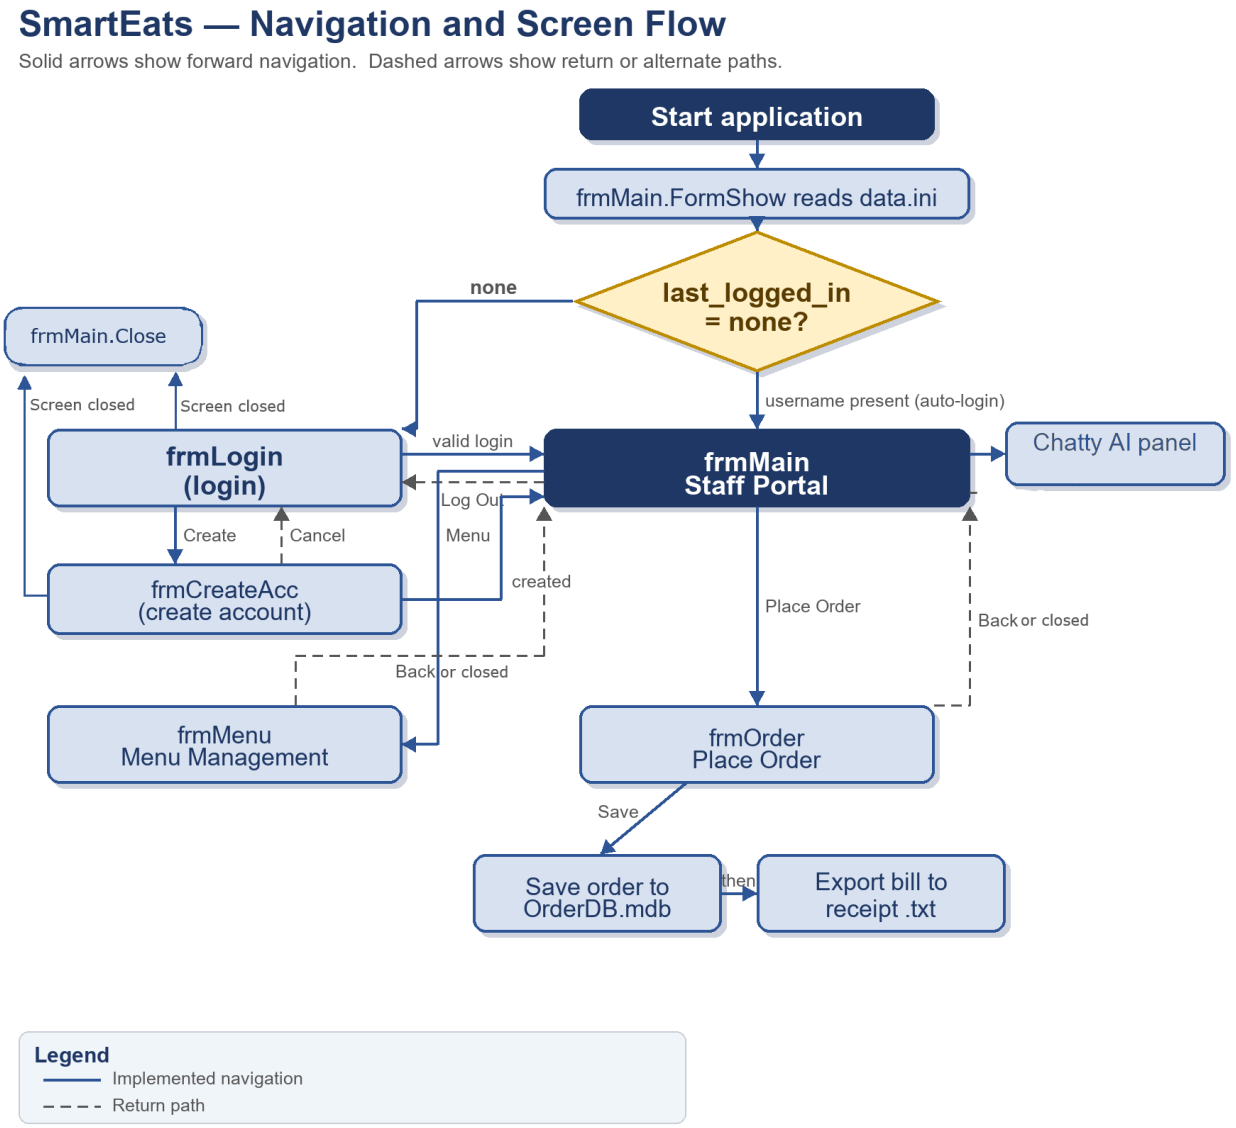


GUI Design

Menu Management screen

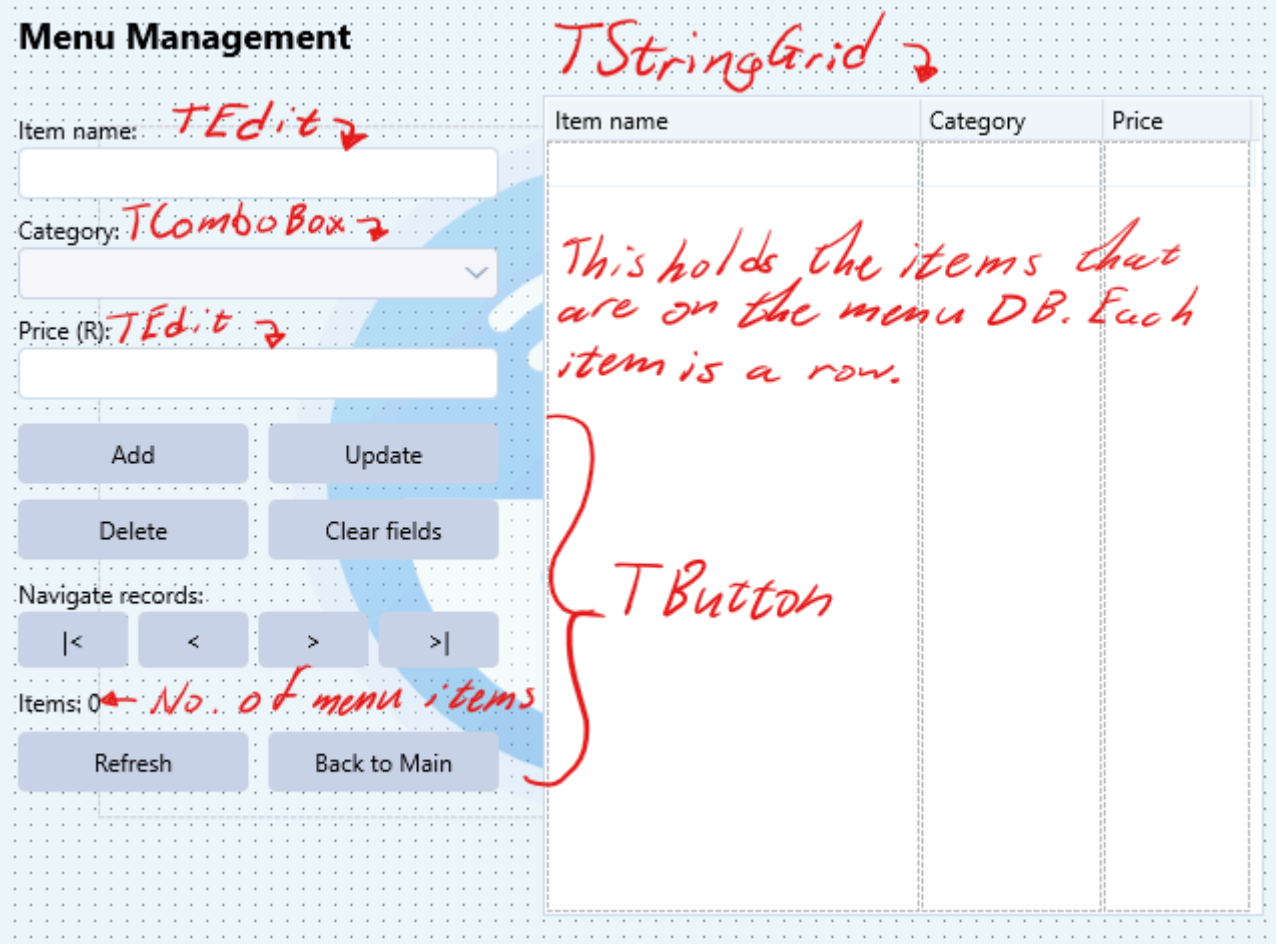

This screen allows the menu of SmartEats to be edited. Items from the menu can be added, edited or, if they are not referenced by any past orders, removed.

Order Placement screen

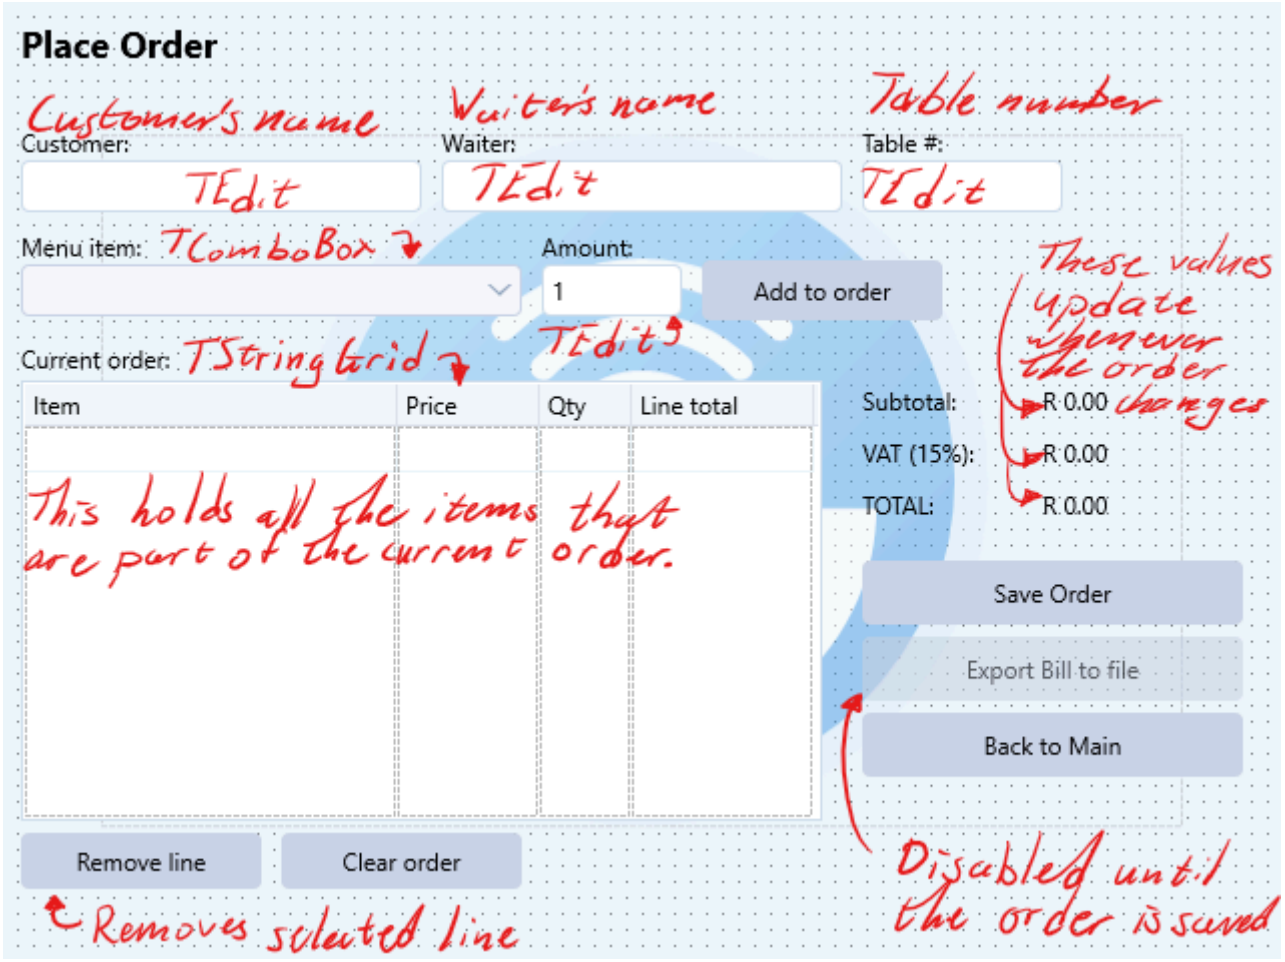

This screen allows an order to be placed. All the relevant fields must be filled in, and items can be added or removed from the current order. Once the order has been saved, it can be exported as a text file to the designated receipts folder.

Task 5: IPO Tables (mean)

INPUT

Login form

Input	Source	Data Type	Format	Component	Validation
Username	Keyboard	String	Free text; must match a stored username	TEdit	Must match a stored account. An empty value fails the comparison. There is no explicit length check.
Password	Keyboard	String	Masked free text	TEdit	The SHA-256 hash must match the stored hash. An empty value fails.
Login file	File system	Text	Line 1 hash; following lines username; hash	TextFile	The SHA-256 hash of the data lines must match the stored hash. A missing or modified file blocks login.

Menu Management form

Input	Source	Data Type	Format	Component	Validation
Item name	Keyboard	String	Letters, digits, spaces, - and +; maximum 40 characters by design	TEdit edtMenuName	Character filter, trim and truncation. There is no explicit empty-field check. The current truncation starts at

					position 40, so up to 39 characters remain.
Category	Selection	String	Starters, Mains, Desserts or Drinks	TComboBox cmbMenuCategory	The list restricts the value. There is no explicit check that a category was selected.
Price	Keyboard	Currency / Real	Digits with at most one comma or full stop as the decimal separator; no leading separator	TEdit edtMenuPrice	Character filter; leading separator removed; only one decimal separator allowed. There is no range or empty-field check.
Selected menu row	Grid selection	Integer ID	Hidden MenuItemID in column 3	TStringGrid grdMenu	A row must be selected for Update or Delete. The current code does not check this explicitly.

Chatty AI panel

Field	Source	Data type	Format	Component	Validation
Prompt	Keyboard	String	Free text; the command /clear clears the response	TMemo memAIInput	The prompt must not be empty. The AI service is not initialised in the current build.

Send command	Keyboard or button	Event	Enter key or Send button	btnSend, memAIInput.OnKeyDown	A non-empty prompt is required. While a response is streaming, the Send button is disabled.

Validation

Validation type	**Where it is applied**	**Rule**	**Behaviour when invalid**
File integrity	Login and Create Account	SHA-256 hash of the data lines must equal the first line.	A critical-error message is shown and the operation stops.
Required / empty	Chatty prompt; login credentials	The prompt must not be empty; empty credentials cannot match a stored account.	The AI send is ignored; login shows "Username or password is incorrect."
Length	Username, password, menu name, customer, waiter, table number, amount	Username 4–21; password 5–21; menu name up to 40; customer/waiter up to 60; table and amount up to 3 digits.	Username and password show messages; other fields are silently truncated.
Character and format	Username, password, names, price, table, amount	Usernames use letters, digits and listed symbols; passwords use letters and digits; names use letters, spaces and hyphens; price uses digits and one decimal separator; table and amount use digits.	The edit filter blocks or removes invalid characters; username and password show messages.
Numeric range	Table number and amount	Maximum 3 digits. No minimum or maximum value is enforced.	Extra digits are removed by the length check; zero and empty

			values are still possible.
Selection	Category, menu item, grid row	A value must be selected from the list or grid.	The combo box restricts the category; there is no explicit message for an unselected menu item or row.
Duplicate	Username	The username must not already exist in the login file.	"Username already taken."
Matching	Password confirmation	The two password fields must be identical.	"Passwords do not match."
Composition	Password	At least one letter and one digit (1–9).	"Password must contain atleast one number and letter."
Referential integrity	tblOrderItem foreign keys	Every order line must refer to an existing order and menu item.	Access/FireDAC raises an error; the program does not currently show a friendly message.
Data-type conversion	StrToInt and StrToFloat calls	The text must be a valid integer or floating-point value.	A runtime exception can occur if the field is empty or invalid; this is a known limitation.
Exception handling	Database connection, file reading, AI streaming	Errors should be caught and reported.	The database constructor and AI stream have handlers; several form-level conversions do not.

Error and feedback messages

Situation	Message or feedback

Incorrect login	"Username or password is incorrect."
Tampered login file during login	"Critical Error: All login details have been compromised." followed by "You will be unable to log in."
Tampered login file during account creation	"Critical Error: All login details have been compromised." followed by "You will be unable to create a new account."
Username too short or too long	"Username must be at least 5 characters long, and no more than 20 charaters long." The code currently accepts 4-21 characters.
Username has an invalid character	"Username may only contain numbers and letters and other acceptable characters: "-", "_", "=", "+", "~", "<", ">", "@", "#", "$", "%", "^", "&", "*""
Passwords do not match	"Passwords do not match."
Password too short or too long	"Password must be at least 6 characters long, and no more than 20 charaters long." The code currently accepts 5-21 characters.
Password has an invalid character	"Password may only contain numbers and letters."
Password lacks a letter or digit	"Password must contain atleast one number and letter."
Username already exists	"Username already taken."
Bill exported	"Bill saved to: "/data/receipts""
Logout confirmation	"Confirmation to log out" with Yes and No buttons.
Database connection failure	"Could not connect to the database ()." followed by the database error.
Menu or order validation	The red lblMenuError and lblOrderError labels exist, but the current code does not set them. This is a planned improvement.

PROCESSING

Processes

Process	Input	Output
Verify the login-file hash	login-details.txt	A Boolean that allows or blocks login and account creation.
Authenticate a user	Username, password, login file	A session username, or an error message.
Create an account	Username, password, confirmation	A new username;hash line, an updated file hash and navigation to the portal.
Persist and restore the session	data.ini	The startup form and the current-user label.
Load the menu	tblMenuItem	Menu grid rows, combo-box items and the index-to-ID array.
Add, update or delete a menu item	Menu fields and selected ID	A changed tblMenuItem table and a reloaded grid.
Add an order line	Selected menu item index and amount	A new element in arrNewOrder and an updated order grid.
Calculate the order totals	arrNewOrder and menu prices	Subtotal, VAT and total labels.
Remove an order line	Selected grid row	A smaller arrNewOrder and updated totals.
Save an order	Customer, waiter, table and arrNewOrder	A new tblOrders row and appended tblOrderItem rows.
Export a receipt	Order ID	A formatted receipt text file.
Navigate menu records	First, Previous, Next or Last command	A new selected row and updated edit fields.
Generate an AI response	User prompt	Streamed text in memAIResponse.

Algorithms

The following algorithms are written in pseudocode close to Delphi.

Verify the login-file hash

```
AssignFile(tFile, sPath)
if not FileExists(sPath) then return False
Reset(tFile)
sFileData := ''
bFirstLine := True
while not Eof(tFile) do
     Readln(tFile, sLine)
     if bFirstLine then
          sHashKey := sLine
     else
          sFileData := sFileData + sLine
     bFirstLine := False
CloseFile(tFile)
sFileHash := SHA256(sFileData)
return (sFileHash = sHashKey)
```

Authenticate a user

```
if not ConfirmFileValidity(LOGIN_DETAILS_PATH) then
     show critical error
     stop
bCredentialsCorrect := False
Reset(tLoginDetails)
while (not Eof(tLoginDetails)) and (not bCredentialsCorrect) do
     Readln(tLoginDetails, sLine)
     iPos := Pos(';', sLine)
     sUsername := Copy(sLine, 1, iPos - 1)
     sPassword := Copy(sLine, iPos + 1, Length(sLine) - iPos)
     sHashedInputPassword := SHA256(edtPasswordLogin.Text)
     if (edtUsernameLogin.Text = sUsername) and
(sHashedInputPassword = sPassword) then
          bCredentialsCorrect := True
CloseFile(tLoginDetails)
if not bCredentialsCorrect then
     show "Username or password is incorrect."
else
     sCurrentUser := edtUsernameLogin.Text
     write last_logged_in to data.ini
     open Staff Portal
```

Save a new order

```
tblOrders.Append
tblOrders.Customer := sCustomer
tblOrders.Waiter := sWaiter
tblOrders.Table := iTableNo
tblOrders.OrderDate := Now
tblOrders.Post
iOrderID := tblOrders.OrderID
for i := 0 to Length(arrOrder) - 1 do
     tblOrderItem.Append
     tblOrderItem.MenuItemID := arrOrder[i][0]
     tblOrderItem.OrderID := iOrderID
     tblOrderItem.Amount := arrOrder[i][1]
     tblOrderItem.Post
enable Export Bill button
```

Remove an order line

```
iRowIndex := grdOrderLines.Row
SetLength(arrOrderTmp, Length(arrNewOrder) - 1)
j := 0
for i := 0 to Length(arrNewOrder) - 1 do
     if i <> iRowIndex then
          arrOrderTmp[j][0] := arrNewOrder[i][0]
          arrOrderTmp[j][1] := arrNewOrder[i][1]
          Inc(j)
SetLength(arrNewOrder, Length(arrOrderTmp))
for i := 0 to Length(arrOrderTmp) - 1 do
     arrNewOrder[i] := arrOrderTmp[i]
UpdateOrderDisplay
```

OUTPUT

Menu Management form

Output	Data	Format	Component
Menu grid	Item name, category, price and hidden ID	Text; price as a number	TStringGrid grdMenu
Menu item count	Integer	"Items: n"	TLabel lblMenuCount

Order Placement form

Output	Data	Format	Component
Order grid	Item, price, quantity and line total	Text; prices and line totals as decimal strings	TStringGrid grdOrderLines
Order totals	Subtotal, VAT and total	Currency with two decimals and an "R" prefix	lblOrderSubtotalValue, lblOrderVatValue, lblOrderTotalValue