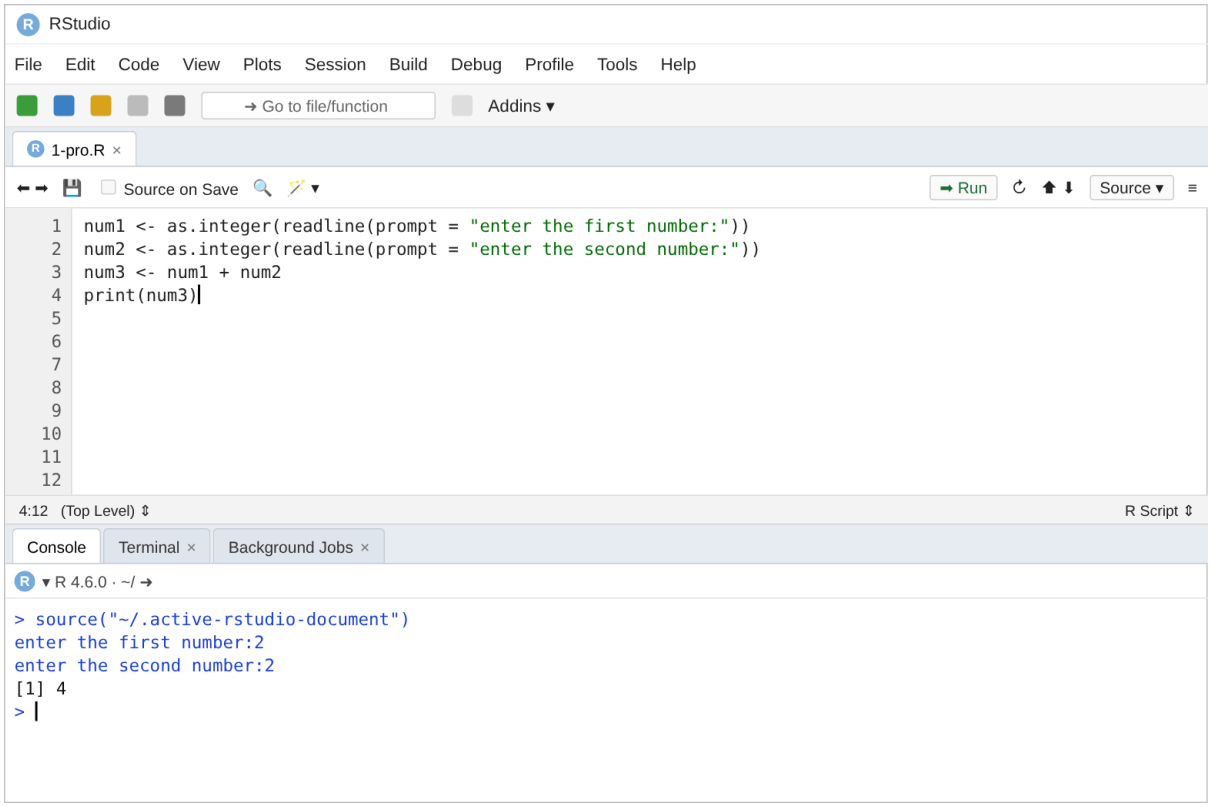
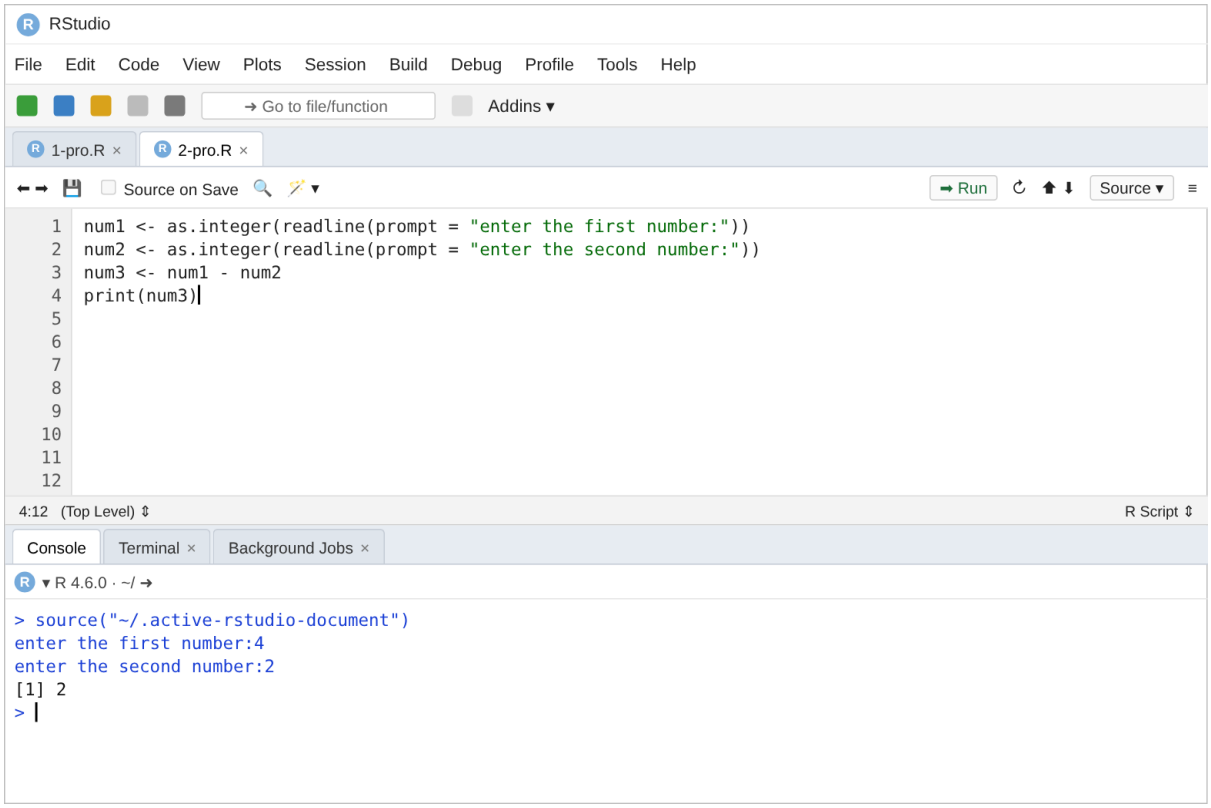

RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Go to file/function
Addins
1-pro.R
Source on Save
Run
Source
1 num1 <- as.integer(readline(prompt = "enter the first number:"))
2 num2 <- as.integer(readline(prompt = "enter the second number:"))
3 num3 <- num1 + num2
4 print(num3)
4:12 (Top Level)
R Script
Console
Terminal
Background Jobs
R 4.6.0 · ~/
> source("~/.active-rstudio-document")
enter the first number:2
enter the second number:2
[1] 4
>


RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Go to file/function
Addins
1-pro.R
2-pro.R
Source on Save
Run
Source
1 num1 <- as.integer(readline(prompt = "enter the first number:"))
2 num2 <- as.integer(readline(prompt = "enter the second number:"))
3 num3 <- num1 - num2
4 print(num3)
4:12 (Top Level)
R Script
Console
Terminal
Background Jobs
R 4.6.0 · ~/
> source("~/.active-rstudio-document")
enter the first number:4
enter the second number:2
[1] 2
>

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function Addins ▾

1-pro.R × 2-pro.R × 3-pro.R ×

Source on Save Run Source ▾

```
1  num1 <- as.integer(readline(prompt = "enter the first number:"))
2  num2 <- as.integer(readline(prompt = "enter the second number:"))
3  num3 <- num1 * num2
4  print(num3)
5
6
7
8
9
10
11
12
```

4:12 (Top Level) ⇕ R Script ⇕

Console Terminal × Background Jobs ×

R ▾ R 4.6.0 · ~/ ➜

```
> source("~/.active-rstudio-document")
enter the first number:3
enter the second number:2
[1] 6
>
```

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function Addins ▾

1-pro.R × 2-pro.R × 3-pro.R × 4-pro.R × 5-pro.R × 6-pro.R ×

Source on Save Run Source ▾

```
1  names <- c("siri", "mahi", "chiru", "loki")
2  age <- c(23, 24, 24, 35)
3  marks <- c(88, 78, 25, 60)
4  df <- data.frame(names, age, marks)
5
6  print(mean(df$age))
7  print(median(df$age))
8
9  getmode <- function(v) {
10   uniq <- unique(v)
11   uniq[which.max(tabulate(match(v, uniq)))]
12 }
13 print(getmode(df$age))
14
15 write.csv(df, "datafr.csv")
16
17
```

15:28 (Top Level) ⇕ R Script ⇕

Console Terminal × Background Jobs ×

R ▾ R 4.6.0 · ~/ ➜

```
> source("~/.active-rstudio-document")
[1] 26.5
[1] 24
[1] 24
>
```

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins ▾

1-pro.R × | 2-pro.R × | 3-pro.R × | 4-pro.R × | 5-pro.R × | 6-pro.R × | 7-pro.R × | 8-pro.R ×

Source on Save | Run | Source ▾

```
1  x <- as.integer(readline(prompt = "Enter first number :"))
2  y <- as.integer(readline(prompt = "Enter second number :"))
3  z <- as.integer(readline(prompt = "Enter third number :"))
4
5  if (x > y && x > z) {
6    print(paste("Greatest is :", x))
7  } else if (y > z) {
8    print(paste("Greatest is :", y))
9  } else {
10   print(paste("Greatest is :", z))
11 }
12
13
```

11:2 (Top Level) ⇕ R Script ⇕

Console | Terminal × | Background Jobs ×

R 4.6.0 · ~/ ➜

```
> source("~/.active-rstudio-document")
Enter first number :5
Enter second number :6
Enter third number :4
[1] "Greatest is : 6"
>
```

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins ▾

2-pro.R × | 3-pro.R × | 4-pro.R × | 5-pro.R × | 6-pro.R × | 7-pro.R × | 8-pro.R × | 9-pro.R ×

Source on Save | Run | Source ▾

```
1  names <- c("siri", "mahi", "chiru", "loki")
2  age <- c(23, 24, 24, 35)
3  marks <- c(88, 78, 25, 60)
4  df <- data.frame(names, age, marks)
5
6  print(IQR(df$age))
7
8  write.csv(df, "datafr.csv")
9
10
11
12
```

8:28 (Top Level) ⇕ R Script ⇕

Console | Terminal × | Background Jobs ×

R 4.6.0 · ~/ ➜

```
> source("~/.active-rstudio-document")
[1] 3
>
```

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins ▾

3-pro.R × | 4-pro.R × | 5-pro.R × | 6-pro.R × | 7-pro.R × | 8-pro.R × | 9-pro.R × | 10-pro.R ×

Source on Save | Run | Source ▾

```
1  names <- c("siri", "mahi", "chiru", "loki")
2  age <- c(23, 24, 24, 35)
3  marks <- c(88, 78, 25, 60)
4  df <- data.frame(names, age, marks)
5
6  print(quantile(df$age))
7
8  write.csv(df, "datafr.csv")
9
10
11
12
```

8:28 (Top Level) ⇕ R Script ⇕

Console | Terminal × | Background Jobs ×

R ▾ R 4.6.0 · ~/ ➜

```
> source("~/.active-rstudio-document")
   0%   25%   50%   75%  100%
23.00 23.75 24.00 26.75 35.00
>
```

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins ▾

4-pro.R × | 5-pro.R × | 6-pro.R × | 7-pro.R × | 8-pro.R × | 9-pro.R × | 10-pro.R × | 11-pro.R ×

Source on Save | Run | Source ▾

```
1  names <- c("siri", "mahi", "chiru", "loki")
2  age <- c(23, 24, 24, 35)
3  marks <- c(88, 78, 25, 60)
4  df <- data.frame(names, age, marks)
5
6  print(range(df$age))
7
8  midrange <- (max(df$age) + min(df$age)) / 2
9  print(midrange)
10
11 write.csv(df, "datafr.csv")
12
13
```

11:28 (Top Level) ⇕ R Script ⇕

Console | Terminal × | Background Jobs ×

R ▾ R 4.6.0 · ~/ ➜

```
> source("~/.active-rstudio-document")
[1] 23 35
[1] 29
>
```

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins ▾

5-pro.R × | 6-pro.R × | 7-pro.R × | 8-pro.R × | 9-pro.R × | 10-pro.R × | 11-pro.R × | 12-pro.R ×

Source on Save | Run | Source ▾

```
1  diabetes <- data.frame(
2    Age = c(50, 31, 32, 21, 33, 30, 26, 29, 53, 54)
3  )
4
5  A <- diabetes$Age
6  Mean <- mean(A)
7  Std <- sd(A)
8  Zscore <- (A - Mean) / Std
9
10 print(Std)
11 print(Zscore)
12
13
```

11:14 (Top Level) ⇕ R Script ⇕

Console | Terminal × | Background Jobs ×

R ▾ R 4.6.0 · ~/ ➜

```
> source("~/.active-rstudio-document")
[1] 11.87387
 [1]  1.1874810 -0.4126707 -0.3284522 -1.2548558 -0.2442337 -0.4968892
 [7] -0.8337633 -0.5811077  1.4401365  1.5243550
> 
```

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins ▾

6-pro.R × | 7-pro.R × | 8-pro.R × | 9-pro.R × | 10-pro.R × | 11-pro.R × | 12-pro.R × | 13-pro.R ×

Source on Save | Run | Source ▾


```
1  diabetes <- data.frame(
2    Age = c(50, 31, 32, 21, 33, 30, 26, 29, 53, 54)
3  )
4
5  A <- diabetes$Age
6
7  print(mean(A))
8  print(min(A))
9  print(max(A))
10
11 MinMax <- (A - min(A)) / (max(A) - min(A))
12 print(MinMax)
13
14
```

12:14 (Top Level) ⇕ R Script ⇕

Console | Terminal × | Background Jobs ×

R ▾ R 4.6.0 · ~/ ➜

```
> source("~/.active-rstudio-document")
[1] 35.9
[1] 21
[1] 54
 [1] 0.8787879 0.3030303 0.3333333 0.0000000 0.3636364 0.2727273 0.1515152
 [8] 0.2424242 0.9696970 1.0000000
> 
```

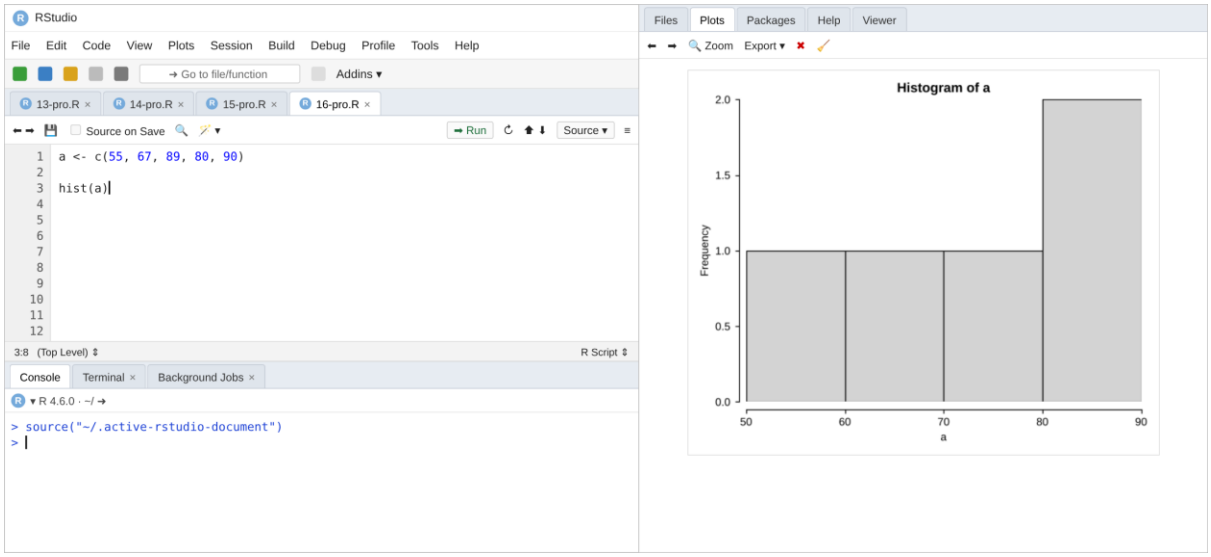

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function Addins

10-pro.R × 11-pro.R × 12-pro.R × 13-pro.R × 14-pro.R × 15-pro.R × 16-pro.R × 17-pro.R ×

Source on Save Run Source


```
1  diabetes <- data.frame(
2    Age = c(50, 31, 32, 21, 33, 30, 26, 29, 53, 54),
3    BloodPressure = c(72, 66, 64, 66, 40, 74, 50, 0, 70, 96),
4    Glucose = c(148, 85, 183, 89, 137, 116, 78, 115, 197, 125)
5  )
6
7  print(cor(diabetes$Age, diabetes$BloodPressure))
8  print(round(cor(diabetes), 3))
9
10
11
12
```


8:31 (Top Level) R Script


Console Terminal × Background Jobs ×


R 4.6.0 · ~/

```
> source("~/.active-rstudio-document")
[1] 0.4908784
                Age BloodPressure Glucose
Age           1.000         0.491    0.61
BloodPressure 0.491         1.000    0.16
Glucose       0.610         0.160    1.00
>
```

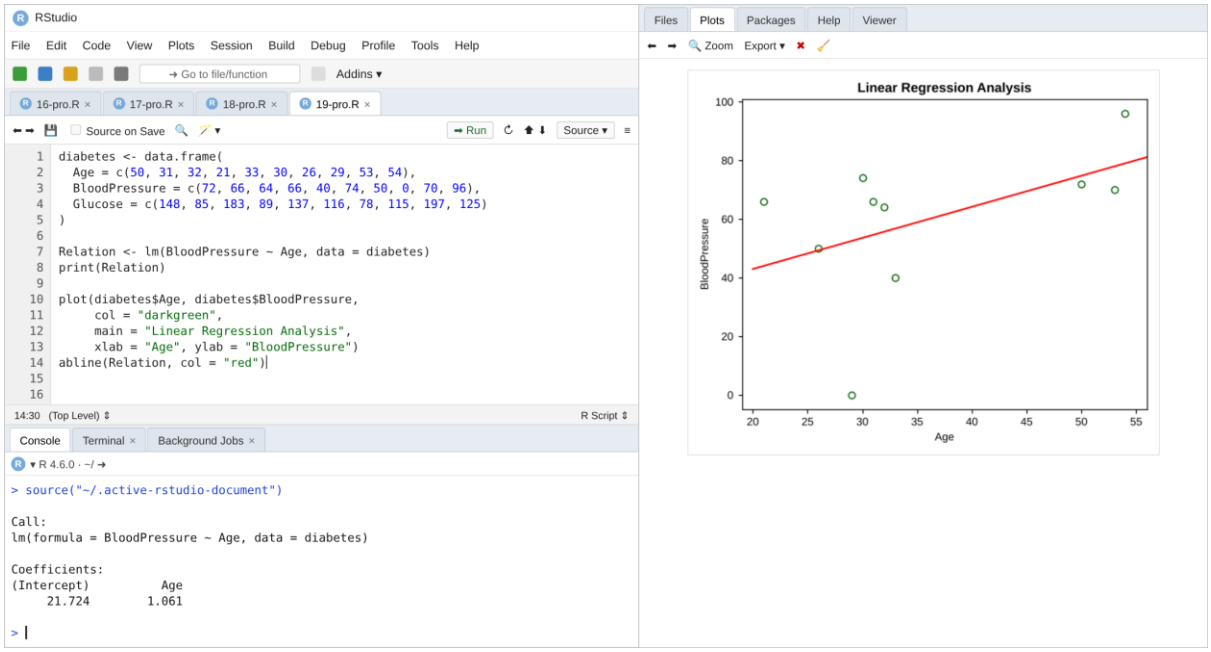
RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Go to file/function
Addins
16-pro.R
17-pro.R
18-pro.R
19-pro.R
Source on Save
Run
Source
diabetes <- data.frame(
Age = c(50, 31, 32, 21, 33, 30, 26, 29, 53, 54),
BloodPressure = c(72, 66, 64, 66, 40, 74, 50, 0, 70, 96),
Glucose = c(148, 85, 183, 89, 137, 116, 78, 115, 197, 125)
)
Relation <- lm(BloodPressure ~ Age, data = diabetes)
print(Relation)
plot(diabetes$Age, diabetes$BloodPressure,
col = "darkgreen",
main = "Linear Regression Analysis",
xlab = "Age", ylab = "BloodPressure")
abline(Relation, col = "red")
14:30 (Top Level)
R Script
Console
Terminal
Background Jobs
R 4.6.0 · ~/
> source("~/.active-rstudio-document")
Call:
lm(formula = BloodPressure ~ Age, data = diabetes)
Coefficients:
(Intercept) Age
21.724 1.061
Files
Plots
Packages
Help
Viewer
Zoom
Export
Linear Regression Analysis
BloodPressure
Age
0
20
40
60
80
100
20
25
30
35
40
45
50
55

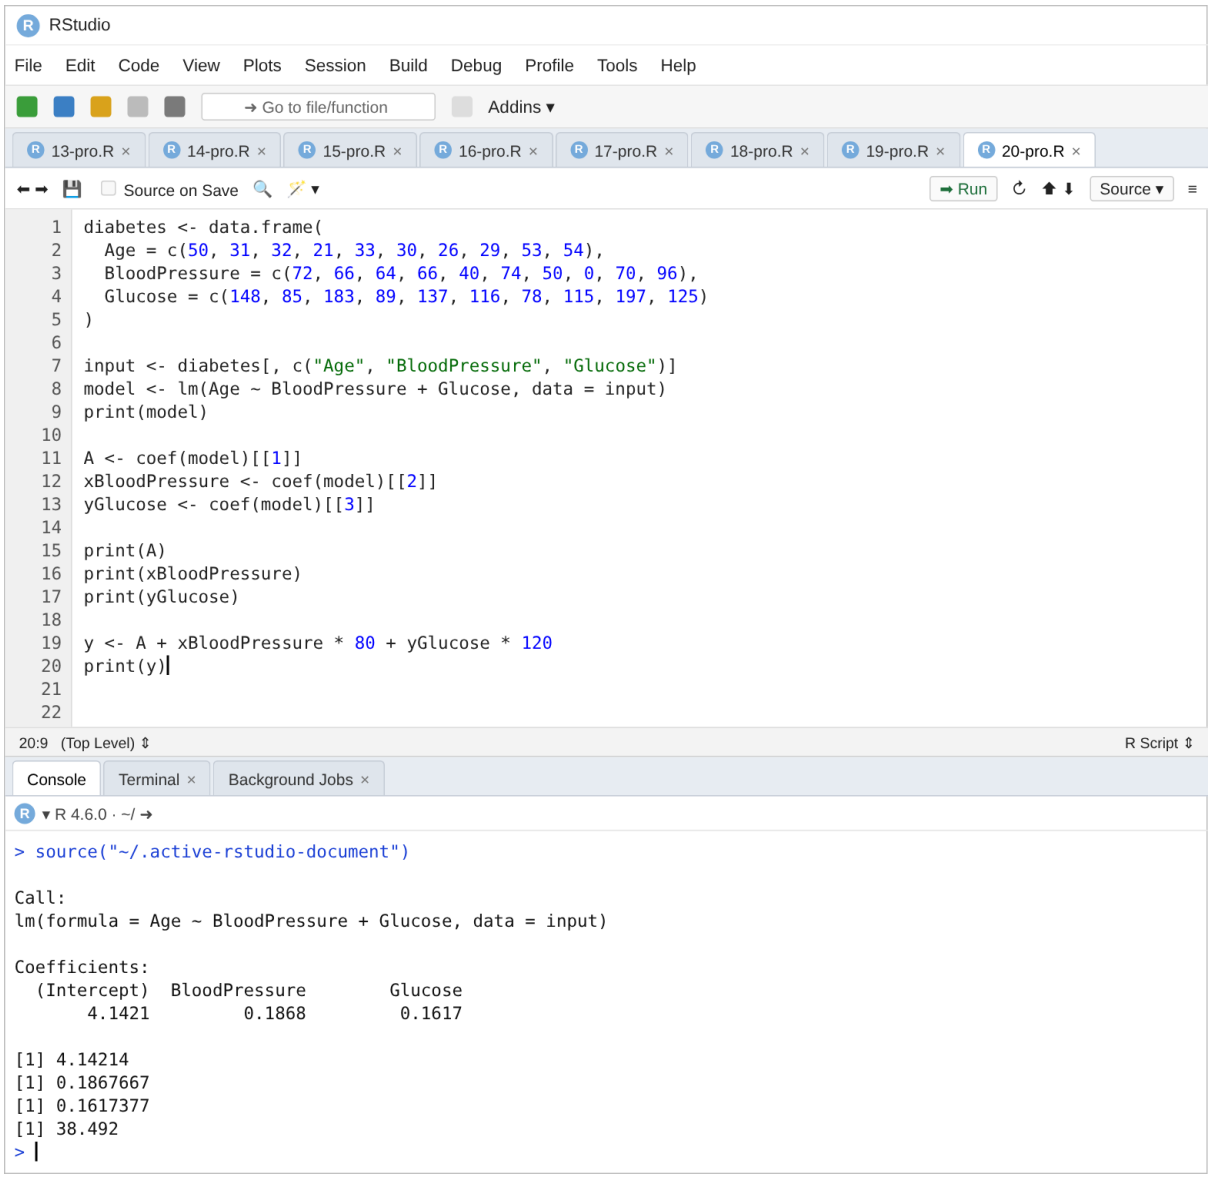
RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Go to file/function
Addins
13-pro.R
14-pro.R
15-pro.R
16-pro.R
17-pro.R
18-pro.R
19-pro.R
20-pro.R
Source on Save
Run
Source
diabetes <- data.frame(
Age = c(50, 31, 32, 21, 33, 30, 26, 29, 53, 54),
BloodPressure = c(72, 66, 64, 66, 40, 74, 50, 0, 70, 96),
Glucose = c(148, 85, 183, 89, 137, 116, 78, 115, 197, 125)
)
input <- diabetes[, c("Age", "BloodPressure", "Glucose")]
model <- lm(Age ~ BloodPressure + Glucose, data = input)
print(model)
A <- coef(model)[[1]]
xBloodPressure <- coef(model)[[2]]
yGlucose <- coef(model)[[3]]
print(A)
print(xBloodPressure)
print(yGlucose)
y <- A + xBloodPressure * 80 + yGlucose * 120
print(y)
20:9 (Top Level)
R Script
Console
Terminal
Background Jobs
R 4.6.0 · ~/
> source("~/.active-rstudio-document")
Call:
lm(formula = Age ~ BloodPressure + Glucose, data = input)
Coefficients:
(Intercept) BloodPressure Glucose
4.1421 0.1868 0.1617
[1] 4.14214
[1] 0.1867667
[1] 0.1617377
[1] 38.492

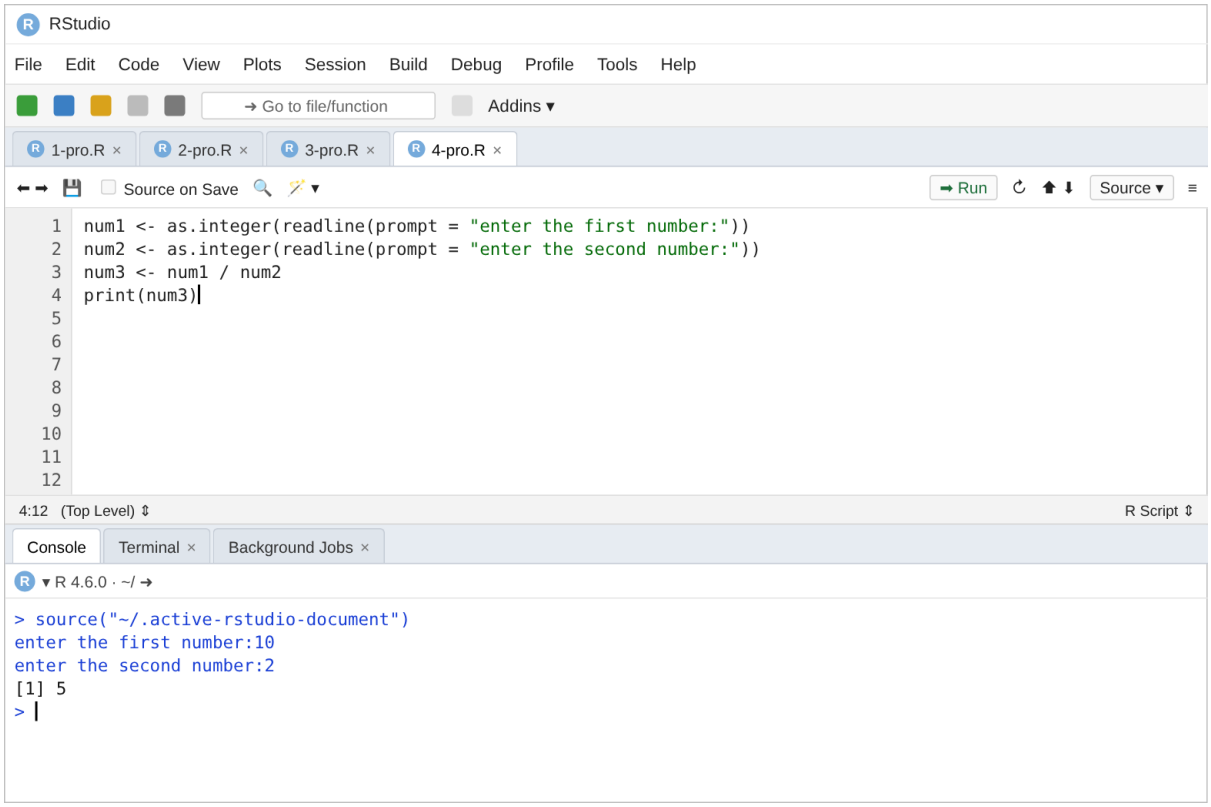
RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Go to file/function
Addins
1-pro.R
2-pro.R
3-pro.R
4-pro.R
Source on Save
Run
Source
num1 <- as.integer(readline(prompt = "enter the first number:"))
num2 <- as.integer(readline(prompt = "enter the second number:"))
num3 <- num1 / num2
print(num3)
4:12 (Top Level)
R Script
Console
Terminal
Background Jobs
R 4.6.0 · ~/
> source("~/.active-rstudio-document")
enter the first number:10
enter the second number:2
[1] 5
>

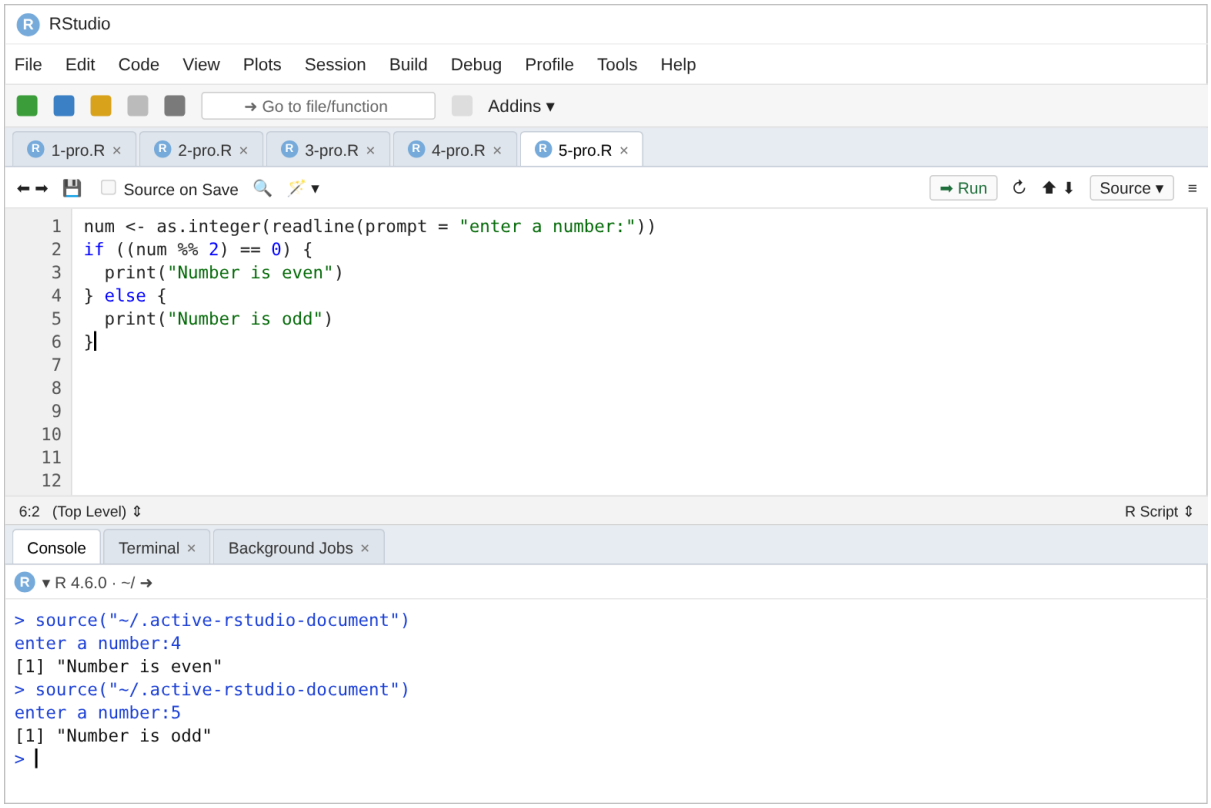
RStudio
File Edit Code View Plots Session Build Debug Profile Tools Help
Go to file/function
Addins
1-pro.R
2-pro.R
3-pro.R
4-pro.R
5-pro.R
Source on Save
Run
Source
num <- as.integer(readline(prompt = "enter a number:"))
if ((num %% 2) == 0) {
print("Number is even")
} else {
print("Number is odd")
}
6:2 (Top Level)
R Script
Console
Terminal
Background Jobs
R 4.6.0 · ~/
> source("~/.active-rstudio-document")
enter a number:4
[1] "Number is even"
> source("~/.active-rstudio-document")
enter a number:5
[1] "Number is odd"
>

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins ▾

1-pro.R × | 2-pro.R × | 3-pro.R × | 4-pro.R × | 5-pro.R × | 6-pro.R × | 7-pro.R ×

Source on Save | Run | Source ▾

```
1  names <- c("siri", "mahi", "chiru", "loki")
2  age <- c(23, 24, 24, 35)
3  marks <- c(88, 78, 25, 60)
4  df <- data.frame(names, age, marks)
5
6  print(summary(df$age))
7
8  write.csv(df, "datafr.csv")
9
10
11
12
```

8:28 (Top Level) ⇕ R Script ⇕

Console | Terminal × | Background Jobs ×

R 4.6.0 · ~/ ➜

```
> source("~/.active-rstudio-document")
   Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
  23.00   23.75   24.00   26.50   26.75   35.00
>
```

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins ▾

11-pro.R × | 12-pro.R × | 13-pro.R × | 14-pro.R ×

Source on Save | Run | Source ▾

```
1  a <- c(55, 67, 89, 80, 90)
2
3  par(mfrow = c(1, 2))
4  barplot(a, main = "Bar Plot", col = "skyblue")
5  barplot(a, horiz = TRUE, main = "Horizontal Bar Plot", col = "skyblue")
6
7
8
9
10
11
12
```

5:72 (Top Level) ⇕ R Script ⇕


Console | Terminal × | Background Jobs ×

R 4.6.0 · ~/ ➜

```
> source("~/.active-rstudio-document")
>
```

Files | Plots | Packages | Help | Viewer

Zoom | Export ▾

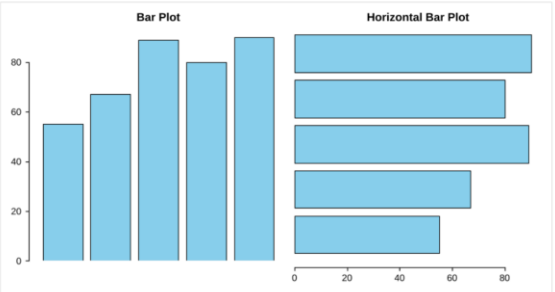

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins ▾

12-pro.R × | 13-pro.R × | 14-pro.R × | 15-pro.R ×

Source on Save | Run | Source ▾

```
1  names <- c("siri", "mahi", "chiru", "loki")
2  age <- c(23, 24, 24, 35)
3  marks <- c(88, 78, 25, 60)
4  df <- data.frame(names, age, marks)
5
6  boxplot(df$age, main = "Box Plot of Age", ylab = "Age", col = "lightblue")
7
8
9
10
11
12
```

6:75 (Top Level) ⇕ R Script ⇕


Console | Terminal × | Background Jobs ×

R 4.6.0 · ~/ ➜

```
> source("~/.active-rstudio-document")
>
```

Files | Plots | Packages | Help | Viewer

Zoom | Export ▾

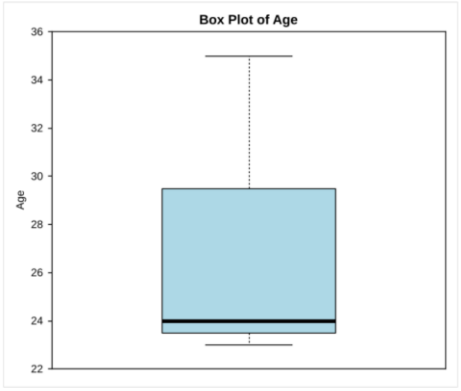

RStudio

File Edit Code View Plots Session Build Debug Profile Tools Help

Go to file/function | Addins ▾

15-pro.R × | 16-pro.R × | 17-pro.R × | 18-pro.R ×

Source on Save | Run | Source ▾

```
1  diabetes <- data.frame(
2    Age = c(50, 31, 32, 21, 33, 30, 26, 29, 53, 54),
3    BloodPressure = c(72, 66, 64, 66, 40, 74, 50, 0, 70, 96),
4    Glucose = c(148, 85, 183, 89, 137, 116, 78, 115, 197, 125)
5  )
6
7  plot(diabetes$Age, diabetes$Glucose,
8       main = "Scatter Plot of Age vs Glucose",
9       xlab = "Age", ylab = "Glucose",
10      col = "blue", pch = 19)
11
12
```

10:29 (Top Level) ⇕ R Script ⇕

Console | Terminal × | Background Jobs ×

R 4.6.0 · ~/ ➜

```
> source("~/.active-rstudio-document")
>
```

Files | Plots | Packages | Help | Viewer

Zoom | Export ▾

