
DOCUMENTS





# Running the Application

**It's finished**! We can test the application. Run the project, **login** as the **host admin** (click Change link and clear tenancy name) shown below:

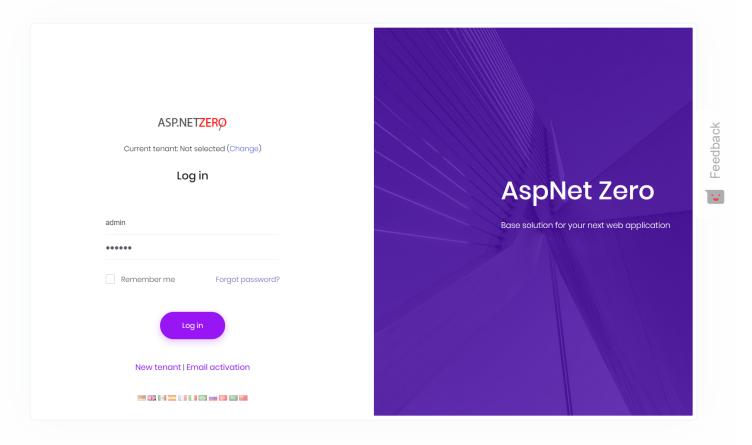


After login, we see the **tenant list** which only contains a **default** tenant. We can create a new tenant:

DOCUMENTS


| Name                                  |   |  |
|---------------------------------------|---|--|
|                                       |   |  |
| ✓ Use host database                   |   |  |
| admin email                           |   |  |
|                                       |   |  |
| ✓ Set random password.                |   |  |
| Edition                               |   |  |
| Standard                              | ~ |  |
| Unlimited time subscription           |   |  |
| Subscription end date                 |   |  |
|                                       |   |  |
| Is in trial period?                   |   |  |
| Should change password on next login. |   |  |
| Send activation email.                |   |  |
| ✓ Active                              |   |  |
|                                       |   |  |

I created a new tenant named **trio**. Now, tenant list has two tenants:

DOCUMENTS

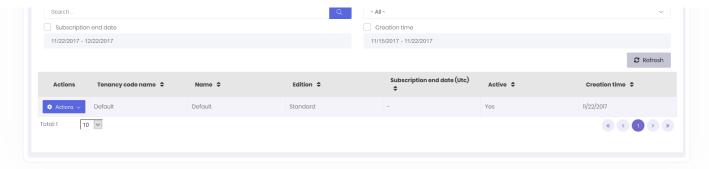

I can **logout** and login as **trio** tenant **admin** (Change current tenant to trio):

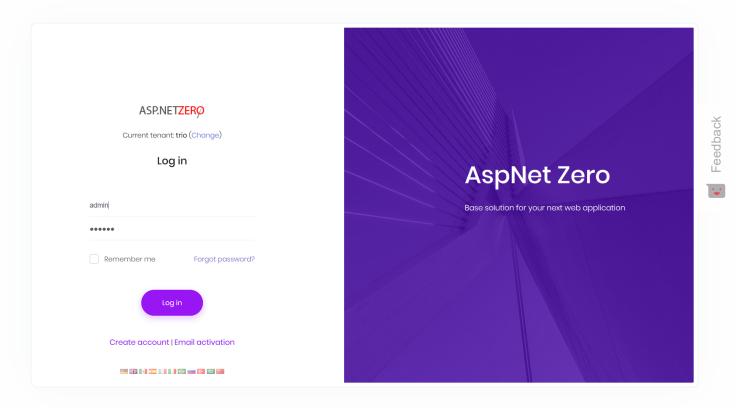

After login, we see that phone book is empty:

DOCUMENTS



It's empty because trio tenant has a completely isolated people list. You can add people here, logout and login as different tenants (you can login as default tenant for example). You will see that each tenant has an isolated phone book and can not see other's people.

# **Next**

• Conclusion

Feedback