

# Computer Systems Security

## exercises

Henrik Lund Kramshoej  
hlk@zencurity.com

May 2, 2019



# Contents

<b>1</b>	<b>Download Kali Linux Revealed (KLR) Book 10 min</b>	<b>2</b>
<b>2</b>	<b>Check your Kali VM, run Kali Linux 30 min</b>	<b>3</b>
<b>3</b>	<b>Check your Debian VM 10 min</b>	<b>4</b>
<b>4</b>	<b>Investigate /etc 10 min</b>	<b>5</b>
<b>5</b>	<b>Discover active systems ping sweep 10 min</b>	<b>7</b>
<b>6</b>	<b>Execute nmap TCP and UDP port scan 20 min</b>	<b>8</b>
<b>7</b>	<b>Perform nmap OS detection 10 min</b>	<b>9</b>
<b>8</b>	<b>Run Armitage - Hail Mary 30min</b>	<b>10</b>
<b>9</b>	<b>SELinux Introduction up to 60min</b>	<b>12</b>
<b>10</b>	<b>Example AUPs up to 30min</b>	<b>16</b>

## Preface

This material is prepared for use in *Computer Systems Security workshop* and was prepared by Henrik Lund Kramshøj, <http://www.zencurity.com> . It describes the networking setup and applications for trainings and workshops where hands-on exercises are needed.

Further a presentation is used which is available as PDF from [kramse@Github](mailto:kramse@Github)  
Look for system-security-exercises in the repo *security-courses*.

These exercises are expected to be performed in a training setting with network connected systems. The exercises use a number of tools which can be copied and reused after training. A lot is described about setting up your workstation in the repo

<https://github.com/kramse/kramse-labs>

## Prerequisites

This material expects that participants have a working knowledge of TCP/IP from a user perspective. Basic concepts such as web site addresses and email should be known as well as IP-addresses and common protocols like DHCP.

Have fun and learn

## Exercise content


Most exercises follow the same procedure and has the following content:

- **Objective:** What is the exercise about, the objective
- **Purpose:** What is to be the expected outcome and goal of doing this exercise
- **Suggested method:** suggest a way to get started
- **Hints:** one or more hints and tips or even description how to do the actual exercises
- **Solution:** one possible solution is specified
- **Discussion:** Further things to note about the exercises, things to remember and discuss

Please note that the method and contents are similar to real life scenarios and does not detail every step of doing the exercises. Entering commands directly from a book only teaches typing, while the exercises are designed to help you become able to learn and actually research solutions.

## Exercise 1

### Download Kali Linux Revealed (KLR) Book 10 min

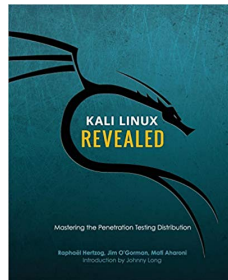

*Kali Linux Revealed Mastering the Penetration Testing Distribution*

**Objective:**

We need a Kali Linux for running tools during the course. This is open source, and the developers have released a whole book about running Kali Linux.

This is named Kali Linux Revealed (KLR)

**Purpose:**

We need to install Kali Linux in a few moments, so better have the instructions ready.

**Suggested method:**

Create folders for educational materials. Go to <https://www.kali.org/download-kali-linux-revealed-book/> Read and follow the instructions for downloading the book.

**Solution:**

When you have a directory structure for download for this course, and the book KLR in PDF you are done.

**Discussion:**


Linux is free and everywhere. The tools we will run in this course are made for Unix, so they run great on Linux.

Kali Linux is a free pentesting platform, and probably worth more than \$10.000

The book KLR is free, but you can buy/donate, and I recommend it.

## Exercise 2

### Check your Kali VM, run Kali Linux 30 min

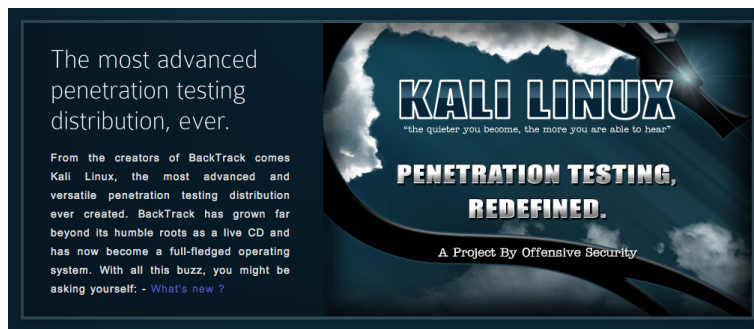

#### Objective:

Make sure your virtual machine is in working order.

We need a Kali Linux for running tools during the course.

#### Purpose:

If your VM is not installed and updated we will run into trouble later.

#### Suggested method:

Go to <https://github.com/kramse/kramse-labs/>

Read the instructions for the setup of a Kali VM.

#### Hints:

If you allocate enough memory and disk you won't have problems.

#### Solution:

When you have a updated virtualisation software and Kali Linux, then we are good.

#### Discussion:

Linux is free and everywhere. The tools we will run in this course are made for Unix, so they run great on Linux.

Kali Linux includes many hacker tools and should be known by anyone working in infosec.

## Exercise 3

### Check your Debian VM 10 min



**Objective:**

Make sure your virtual Debian 9 machine is in working order.

We need a Debian 9 Linux for running a few extra tools during the course.

**This is a bonus exercise - only one Debian is needed per team.**

**Purpose:**

If your VM is not installed and updated we will run into trouble later.

**Suggested method:**

Go to <https://github.com/kramse/kramse-labs/>

Read the instructions for the setup of a Kali VM.

**Hints:**

**Solution:**

When you have a updated virtualisation software and Kali Linux, then we are good.

**Discussion:**

Linux is free and everywhere. The tools we will run in this course are made for Unix, so they run great on Linux.

## Exercise 4

### Investigate /etc 10 min

#### Objective:

We will investigate the /etc directory on Linux

We need a Debian 9 Linux and a Kali Linux, to compare

#### Purpose:

Start seeing example configuration files, including:

- User database /etc/passwd and /etc/group
- The password database /etc/shadow

#### Suggested method:

Boot your Linux VMs, log in

Investigate permissions for the user database files passwd and shadow

#### Hints:

Linux has many tools for viewing files, the most efficient would be less.

```
hlk@debian:~$ cd /etc
hlk@debian:/etc$ ls -l shadow passwd
-rw-r--r-- 1 root root  2203 Mar 26 17:27 passwd
-rw-r----- 1 root shadow 1250 Mar 26 17:27 shadow
hlk@debian:/etc$ ls
... all files and directories shown, investigate more if you like
```

Showing a single file: less /etc/passwd and press q to quit

Showing multiple files: less /etc/\* then :n for next and q for quit

Trying reading the shadow file as your regular user:

```
user@debian-9-lab:/etc$ cat /etc/shadow
cat: /etc/shadow: Permission denied
```

Why is that? Try switching to root, using su or sudo, and redo the command.



**Solution:**


When you have seen the most basic files you are done.

**Discussion:**

Linux is free and everywhere. The tools we will run in this course are made for Unix, so they run great on Linux.

## Exercise 5

### Discover active systems ping sweep 10 min



#### Objective:

Use nmap to discover active systems

#### Purpose:

Know how to use nmap to scan networks for active systems.

#### Suggested method:

Try different scans,

- Ping sweep to find active systems
- Port sweeps to find active systems with specific ports

#### Hints:

Try nmap in sweep mode - and you may run this from Zenmap

#### Solution:

Use the command below as examples:

- Ping sweep `nmap -sP 10.0.45.*`
- Port sweeps `nmap -p 80 10.0.45.*`

#### Discussion:

Quick scans quickly reveal interesting hosts, ports and services

Also now make sure you understand difference between single host scan 10.0.45.123/32, a whole subnet /24 250 hosts 10.0.45.0/24 and other more advanced targeteting like 10.0.45.0/25 and 10.0.45.1-10

## Exercise 6

### Execute nmap TCP and UDP port scan 20 min

**Objective:**

Use nmap to discover important open ports on active systems

**Purpose:**

Finding open ports will allow you to find vulnerabilities on these ports.

**Suggested method:**

Use `nmap -p 1-1024 server` to scan the first 1024 TCP ports and use Nmap without ports. What is scanned then?

Try to use `nmap -sU` to scan using UDP ports, not really possible if a firewall is in place.

If a firewall blocks ICMP you might need to add `-Pn` to make nmap scan even if there are no Ping responses

**Hints:**

Sample command: `nmap -Pn -sU -p1-1024 server` UDP port scanning 1024 ports without doing a Ping first

**Solution:**

Discover some active systems and most interesting ports, which are 1-1024 and the built-in list of popular ports.

**Discussion:**

There is a lot of documentation about the nmap portscanner, even a book by the author of nmap. Make sure to visit <http://www.nmap.org>

TCP and UDP is very different when scanning. TCP is connection/flow oriented and requires a handshake which is very easy to identify. UDP does not have a handshake and most applications will not respond to probes from nmap. If there is no firewall the operating system will respond to UDP probes on closed ports - and the ones that do not respond must be open.

When doing UDP scan on the internet you will almost never get a response, so you cannot tell open (not responding services) from blocked ports (firewall drop packets). Instead try using specific service programs for the services, sample program could be `nsping` which sends DNS packets, and will often get a response from a DNS server running on UDP port 53.

## Exercise 7

### Perform nmap OS detection 10 min

**Objective:**

Use nmap OS detection and see if you can guess the brand of devices on the network

**Purpose:**

Getting the operating system of a system will allow you to focus your next attacks.

**Suggested method:**

Look at the list of active systems, or do a ping sweep.

Then add the OS detection using the option `-O`

Better to use `-A` all the time, includes even more scripts and advanced stuff See the next exercise.

**Hints:**

The nmap can send a lot of packets that will get different responses, depending on the operating system. TCP/IP is implemented using various constants chosen by the implementors, they have chosen different standard packet TTL etc.

**Solution:**

Use a command like `nmap -O -p1-100 10.0.45.45` or `nmap -A -p1-100 10.0.45.45`

**Discussion:**

nmap OS detection is not a full proof way of knowing the actual operating system, but in most cases it can detect the family and in some cases it can identify the exact patch level of the system.

## Exercise 8

### Run Armitage - Hail Mary 30min

**Objective:**

Try hacking using a graphical program, see how quick and easy it can be.

**Purpose:**

Show that when a vulnerability exist attacks can be quick and easy.

**Suggested method:**

Running Armitage as a gui on top of Metasploit is the easiest way to do this.

1. Boot up Kali Linux
2. Boot up Metasploitable - from ISO  
There may be a couple of systems already running this.
3. Run Armitage Hail-Mary against Metasploitable
4. Note which succeeded, describe those attacks that succeeded in relation to MITRE ATT&CK framework

**Hints:**

Running Metasploit against Metasploitable - which is a vulnerable system - should result in multiple vulnerabilities exploited.

Each of these may have different characteristics.

We are aiming at:

- Vulnerable application - root access
- Vulnerable application - non-root access, would need privilege escalation
- Bad password allowing Brute Force access, msfadmin/msfadmin - see also *Valid Accounts*

**Solution:**

When you have exploited and mapped at least one vulnerability you are done, but should spend more time.

**Discussion:**

Do we need these frameworks? What are the benefits? - can we become product blind - so we only see what these framework cover.

## Exercise 9

### SELinux Introduction up to 60min

**Objective:**

Check out the SELinux system

<https://www.debian.org/doc/manuals/debian-handbook/sect.selinux.en.html>

and the setup instructions at:

<https://wiki.debian.org/SELinux/Setup>

(Not working right now - Create a secret file, that you can read, but root cant.)

**Purpose:**

Everybody reads about Discretionary Access Control (DAC) and Mandatory Access Control (MAC) but few realize that Linux implements it.

**Suggested method:**

Try enabling and disabling the policies in your Debian VM.

First install prerequisites - approx 75MB download on my system:

```
apt-get install selinux-basics selinux-policy-default auditd
```

Then run activation of SELinux:

```
selinux-activate
```

```
root@debian-9-lab:~# selinux-activate
Activating SE Linux
Generating grub configuration file ...
Found linux image: /boot/vmlinuz-4.9.0-9-amd64
Found initrd image: /boot/initrd.img-4.9.0-9-amd64
Found linux image: /boot/vmlinuz-4.9.0-8-amd64
Found initrd image: /boot/initrd.img-4.9.0-8-amd64
done
SE Linux is activated. You may need to reboot now.
root@debian-9-lab:~#
```

Perform the reboot, `shutdown -r now` then check again.

Not enabled will show this, try again:

```
root@debian-9-lab:~# sestatus
SELinux status: disabled
```

Enabled, but not the current mode and mode from config file discrepancy:

```
root@debian:~# sestatus
SELinux status:                enabled
SELinuxfs mount:              /sys/fs/selinux
SELinux root directory:       /etc/selinux
Loaded policy name:            default
Current mode:                  enforcing
Mode from config file:         permissive
Policy MLS status:             enabled
Policy deny_unknown status:    allowed
Max kernel policy version:     30
```

While playing I had changed the mode temporarily to *enforcing*! Next reboot would make SELinux run in the more *permissive* mode

### 9.0.1 Part 2 - do this when SELinux is enabled

Create a directory and a test file:

```
root@debian:~# setenforce 0    // set mode permissive!
root@debian:~# cd
root@debian:~# mkdir /etc/private
root@debian:~# echo "hey" > /etc/private/README
root@debian:~# cat /etc/private/test1
hey
root@debian:~#
```

Root can read the file, yay!

Copy example files:

```
cp -r /usr/share/doc/selinux-policy-dev/examples .
cd examples/
```

Create a file `myprivate.te` with this content:

```
policy_module(myprivate, 1.0)

#####
#
# Declarations
#
type etc_private_t;
```



```
fs_associate(etc_private_t)

type sysadm_t;
type sysadm_exec_t;

userdom_admin_user_template(sysadm_t)

allow sysadm_t etc_private_t:dir file relabelto;
```

**Note last line is missing a sysadm domain, does not work.**

Then compile this, make myprivate.pp:

```
root@debian:~/examples# make myprivate.pp
Compiling default myprivate module
/usr/bin/checkmodule: loading policy configuration from tmp/myprivate.tmp
/usr/bin/checkmodule: policy configuration loaded
/usr/bin/checkmodule: writing binary representation (version 17) to tmp/myprivate.mod
Creating default myprivate.pp policy package
rm tmp/myprivate.mod.fc tmp/myprivate.mod
root@debian:~/examples#
```

then it should have been possible to enable/disable enforcing mode, and see the file becoming unreadable - even by root.

Something is wrong, when enabling enforcing mode, the chcon command fails:

```
root@debian:~/examples# setenforce 1
root@debian:~/examples# chcon -R -t etc_private_t /etc/private/README
chcon: failed to change context of '/etc/private/README' to 'system_u:object_r:etc_private_t:s0'
root@debian:~/examples# chcon -R -t etc_private_t /etc/private
chcon: failed to change context of 'README' to 'system_u:object_r:etc_private_t:s0': Invalid a
chcon: failed to change context of '/etc/private' to 'system_u:object_r:etc_private_t:s0': Inv

root@debian:~/examples# setenforce 0
root@debian:~/examples# chcon -R -t etc_private_t /etc/private/README
root@debian:~/examples#
// When Linux returns to the command prompt without messages no errors were observed
```

**So SELinux IS preventing us from doing it :-D**

this example is in parts based on this blog post:

<http://blog.siphos.be/2015/07/restricting-even-root-access-to-a-folder/>

#### Hints:

Keeping SELinux enabled may NOT be a good idea, since some tools may not work correctly, until policies are downloaded, written or installed.

**Temporarily disable SELinux:**

```
echo 0 > /sys/fs/selinux/enforce
```

**Temporarily enable SELinux:**

```
echo 1 > /sys/fs/selinux/enforce
```

or use the command `setenforce 0` or `setenforce 1`

The main config for setting permissive or enforcing mode is `/etc/selinux/config`:

```
root@debian-9-lab:~# cat /etc/selinux/config
# This file controls the state of SELinux on the system.
# SELINUX= can take one of these three values:
# enforcing - SELinux security policy is enforced.
# permissive - SELinux prints warnings instead of enforcing.
# disabled - No SELinux policy is loaded.
SELINUX=permissive
# SELINUXTYPE= can take one of these two values:
# default - equivalent to the old strict and targeted policies
# mls      - Multi-Level Security (for military and educational use)
# src      - Custom policy built from source
SELINUXTYPE=default

# SETLOCALDEFS= Check local definition changes
SETLOCALDEFS=0
```

**Solution:**

When you have enabled and seen the commands used, you are done.

It is easy to have multiple hours disappear when working with SELinux.

**Discussion:**

Yes, the root user can disable the SELinux protection :-D

I had Firefox crash at least once during this exercise, so beware - fancy and bigger applications may crash when using this!

## Exercise 10

### Example AUPs up to 30min

**Objective:**

See real world high level policies

**Purpose:**

When writing your first policy it may be hard to know what to include. Starting from an example is often easier.

**Suggested method:**

Find your AUP for the ISPs we use, you use, your company uses.

**Hints:**

Policies for different environments are often very different in scope and goals.

Book mentions military and commercial, but an ISP, University and a commercial enterprise have very different methods and requirements.

Example, how do you handle BYOD Bring your own devices, University you expect students to bring them, in a secure enterprise only company devices may be allowed.

**Solution:**

When you have seen at least two different policies you are done.

**Discussion:**

How do you both write AND create awareness about a policy?