



Welcome to

11. Forensics 2: Incident Response

KEA Kompetence Computer Systems Security 2019

Henrik Lund Kramshøj hlk@zencurity.com @kramse  

Slides are available as PDF, kramse@Github
11-forensics-incident-response.tex in the repo security-courses

Plan for today



Subjects

- Attack and Response
- Attack graphs
- Attack surfaces, and reducing them
- Intrusion Handling, phases
- Digital Forensics

Exercises

- Clean or rebuild a server, use example Debian with your cron job vuln as example
- Cloud environments influence on incident response

Reading Summary



Bishop chapter 27

Incident Handler's Handbook - ca 18 pages

Browse / skim this:

Attack and Response



Definition 27-1 *Attack* is a sequence of actions that create a violation of a security policy.

Definition 27-2 A *goal* is that which the attacker hopes to achieve.


Definition 27-3 A *target* of an attack is the entity that the attacker wishes to affect.

Definition 27-4 A *multistage attack* is an attack that requires several steps to achieve its goal.

Most attacks are multistage.

Example goals: access to systems for learning, stealing, for spamming, for embarrassment

Attack trees

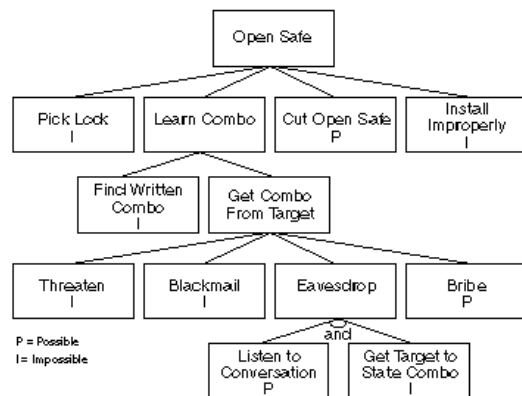

- Attacks can be said to be based on a chain of dependencies, or graphs
- To achieve goal, need to achieve sub goal x, y, and z – Break the chain and the attack fails!
- Simple example, installing updates remove a dependency for a vulnerability
- Attack trees, picture from:

https://www.schneier.com/academic/archives/1999/12/attack_trees.html

Attack surfaces, and reducing them



- Incident prevention
- Real-time intrusion detection systems (IDS/IPS)
- **Definition 27-7** An *attack surface* is the set of entry points and data that attackers can use to compromise a system.
- Address space layout randomization (ASLR) is a host-level moving target defense.
- OpenBSD even randomizes the kernel on install – kernel address randomized link (KARL)

Remember the MITRE ATT&CK framework



MITRE ATT&CK™ is a globally-accessible knowledge base of adversary tactics and techniques based on real-world observations. The ATT&CK knowledge base is used as a foundation for the development of specific threat models and methodologies in the private sector, in government, and in the cybersecurity product and service community.

With the creation of ATT&CK, MITRE is fulfilling its mission to solve problems for a safer world — by bringing communities together to develop more effective cybersecurity. ATT&CK is open and available to any person or organization for use at no charge.

ATT&CK™

<https://attack.mitre.org/>

Penetration testing



Verification of the system in place

Examines procedural and operational controls

Is the system in fact installed and operated as expected

Example, is the firewall even enabled?

Penetration testing methodologies

https://www.owasp.org/index.php/Penetration_testing_methodologies

Security Assessment Frameworks



- Structured approach to testing, finding and eliminating security flaws
- Information Systems Security Assessment Framework ISSAF
- Penetration Testing Execution Standard (PTES)
- PCI Penetration testing guide, Payment Card Industry Data Security Standard (PCI DSS)
- Technical Guide to Information Security Testing and Assessment (NIST800-115) (GISTA)
- Open Source Security Testing Methodology Manual (OSSTMM)
- CREST Penetration Testing Guide

Which one to choose?

From the book Bishop and https://www.owasp.org/index.php/Penetration_testing_methodologies

Intrusion Handling, phases



- *Preparation* for an attack, establish procedures and mechanisms for detecting and responding to attacks
- *Identification* of an attack, notice the attack is ongoing
- *Containment* (confinement) of the attack, limit effects of the attack as much as possible
- *Eradication* of the attack, stop attacker, block further similar attacks
- *Recovery* from the attack, restore system to a secure state
- *Follow-up* to the attack, include lessons learned – improve environment

These are very high-level. Multiple books and courses exist on this subject alone. A short example for today was the *Incident Handler's Handbook* by Patrick Kral

Honeypot Definition



In computer terminology, a **honeypot** is a computer security mechanism set to detect, deflect, or, in some manner, counteract attempts at unauthorized use of information systems. Generally, a honeypot consists of data (for example, in a network site) that appears to be a legitimate part of the site, but is actually isolated and monitored, and that seems to contain information or a resource of value to attackers, who are then blocked.

Source: [https://en.wikipedia.org/wiki/Honeypot_\(computing\)](https://en.wikipedia.org/wiki/Honeypot_(computing))


also used as HoneyNet - monitored network infrastructure

En honeypot består typisk af:

- Et eller flere sårbare systemer
- Et eller flere systemer der logger trafik til og fra honeypot systemerne

Meningen med en honeypot er at den bliver angrebet og brudt ind i, se også Canary Tokens

History of honeypots – An Evening with Berferd

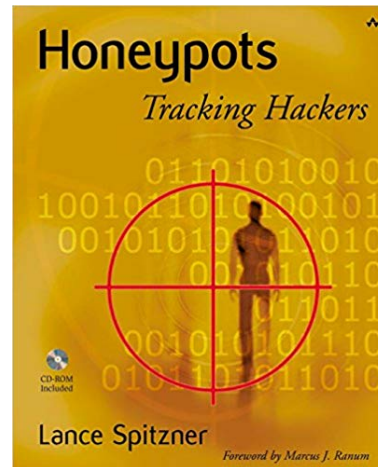

Artikel om en hacker der lokkes, vurderes, overvåges

Et tidligt eksempel på en honeypot

Senere kom The HoneyNet Project <http://www.honeynet.org>

Billede er: *Honeypots: Tracking Hackers* af Lance Spitzner, 2003

Honeypot Definition



In computer terminology, a **honeypot** is a computer security mechanism set to detect, deflect, or, in some manner, counteract attempts at unauthorized use of information systems. Generally, a honeypot consists of data (for example, in a network site) that appears to be a legitimate part of the site, but is actually isolated and monitored, and that seems to contain information or a resource of value to attackers, who are then blocked.

Source: [https://en.wikipedia.org/wiki/Honeypot_\(computing\)](https://en.wikipedia.org/wiki/Honeypot_(computing))


also used as Honeynet - monitored network infrastructure

En honeypot består typisk af:

- Et eller flere sårbare systemer
- Et eller flere systemer der logger trafik til og fra honeypot systemerne

Meningen med en honeypot er at den bliver angrebet og brudt ind i, se også Canary Tokens

History of honeypots – An Evening with Berferd

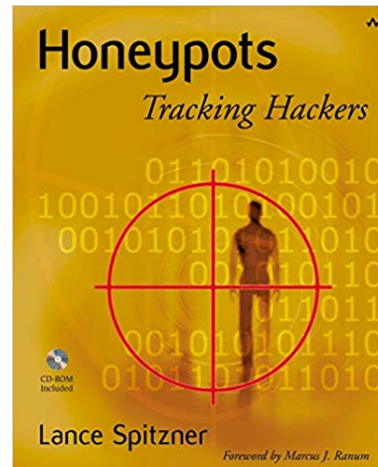

Artikel om en hacker der lokkes, vurderes, overvåges

Et tidligt eksempel på en honeypot

Senere kom The HoneyNet Project <http://www.honeynet.org>

Billede er: *Honeypots: Tracking Hackers* af Lance Spitzner, 2003

Honeytrap High interaction and low interaction




High-interaction honeypots imitate the activities of the production systems that host a variety of services and, therefore, an attacker may be allowed a lot of services to waste their time. By employing virtual machines, multiple honeypots can be hosted on a single physical machine. Therefore, even if the honeypot is compromised, it can be restored more quickly. In general, high-interaction honeypots provide more security by being difficult to detect, but they are expensive to maintain. If virtual machines are not available, one physical computer must be maintained for each honeypot, which can be exorbitantly expensive. Example: HoneyNet.

Low-interaction honeypots simulate only the services frequently requested by attackers. Since they consume relatively few resources, multiple virtual machines can easily be hosted on one physical system, the virtual systems have a short response time, and less code is required, reducing the complexity of the virtual system's security. Example: Honeyd.

Source: [https://en.wikipedia.org/wiki/Honeytrap_\(computing\)](https://en.wikipedia.org/wiki/Honeytrap_(computing))

Honeynets - Why use them research, production

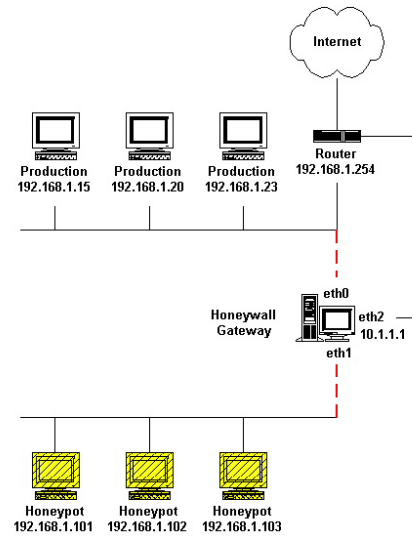

Creating a network architecture with multiple systems become a honeynet.

- Lessons Learned from <http://old.honeynet.org/papers/edu/>
- Out of all of this were a variety of lessons learned things to do and NOT to do. Hopefully this short list can help you avoid some common mistakes.



- Start Small - If you are going to install a honeynet within your enterprise, start small. Begin initially with two machines (in order to detect sweep scans of your honeynet) with operating systems that you are familiar with installed behind the reverse firewall.
- Maintain good relations with your enterprise administrators. THIS IS CRITICAL! Inform your network administrators of the types of exploits that you are seeing. In some cases, they will already be aware of these exploits, but in other cases, you will have been the first person to notice them.
- Focus on attacks and exploits originating from within your enterprise network. These are the attacks that can do the most damage to your enterprise. Inform your enterprise administrators immediately of these types of attacks since they indicate machines that have already been compromised within the enterprise.
- Don't publish the IP address range of the honeynet. There is no need to do this. Hackers and worms are constantly scanning across the Internet for machines to exploit. Your honeynet will be found and attacked.
- Don't underestimate the amount of time required to analyze the data collected from the honeynet. This data must be analyzed every day. You will be collecting lots of information and it must be analyzed to provide any benefit.
- Powerful machines are not necessary to establish the honeynet. The Georgia Tech Honeynet did not use state of the art machines and it functioned as intended. Everything we needed to establish our honeynet was already available on campus.

Source: *Know Your Enemy: Honeynets in Universities Deploying a Honeynet at an Academic Institution*

Honeypot vs NIDS



NIDS

- + See all traffic
- — see and need to process ALL TRAFFIC
- + Known and understood by management

Honeypot

- + See only attack traffic
- + Few false positives
- + Require less ressources

Counter Attacks



- General rule, never *hack back*
- Usually not the real source of the attacks
- End up attacking random innocent victims
- Unintended consequences – hacking back medical equipment? SCADA or ICS?
- Ethically not sound

Coordinating Response



- **Definition 27-8** A *computer security incident response team* (CSIRT) is a team established to assist and coordinate responses to a security incident among a defined constituency
- Constituency may be a company, an organization, a sector (academic institutions), or even broader
- Morris internet worm lead to the formation of the Computer Emergency Response Team (CERT/CC) coordination center at Carnegie Mellon University
https://en.wikipedia.org/wiki/CERT_Coordination_Center
- The main danish CERT/CSIRT is <https://www.cert.dk/en> unfortunately it only covers forskningsnettet the National Research and Educational Networks (NREN) in Denmark!
- In Denmark we also had GovCERT, which is now part of Center for Cyber Security (CfCS)
- There is an internet standard document about Incident Response
Expectations for Computer Security Incident Response <https://www.ietf.org/rfc/rfc2350.txt>

Digital Forensics – Computer Forensics



- **Definition 27-9** *Digital forensics* is the science of identifying and analyzing entities, states, and state transitions of events that have occurred or are occurring.
- 1. Consider the entire system – access to at least the information that the intruder had before and during attack
- 2. Assumptions should not control what is logged
- 3. Consider the effects of actions as well as the actions
- 4. Context assists in understanding meaning
- 5. Information must be processed and presented in an understandable way

Definition



Computer Forensics involves the preservation, identification, extraction, documentation and interpretation of computer data.

Computer Forensics: Incident Response Essentials, Warren G. Kruse II og Jay G. Heiser, Addison-Wesley, 2002

TASK og Autopsy



Inspired by The Coroners Toolkit (TCT) by Dan Farmer and Wietse Venema

Created by Brian Carrier

Official home TASK and autopsy www.sleuthkit.org

TASK are the command line tools, replace TCT


Autopsy is a Forensic Browser – interface to TASK

Method in Practice



- 1. Capture and preserve the current state of the system and network data
 - 2. Extract information about that state and about prior states
 - 3. Analyze the data gathered to determine the sequence of actions, which objects they affected, and how
 - 4. Prepare and report the results of the analysis to the intended audience
-
- Example steps:
 - Create list of all files
 - Create timeline of all changes
 - Find all deleted files
 - Check free space, previously deleted files, use file-carving tools
 - Check other sources, system logs, intrusion detection systems etc.

Exercise

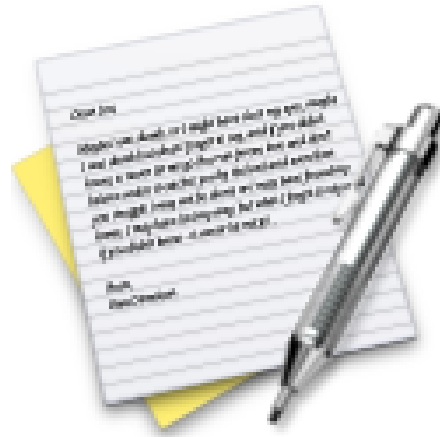

Now lets do the exercise

Clean or rebuild a server

which is number **24** in the exercise PDF.



Chaosreader Report

Created at: Sun Nov 16 21:04:18 2003, Type: snoop

[Image Report](#) - Click here for a report on captured images.

[GET/POST Report](#) (Empty) - Click here for a report on HTTP GETs and POSTs.

[HTTP Proxy Log](#) - Click here for a generated proxy style HTTP log.

TCP/UDP/... Sessions

1.	Sun Nov 16 20:38:22 2003	30 s	192.168.1.3:1368 <-> 192.77.84.99:80	web	383 bytes	• as_html
2.	Sun Nov 16 20:38:22 2003	29 s	192.168.1.3:1366 <-> 192.77.84.99:80	web	381 bytes	• as_html

Older tool chaosreader, can open network dump and provide HTML output

HTML show sessions, pictures etc.

`http://chaosreader.sourceforge.net/`

Example output `http://chaosreader.sourceforge.net/Chaos01/index.html`

Myth: laptop passwords protect data



Myth:

Some still believe passwords on laptops protect data

Truth:

They are only a minor nuisance

The login prompt does not protect the data

It is possible to boot from another disk, or remove disk

Are your data secure - data at rest



Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum. Tia non ob ea solutad inco. Quae egen ium imp. and. Officia deserunt mollit a. orum Et harumd dereud fac. er expedit distinct. Gothica quam nunc putamus parum. aposuerit litterarum formas humanitatis per seacula quarta; modo typi is videntur per. clari fiant sollemnes in futurum; litterarum f. humanitatis per sea. cima et quinta decima, modo typi qui nu. ratur parur. llemnes in futuro rit ! Nam liber te conscient to factor tum p. ioque civi. aque pecun moc. onor et imper r. et, conse. ing elit, se. et dolore magna aliqua is nostrud exercitatio. lo conse. e in voluptate velit esse cillum dolore eu fugiat nulla pariatur. At vver e. am dignissum qui blandit est praesent.

Stolen laptop, tablet, phone - can anybody read your data?

Do you trust "remote wipe"

How do you in fact wipe data securely off devices, and SSDs?

Encrypt disk and storage devices before using them in the first place!

Single user mode boot



Unix systems often allow single user mode boot

Previously holding command-s on Mac OS X gave single user boot

Laptops can often be booted using PXE network or CD boot

Macbooks boot from CDRom press c

Macbooks can also be turned into *firewire* hard discs


Press t during boot, firewire target mode - same with Thunderbolt now

Unrestricted access to un-encrypted data

Moving hard drive to another computer is also easy

Physical access to a system – **game over**

Full Disk Encryption (FDE)

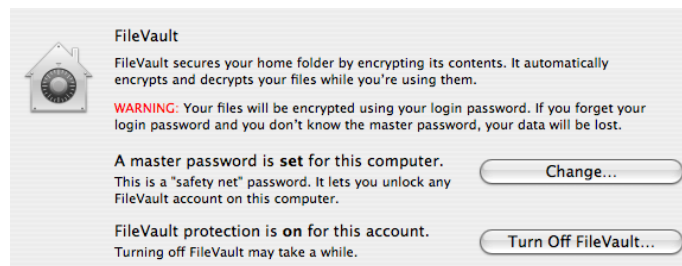

Full Disk Encryption protect data from physical access

Available in the most popular client operating systems

- Microsoft Windows Bitlocker
- Apple Mac OS X - FileVault
- FreeBSD GEOM og GBDE - encryption framework
- Linux LUKS distributions like Ubuntu ask to encrypt home dir during installation
- Some vendors have BIOS passwords, or disk passwords

Attacks on disk encryption



- Firewire, DMA & Windows, Winlockpwn via FireWire
Hit by a Bus: Physical Access Attacks with Firewire Ruxcon 2006
- Removing memory from live system - data is not immediately lost, and can be read under some circumstances
Lest We Remember: Cold Boot Attacks on Encryption Keys
<http://citp.princeton.edu/memory/>
- This is very CSI or Hollywood like - but a real threat
- VileFault decrypts encrypted Mac OS X disk image files
<https://code.google.com/p/vilefault/>
- FileVault Drive Encryption (FVDE) (or FileVault2) encrypted volumes
<https://code.google.com/p/libfvde/>

So perhaps use both hard drive encryption AND turn off computer after use?

... and deleting data



Getting rid of data from old devices is a pain

Some tools will not overwrite data, leaving it vulnerable to recovery

Even secure erase programs might not work on SSD

- due to reallocation of blocks

I have used Darik's Boot and Nuke ("DBAN")

<http://www.dban.org/>

```
Darik's Boot and Nuke beta.2003052000
Options
Entropy: Linux Kernel (urandom)
PRNG: Mersenne Twister (mt19937ar-cok)
Method: DoD 5220-22-M
Verify: Last Pass
Rounds: 1
Statistics
Runtime: 00:00:21
CPU Load: 96%
Throughput: 5973 KB/s
Limiter: Disk I/O
Errors: 0

(IDE 0,0,0,-,-) VMware Virtual IDE Hard Drive
[04.33%, round 1 of 1, pass 1 of 7] [writing] [5973 KB/s]
```


2018 attack



Drive	1	2	3	4	5	6	7	8	9	Impact
Crucial MX100 (all form factors)	✗	✗	✗							✗ Compromised
Crucial MX200 (all form factors)	✗	✗	✗							✗ Compromised
Crucial MX300 (all form factors)	✓	✓	✓		✗	✓	✓	✓	✓	✗ Compromised
Samsung 840 EVO (SATA)	✗	✓	✓		✓	✓	✓	✗	✓	~ Depends
Samsung 850 EVO (SATA)	✗	✓	✓		✓	✓	✓	✓	✓	~ Depends
Samsung T3 (USB)				✗						✗ Compromised
Samsung T5 (USB)				✗						✗ Compromised

- ¹ Cryptographic binding in ATA Security (High mode)
- ² Cryptographic binding in ATA Security (Max mode)
- ³ Cryptographic binding in TCG Opal
- ⁴ Cryptographic binding in proprietary standard
- ⁵ No single key for entire disk
- ⁶ Randomized DEK on sanitize
- ⁷ Sufficient random entropy
- ⁸ No wear leveling related issues
- ⁹ No DEVSLP related issues

self-encrypting deception: weakness in the encryption of solid state drives (SSDs)

<https://www.ru.nl/publish/pages/909282/draft-paper.pdf>

Example incident response procedures



<https://cloud.google.com/security/incident-response/>

Exercise




Now lets do the exercise

Cloud environments influence on incident response

which is number **25** in the exercise PDF.

For Next Time



Think about the subjects from this time, write down questions

Check the plan for chapters to read in the books

Most days have less than 100 pages, but some days may have more!

Visit web sites and download papers if needed

Retry the exercises to get more confident using the tools