

Q1 Write

Enter no.
↓
Read no.
↓
 $i = 0$
↓
Is $i \leq 10$?
↓
Yes → NO
↓
Print i
↓
 $i = i + 1$
↓
Go back to
 $i \leq 10$.

Q2

Pseudocode.

Σ
for ($i = 0$ to 10)
{
 Print (i)
}

Q2 Enter a no

↓
Read no.
↓
 $i = 0$
↓
Is $i < 50$?
↓
Yes → NO
↓
Print i
↓
 $i = i + 1$
↓
Go back to
 $i < 50$

Q-2

for ($i = 0$ to 50)

Σ
Print (i)
}

Q3 Enter a no.

↓
Read no.
↓
 $i = 1$
↓
Is $i > 15$?
↓
Yes → NO
↓
Calculate no $\times i$
↓
Display result.

Q3 Print "Enter a no."

Read no.

$i = 1$

until ($i > 15$)

Σ



result = no $\times i$

Print "no = x", i , result

$i = i + 1$

}

$i = i + 1$
 $\downarrow$
 go back to $i > 10$

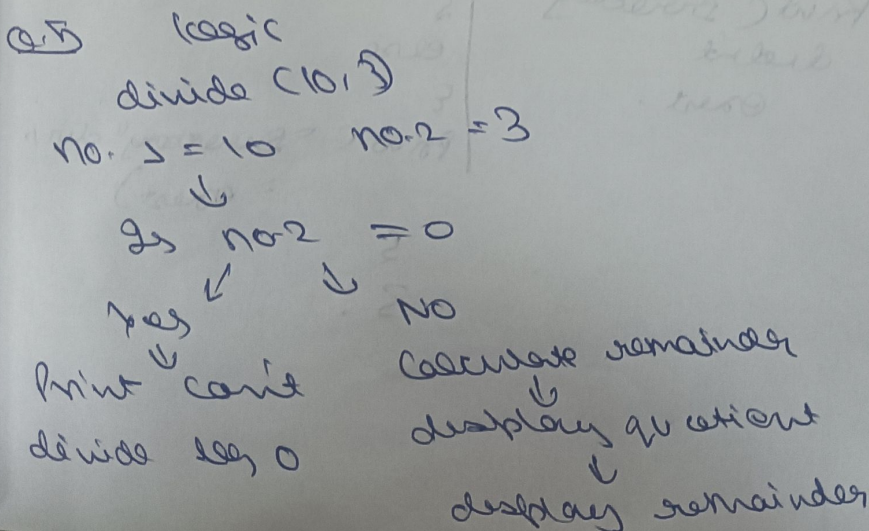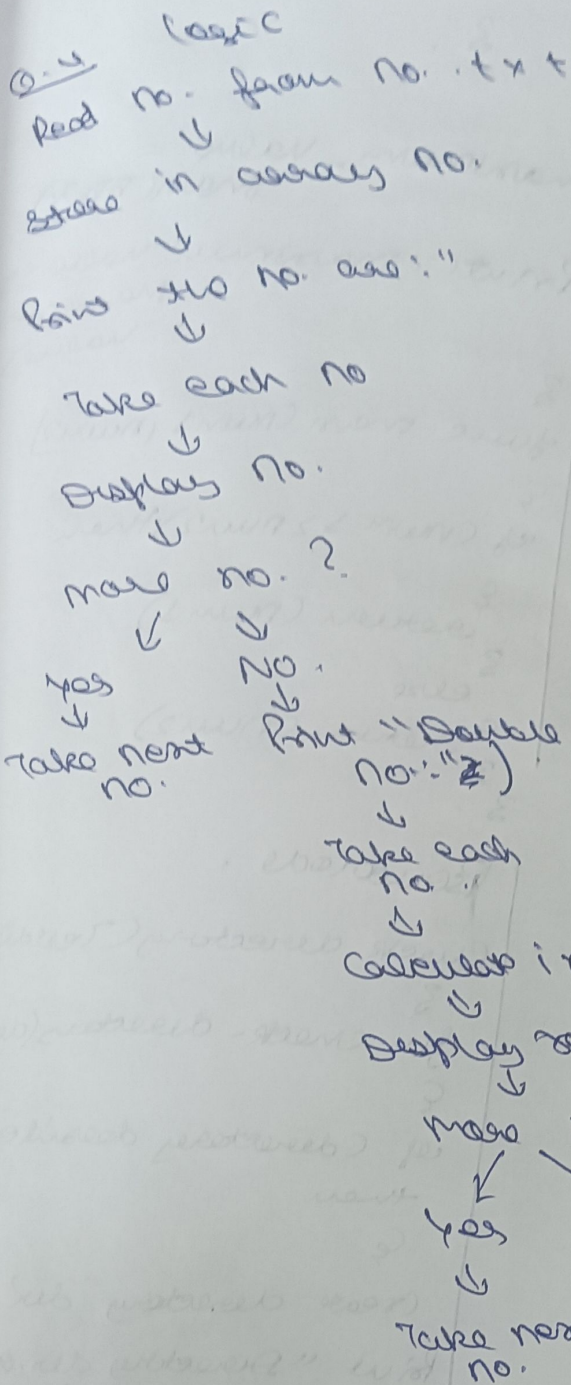

Pseudocode.

```

    Read no from "no"
    Print "no no no"
    for each i in no.
    {
        Print (i)
    }
    Print (Double no. : )
    for each i in no.
    {
        double =  $i \times 2$ 
        Print (double)
    }
  
```

Pseudocode.

```

    divide (no1, no2)
    {
        if no2 no2 = 0 then
        {
            Print ("can't divide by zero")
        }
        else
        {
            quotient =  $no1 / no2$ 
            remainder =  $no1 \text{ mod } no2$ 
        }
    }
  
```

Print (Quotient is:
quotient)

Print (Remainder is:
remainder)

}

}

Q-6 max (5, 30)

↓
 $no \geq 5$, $no.2 = 30$

↓
is $no.1 > no.2$?

Yes

NO

↓
 $max = no.1$

↓
 $max = no.2$

↓
Display max
val

Q-7. logic

Check directory
(Test dir)

↓
Store directory.

↓
does dir exist ?

Yes

No

↓
Print (Directory
exists)

↓ create
directory

↓
Print (Directory
didn't
exist.)

maximum_value =
max(5, 30)

Print ("maximum value is
maximum
value")

}

}
func main (num1, num2)

{

if (num1 > num2) then

{
return (num1)

}

else
{
return (num2)

}

}

Pseudocode :

Check directory (Test dir)

}

}
if (check-directory (dir))

{

if (directory doesn't exist)

then

{

create directory "dir"

Print ("Directory dir, does
not exist")

}

else

{


Print ("Directory" dir,
= exist)

}

}

Problem.

Pseudocode & Logic

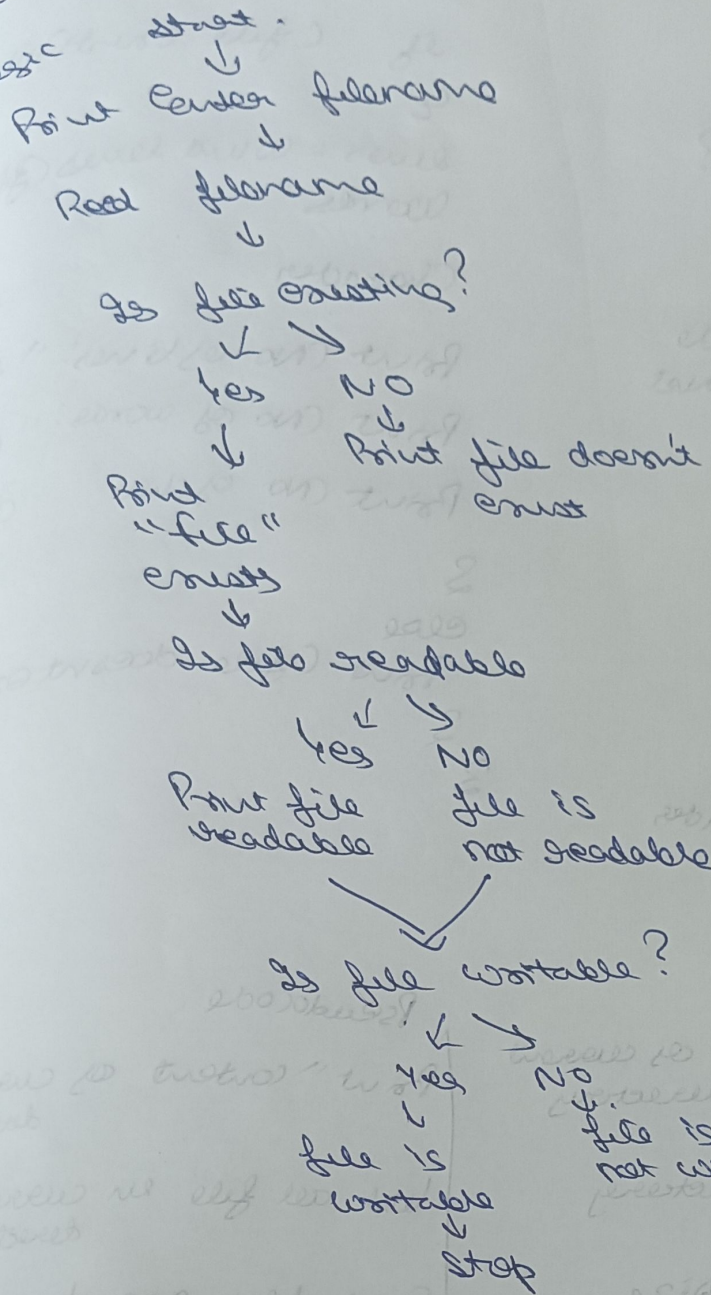

Pseudocode.

Enter "filename")

Read filename

if (filename exists) then

Print "file exists"

if (filename is readable

then

Print (file is readable)

else

Print (file is not readable)

if (filename is writable)

then

Print (file is writable)

else

Print "file is not writable"

endif

endif

else

Print (file doesn't exist)

endif

2- Enter filename

↓
Read filename

↓
Is file existing?

✓ ✗

Yes

No

Print file
exist

Print file
not exist

↓
count no.
of lines, words

& characters

↓
Print no. of lines

↓
Print no. of words

Print no. of characters

Print "Enter filename

Read filename

if (file exists) then

{

lines = count lines (filename)

words

Character

Print (No. of lines: " lines)

Print (No. of words: " words)

Print (No. of char: " characters)

}

else

Print (file doesn't exist)

}

}

3- Logic

Display "contents" of current
directory

List file in directory

↓

Sort file by size

↓

Select largest file

Display largest file

↓

Display largest file

Pseudocode

Print "content of current
directory

List all file in current
directory

Sort files acc. to size

(largest) - Select largest
file

Print ("largest file: ")

Print (largest)

End.

① logic
Enter word
↓
Read word
↓
Enter filename
↓
Read filename
↓
Search word in
file
↓
Display matching
lines.

②
Prompt (Enter word)
Read word
Print (Enter filename: "
Read (filename)
Search word in filename
(Display matching lines

3.