

BEE 4750 Lab 1: Julia and GitHub Basics

Name: Sadiqah Quadery **ID:** sq227

Due Date

Thursday, 8/28/25, 9:00pm

Setup

The following code should go at the top of most Julia scripts; it will load the local package environment and install any needed packages. You will see this often and shouldn't need to touch it.

```
import Pkg
Pkg.activate(".")
Pkg.instantiate()
```

```
Activating project at `~/BEE4750/lab1-squadery-1`
Installing known registries into `~/.julia`
  Added `General` registry to `~/.julia/registries`
Installed Preferences          v1.4.3
Installed Libmount_jll        v2.41.0+0
Installed LERC_jll             v4.0.1+0
Installed JpegTurbo_jll        v3.1.1+0
Installed LoggingExtras        v1.1.0
Installed Opus_jll             v1.5.2+0
Installed Xorg_xkbcomp_jll     v1.4.7+0
Installed RelocatableFolders   v1.0.1
Installed Unitful              v1.24.0
Installed x265_jll             v4.1.0+0
Installed libfdk_aac_jll       v2.0.4+0
Installed Contour              v0.6.3
```

Installed libdecor_jll	v0.2.2+0
Installed ConcurrentUtilities	v2.5.0
Installed Measures	v0.3.2
Installed ColorSchemes	v3.30.0
Installed GR_jll	v0.73.17+0
Installed Grisu	v1.0.2
Installed Xorg_xcb_util_wm_jll	v0.4.2+0
Installed Xorg_xcb_util_image_jll	v0.4.1+0
Installed RecipesPipeline	v0.6.12
Installed OpenSSL	v1.5.0
Installed DelimitedFiles	v1.9.1
Installed Xorg_libSM_jll	v1.2.6+0
Installed HTTP	v1.10.17
Installed libsodium_jll	v1.0.21+0
Installed Cairo_jll	v1.18.5+0
Installed PlotUtils	v1.4.3
Installed Xorg_xcb_util_jll	v0.4.1+0
Installed Fontconfig_jll	v2.16.0+0
Installed Statistics	v1.11.1
Installed Xorg_libxkbfile_jll	v1.1.3+0
Installed Xorg_libXinerama_jll	v1.1.6+0
Installed EpollShim_jll	v0.0.20230411+1
Installed Missings	v1.2.0
Installed GR	v0.73.17
Installed Xorg_libXau_jll	v1.0.13+0
Installed FFMPEG	v0.4.4
Installed Showoff	v1.0.3
Installed IrrationalConstants	v0.2.4
Installed JSON	v0.21.4
Installed Pango_jll	v1.56.3+0
Installed xkbcommon_jll	v1.9.2+0
Installed PtrArrays	v1.3.0
Installed Bzip2_jll	v1.0.9+0
Installed SimpleBufferStream	v1.2.0
Installed XZ_jll	v5.8.1+0
Installed HarfBuzz_jll	v8.5.1+0
Installed Xorg_xcb_util_keysyms_jll	v0.4.1+0
Installed NaNMath	v1.1.3
Installed TranscodingStreams	v0.11.3
Installed SoftGlobalScope	v1.1.0
Installed fzf_jll	v0.61.1+0
Installed PlotThemes	v3.3.0
Installed FriBidi_jll	v1.0.17+0

Installed LZ0_jll	v2.10.3+0
Installed UnicodeFun	v0.4.1
Installed ZeroMQ_jll	v4.3.6+0
Installed GLFW_jll	v3.4.0+2
Installed MbedTLS	v1.1.9
Installed FreeType2_jll	v2.13.4+0
Installed x264_jll	v10164.0.1+0
Installed Colors	v0.13.1
Installed DataStructures	v0.18.22
Installed IJulia	v1.29.2
Installed JLFzf	v0.1.11
Installed StatsAPI	v1.7.1
Installed Compat	v4.18.0
Installed CodecZlib	v0.7.8
Installed Xorg_libxcb_jll	v1.17.1+0
Installed libaom_jll	v3.12.1+0
Installed libpng_jll	v1.6.50+0
Installed StatsBase	v0.34.5
Installed Scratch	v1.3.0
Installed ExceptionUnwrapping	v0.1.11
Installed ColorTypes	v0.12.1
Installed mtdev_jll	v1.1.7+0
Installed Dbus_jll	v1.16.2+0
Installed Xorg_libXext_jll	v1.3.7+0
Installed Zstd_jll	v1.5.7+1
Installed eudev_jll	v3.2.14+0
Installed Plots	v1.40.17
Installed TensorCore	v0.1.1
Installed Conda	v1.10.2
Installed Xorg_xcb_util_cursor_jll	v0.1.5+0
Installed ZMQ	v1.4.1
Installed Libtiff_jll	v4.7.1+0
Installed Format	v1.3.7
Installed ColorVectorSpace	v0.11.0
Installed JLLWrappers	v1.7.1
Installed OrderedCollections	v1.8.1
Installed Libffi_jll	v3.4.7+0
Installed Xorg_libXrender_jll	v0.9.12+0
Installed libevdev_jll	v1.13.4+0
Installed libinput_jll	v1.28.1+0
Installed Ogg_jll	v1.3.6+0
Installed Xorg_libXi_jll	v1.8.3+0
Installed Qt6ShaderTools_jll	v6.8.2+1

Installed Parsers	v2.8.3
Installed Vulkan_Loader_jll	v1.3.243+0
Installed Qt6Declarative_jll	v6.8.2+1
Installed Reexport	v1.2.2
Installed MacroTools	v0.5.16
Installed Xorg_libXcursor_jll	v1.2.4+0
Installed Expat_jll	v2.6.5+0
Installed LogExpFunctions	v0.3.29
Installed Libuuid_jll	v2.41.0+0
Installed Xorg_xcb_util_renderutil_jll	v0.3.10+0
Installed AliasTables	v1.1.3
Installed Xorg_libICE_jll	v1.1.2+0
Installed StableRNGs	v1.0.3
Installed Graphite2_jll	v1.3.15+0
Installed Pixman_jll	v0.44.2+0
Installed Wayland_jll	v1.24.0+0
Installed Xorg_xtrans_jll	v1.6.0+0
Installed DocStringExtensions	v0.9.5
Installed Latexify	v0.16.8
Installed libass_jll	v0.17.4+0
Installed OpenSSL_jll	v3.5.1+0
Installed BitFlags	v0.1.9
Installed Xorg_xkeyboard_config_jll	v2.44.0+0
Installed FFMPEG_jll	v7.1.1+0
Installed DataAPI	v1.16.0
Installed LLVMOpenMP_jll	v18.1.8+0
Installed Xorg_libXfixes_jll	v6.0.1+0
Installed LAME_jll	v3.100.3+0
Installed Qt6Wayland_jll	v6.8.2+1
Installed Xorg_libXrandr_jll	v1.5.5+0
Installed FixedPointNumbers	v0.8.5
Installed PrecompileTools	v1.2.1
Installed Libiconv_jll	v1.18.0+0
Installed GettextRuntime_jll	v0.22.4+0
Installed RecipesBase	v1.3.4
Installed URIs	v1.6.1
Installed VersionParsing	v1.3.0
Installed Qt6Base_jll	v6.8.2+1
Installed LaTeXStrings	v1.4.0
Installed Glib_jll	v2.84.3+0
Installed Libglvnd_jll	v1.7.1+1
Installed Xorg_libXdmcp_jll	v1.1.6+0
Installed Xorg_libX11_jll	v1.8.12+0

```

Installed libvorbis_jll          v1.3.8+0
Installed Unzip                  v0.2.0
Installed Requires               v1.3.1
Installed SortingAlgorithms     v1.2.1
Installed UnitfulLatexify       v1.7.0
Building Conda → `~/.julia/scratchspaces/44cfe95a-1eb2-52ea-b672-e2afdf69b78f/b19db3927f
Building IJulia → `~/.julia/scratchspaces/44cfe95a-1eb2-52ea-b672-e2afdf69b78f/016d15e5d
Precompiling project...
  906.8 ms   LaTeXStrings
 1155.6 ms   TensorCore
 1433.3 ms   StatsAPI
 1738.0 ms   Contour
 2249.4 ms   VersionParsing
 2669.4 ms   Measures
 3149.4 ms   Format
 3162.9 ms   Statistics
 3778.0 ms   Grisu
 4041.1 ms   Requires
 4451.0 ms   OrderedCollections
 4633.6 ms   StableRNGs
 4367.2 ms   Unzip
 4074.2 ms   Reexport
 5667.9 ms   MacroTools
 4358.6 ms   DocStringExtensions
 3875.0 ms   SimpleBufferStream
 4308.2 ms   URIs
 4983.7 ms   IrrationalConstants
 3697.9 ms   PtrArrays
 4190.2 ms   TranscodingStreams
 3785.1 ms   NaNMath
 3821.6 ms   DelimitedFiles
 3635.7 ms   DataAPI
 3755.8 ms   BitFlags
 3954.4 ms   ConcurrentUtilities
 3931.9 ms   Scratch
 4526.3 ms   MbedTLS
 3627.8 ms   LoggingExtras
 4142.3 ms   Preferences
 4158.6 ms   Compat
 4577.7 ms   SoftGlobalScope
 4273.2 ms   ExceptionUnwrapping
 5266.4 ms   UnicodeFun
 4271.2 ms   Showoff

```

6692.8 ms	Statistics → SparseArraysExt
7072.7 ms	AliasTables
9213.9 ms	FixedPointNumbers
7024.5 ms	CodecZlib
6789.0 ms	Missings
6888.6 ms	RelocatableFolders
6331.9 ms	PrecompileTools
6789.3 ms	JLLWrappers
6236.5 ms	Compat → CompatLinearAlgebraExt
9736.2 ms	LogExpFunctions
7190.7 ms	ColorTypes
5190.1 ms	Xorg_libICE_jll
6431.5 ms	Libmount_jll
6439.3 ms	EpollShim_jll
6577.0 ms	Graphite2_jll
5936.3 ms	libsodium_jll
6584.5 ms	Bzip2_jll
6599.2 ms	LLVMOpenMP_jll
6658.7 ms	OpenSSL_jll
7065.8 ms	RecipesBase
1408.2 ms	Xorg_libXau_jll
1537.1 ms	libpng_jll
1916.8 ms	LAME_jll
2279.0 ms	libfdk_aac_jll
2593.6 ms	LERC_jll
18409.3 ms	Latexify
2949.6 ms	fzf_jll
3557.2 ms	JpegTurbo_jll
4039.2 ms	XZ_jll
4343.7 ms	Ogg_jll
4303.2 ms	mtdev_jll
4299.7 ms	Xorg_libXdmcp_jll
4426.0 ms	x265_jll
4555.0 ms	x264_jll
4601.6 ms	Zstd_jll
25872.6 ms	Unitful
4504.0 ms	libaom_jll
4708.3 ms	Expat_jll
4779.8 ms	LZO_jll
4503.7 ms	Opus_jll
4266.1 ms	Xorg_xtrans_jll
4250.5 ms	libevdev_jll
4347.7 ms	Libiconv_jll

4301.4 ms	Libffi_jll
4008.4 ms	eudev_jll
3852.9 ms	Libuuid_jll
4011.1 ms	FriBidi_jll
18684.3 ms	Parsers
4422.7 ms	Xorg_libSM_jll
7530.7 ms	ColorTypes → StyledStringsExt
8828.4 ms	DataStructures
3788.2 ms	Xorg_libxcb_jll
7684.3 ms	Latexify → SparseArraysExt
7914.3 ms	JLFzf
10889.6 ms	ZeroMQ_jll
11825.1 ms	Colors
4324.8 ms	DBus_jll
13059.1 ms	ColorVectorSpace
11650.9 ms	FreeType2_jll
11815.8 ms	Pixman_jll
4224.1 ms	Wayland_jll
11101.7 ms	libvorbis_jll
4203.9 ms	libinput_jll
7687.9 ms	Unitful → PrintfExt
3986.9 ms	Xorg_xcb_util_jll
4052.0 ms	Xorg_libX11_jll
6868.3 ms	SortingAlgorithms
7508.5 ms	JSON
3678.0 ms	Xorg_xcb_util_image_jll
4009.6 ms	Xorg_xcb_util_keysyms_jll
4327.1 ms	Xorg_xcb_util_renderutil_jll
4330.9 ms	Xorg_xcb_util_wm_jll
20782.9 ms	OpenSSL
14475.5 ms	GettextRuntime_jll
7733.6 ms	UnitfulLatexify
4345.9 ms	Xorg_libXrender_jll
4730.3 ms	Xorg_libXext_jll
4197.1 ms	Xorg_libXfixes_jll
4173.7 ms	Xorg_libxkbfile_jll
13383.3 ms	ZMQ
3785.9 ms	Xorg_xcb_util_cursor_jll
3790.8 ms	Xorg_libXinerama_jll
4117.2 ms	Xorg_libXrandr_jll
4112.7 ms	Libglvnd_jll
4129.9 ms	Xorg_libXcursor_jll
15476.9 ms	ColorSchemes

```

3685.8 ms Xorg_libXi_jll
3943.3 ms Xorg_xkbcomp_jll
10733.4 ms Conda
19611.2 ms Fontconfig_jll
4882.7 ms Xorg_xkeyboard_config_jll
32025.3 ms Libtiff_jll
2798.7 ms xkbcommon_jll
16198.0 ms Glib_jll
1746.4 ms Vulkan_Loader_jll
19608.8 ms StatsBase
10603.5 ms IJulia
16562.8 ms PlotUtils
4681.8 ms PlotThemes
12403.3 ms Cairo_jll
12848.7 ms Qt6Base_jll
7467.3 ms RecipesPipeline
5646.8 ms HarfBuzz_jll
34867.0 ms HTTP
4876.2 ms libass_jll
4927.2 ms Pango_jll
9826.6 ms Qt6ShaderTools_jll
1451.7 ms libdecor_jll
1208.8 ms GLFW_jll
3948.7 ms Qt6Declarative_jll
1055.5 ms Qt6Wayland_jll
8282.2 ms FFMPEG_jll
4104.1 ms FFMPEG
5473.7 ms GR_jll
4183.6 ms GR
65399.0 ms Plots
5687.1 ms Plots → UnitfulExt
6527.8 ms Plots → IJuliaExt
153 dependencies successfully precompiled in 185 seconds. 35 already precompiled.

```

This next cell loads packages which are required for the rest of the code evaluation. In this case, we only need to load the `Plots.jl` plotting package, but you will see others over the course of the semester (and can add more if desired; just make sure that you’ve [added the new packages to the environment](#)). Standard Julia practice is to load all of the needed packages at the top of the file.

Warning

Loading packages can take a while, especially the first time! Julia tries to precom-

pile all of the packages you're using so repeat use is faster, but this can be quite slow at first.

using Plots

Introduction

Julia

Julia is an up-and-coming language, originally developed for scientific programming. While learning a new programming language always has its hiccups, the good news is that if you've programmed in a high-level language such as Python or MATLAB, most Julia concepts should look familiar.

If you have not successfully set up Julia, follow the instructions in [Tools Setup](#) and/or ask for help.

You can use other editors for this course, but our recommendation is [Visual Studio Code](#) with the [Julia extension](#), which will make life a *lot* simpler! You should have set this up by following the [Tools Setup](#) instructions, but if not, do so now and/or ask for help.

Jupyter Notebooks

Jupyter notebooks integrate text and equations in Markdown with Julia (or Python, or R) code. To do this, Jupyter notebooks consist of two types of “cells”: code cells and Markdown (text) cells.

Click once on this section of text. A box will appear around this text (and some areas above/below it) - all of that is within this cell.

Markdown is a text markup framework for formatting language that makes things look pretty when viewed across different platforms: web browsers, notebooks, and so forth. Text written in Markdown can also include hyperlinks, LaTeX equations, section headers, and images, among other features (most of [the course website](#) and the lecture notes were all written in Markdown!). [Here is a basic Markdown cheat sheet](#).

What you are looking at right now is the formatted text after the Markdown is processed. To see the raw Markdown, do one of:

- press **Enter** while that cell is selected, or
- double-click on that cell.

A couple of the features you will see in this Markdown cell:

- The `---` command creates a horizontal line. This is also nice for separating sections.
- Backticks (``...``) can be used to format and highlight code, keystrokes, etc.
- The `#` sign is used to create a new section header; two `#` signs (`##`) is used to create a new subsection header; `###` creates a subsubsection, and so on.
- You can create a bulleted list by using the asterisk `*` or a dash `-` and a space.
- You can create regular text by just typing as usual.
- You can create **bold-faced text** by wrapping it with two asterisks on both sides.
- You can create *italicized text* by wrapping it with a single asterisk on both sides.
- To create a new paragraph, you must include a blank line between the old and new paragraphs.

At this point you might be wondering how to turn this cell back into the fully formatted Markdown text instead of the raw Markdown you're probably still looking at. You have a couple of options, depending on your platform, but the most consistent is to type **Shift + Enter** to **execute** the cell (this is also how to run code, but more on that later).

Additionally, you will frequently need to create new cells in your Jupyter notebooks. How you do this will depend on how you interact with the notebook, but try to figure this out now.

One tip is to think carefully about what bits of code should be in the same cell, as you typically only see output from the last command in a cell. For example, compare the following:

```
x = 5
sin(x)
```

-0.9589242746631385

with

```
x = 5
```

5

```
sin(x)
```

-0.9589242746631385

In Julia, you can also suppress the output of a command with a semi-colon:

```
sin(x);
```

which can help if you want to split some code out for clarity or to insert some text prior to it, but don't want to clutter the notebook with its output.

For code cells, to execute the commands within the cell, we also press **Shift+Enter**.

Finally, **make sure that you evaluate all of the code cells in order before submitting**. One bad outcome with notebooks occurs when cells are evaluated out of order, so fixed bugs and edits in previous cells do not get a chance to propagate down. You can do this with the **Run All** command in whichever interface you're using to edit your notebook.

Julia Basics

There are many tutorials and references for Julia, including a [basics overview on the class website](#). Please feel free to reference these as you work through any part of the course.

Formatting Math

It will often be helpful to include nicely-formatted mathematics in a notebook. Markdown accomodates this using LaTeX syntax. A LaTeX cheatsheet is available on the class website, and many other guides exist online.

Below is an example of a formatted equation:

$$x = 5.$$

Looking For Help

There is no shame in using Google, or other resources, for help when programming. There are many, many times when you can't quite get the syntax to work, can't quite figure out the right package or command to use, or are feeling too lazy or overwhelmed (I'm not judging either of those!) to dig through the documentation. Some good resources include:

- [Stack Overflow](#) is a treasure trove of answers;
- The [official Julia forum](#) and the [Julia Subreddit](#) are also very useful.

You are also highly encouraged to post on [Ed Discussion](#), though getting a response might be less immediate. Just be mindful that to get good answers, [you have to help people help you](#), and **make sure to give credit to any resources that were helpful!**

Exercises (3 points)

Use your understanding of Julia syntax and the GitHub workflow to complete the following (hopefully short) exercises. Convert your completed lab assignment to a PDF and submit it to the Gradescope Assignment “Lab 1”.

Remember to:

- Include a (succinct but clear) writeup of the core idea underlying your code, through some combination of equations, text, and algorithms. As you are not required to submit your code, we will not be looking at it in detail, and instead will rely on those writeups to assess whether your approach is correct.
- If using the notebook, evaluate all of your code cells, in order (using a **Run All** command). This will make sure all output is visible and that the code cells were evaluated in the correct order.
- Tag each of the problems when you submit to Gradescope; a 10% penalty will be deducted if this is not done.

Computing a Dot Product

Given two numeric arrays x and y , write a function to compute their dot product if they have equal length, and return an error if not (this is useful for debugging!). Use the following code as a starting point. **Do not use a built-in function.**

```
function dot_product(x, y)
    if length(x)==length(y)
        result=sum(x.*y)
    else
        throw(DimensionMismatch("length of x not equal to length of y"))
    end
end
```

`dot_product` (generic function with 1 method)

Here are some tests to make sure your code works as intended. Tests like these are useful to make sure everything works as intended. One reason to split your code up into functions is that it makes it straightforward to write tests to make sure each piece of your code works, which makes it easier to identify where errors are occurring.

```
dot_product([1 2 3], [4 5 6])
```

If you know the value you should get, you can write a more formal test using the `@assert` macro, which is a good way to “automate” checking (since you get an obvious error if the code doesn’t work as desired):

```
@assert dot_product([1 2 3], [4 5 6]) == 32
```

Let’s also make sure we get an error when the dimensions of the two vectors don’t match:

```
dot_product([1 2 3], [4 5])
```

```
DimensionMismatch: DimensionMismatch: length of x not equal to length of y  
DimensionMismatch: length of x not equal to length of y
```

Stacktrace:

```
[1] dot_product(x::Matrix{Int64}, y::Matrix{Int64})
```

```
@ Main ~/BEE4750/lab1-squadery-1/jl_notebook_cell_df34fa98e69747e1a8f8a730347b8e2f_X15sZm1
```

```
[2] top-level scope
```


```
@ ~/BEE4750/lab1-squadery-1/jl_notebook_cell_df34fa98e69747e1a8f8a730347b8e2f_X24sZmlsZQ==
```

Making a Plot

Write a function to compute the square of an integer x . Evaluate this function for integers between $x = -5$ and $x = 5$ and make a plot of the squared values (you can find a quick guide to making various types of plots [here](#)). Make sure to label your axes.

```
# insert your code here  
function square(x::Int)  
    return x*x  
end  
  
xs= -5:5  
ys= [square(x) for x in xs]  
  
plot(xs, ys, seriestype=:scatter, label="y = x^2")  
plot!(xs, ys, seriestype=:line, label="")
```

```
xlabel!("x")
ylabel!("y")
title!("Square of Integers from -5 to 5")
```

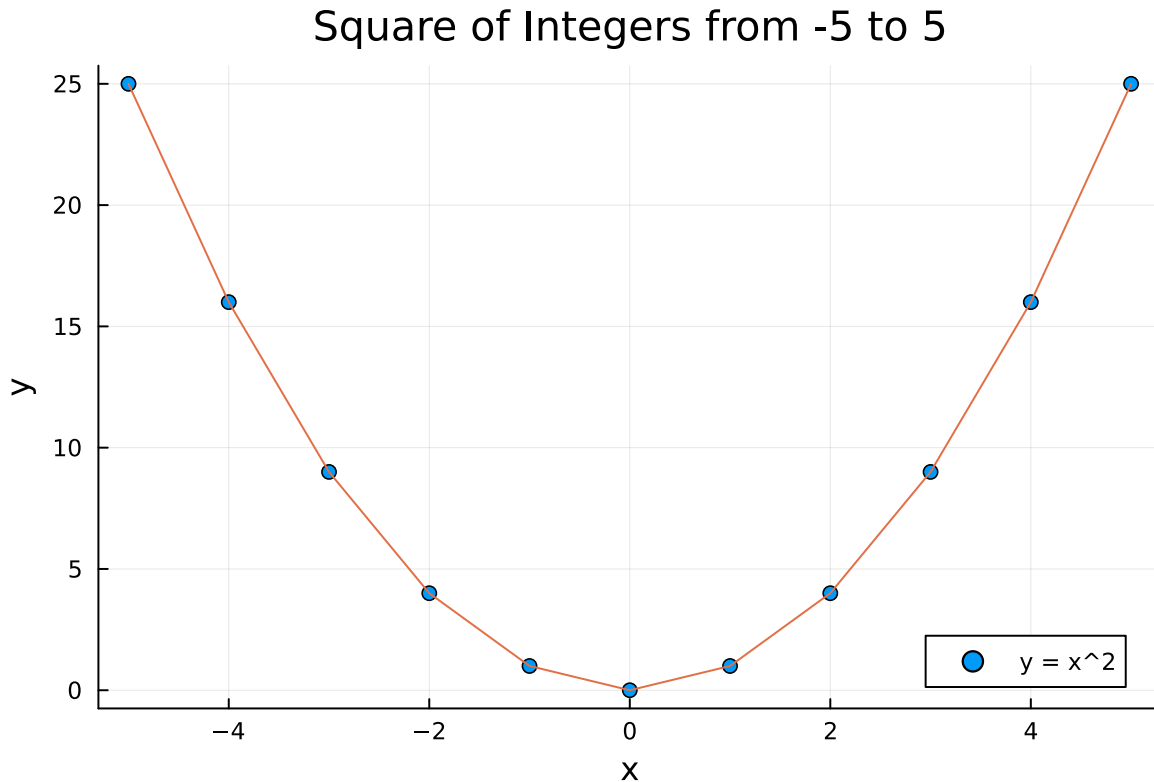

Commit and Push Your Changes to GitHub

After completing the previous two exercises, commit your solution file (notebook or otherwise) and push to GitHub. Use an informative commit message which makes it clear what changes you've made. The specific workflow for this will vary depending on how you're writing up your solutions; please search for specifics and ask for help as needed!

Useful Commit Sizes

Ideally, you'd commit whenever you make a "substantial" enough change that you want to lock in, such as writing the core code for a problem or completing a problem, if you're preparing code to be used elsewhere (by yourself or others), or if you want to ask for help. `git` lets you revert changes back to a previous commit, so it's easy

to undo changes or updates which broke something that was previously working, so changing too many things at once can make it hard to keep track of what worked when.

But in this case, go ahead and just commit after finishing the problems.

Push the repository with these commits to GitHub and take a screenshot of the repository page (<https://github.com/BEE4750-FA25/<username>/lab01>) which shows the updated repository. Include that screenshot in your submission as the solution to this problem.

Submitting PDF

Important

These submission instructions will not be repeated on future assignments!

Export your writeup as a PDF (this doesn't have to be a notebook if you're struggling to export: you can do your writeup in *e.g.* Microsoft Word) and submit it to the "Lab 1" assignment on Gradescope. **Make sure that you tag pages corresponding to relevant problems to avoid a 10% penalty.**

Printing Code to PDF

You are not required to submit your code when submitting assignments. However, when printing a notebook to PDF (whether you do this locally or via the GitHub Action), long lines will run off the edge of code cells, which may result in comments or code being hidden. If you see this, go back to the notebook and break up long lines into shorter ones (for example, see the comment in the above code cell) to ensure key parts of your results aren't missing.