

BEE 4750 Lab 1: Julia and GitHub Basics

Name: Xindi Liu

ID: xl748

Due Date

Thursday, 8/28/25, 9:00pm

Setup

The following code should go at the top of most Julia scripts; it will load the local package environment and install any needed packages. You will see this often and shouldn't need to touch it.

```
import Pkg
Pkg.activate(".")
Pkg.instantiate()
```

```
Activating project at `~/Desktop/Cornell_Courses/FA_25/BEE_4750/Lab01`
  Installed Fontconfig_jll    v2.16.0+0
  Installed libsodium_jll    v1.0.21+0
  Installed JpegTurbo_jll    v3.1.1+0
  Installed SoftGlobalScope  v1.1.0
  Installed IJulia           v1.29.2
  Installed Preferences      v1.4.3
  Installed Libmount_jll    v2.41.0+0
  Installed ZeroMQ_jll      v4.3.6+0
  Installed DataStructures  v0.18.22
  Installed ZMQ             v1.4.1
  Installed Libuuid_jll     v2.41.0+0
  Installed Conda           v1.10.2
  Installed StatsBase       v0.34.5
```

```

Installed Expat_jll          v2.6.5+0
Installed Plots              v1.40.17
Installed VersionParsing    v1.3.0
Installed Latexify          v0.16.8
Installed OpenSSL_jll      v3.5.1+0
Installed SortingAlgorithms v1.2.1
Building Conda → `~/ .julia/scratchspaces/44cfe95a-1eb2-52ea-b672-e2afdf69b78f/b19db3927f
Building IJulia → `~/ .julia/scratchspaces/44cfe95a-1eb2-52ea-b672-e2afdf69b78f/016d15e5d
Precompiling project...
 472.4 ms  VersionParsing
 476.5 ms  Preferences
 511.1 ms  SoftGlobalScope
 907.4 ms  ColorTypes
 465.8 ms  PrecompileTools
 564.5 ms  JLLWrappers
 459.5 ms  ColorTypes → StyledStringsExt
1258.0 ms  DataStructures
1893.7 ms  Latexify
1482.7 ms  ColorVectorSpace
 562.8 ms  OpenSSL_jll
1177.8 ms  RecipesBase
 408.7 ms  Graphite2_jll
 348.2 ms  Libmount_jll
 360.1 ms  EpollShim_jll
 403.4 ms  LLVMOpenMP_jll
 412.4 ms  Bzip2_jll
 387.5 ms  libsodium_jll
 387.3 ms  Xorg_libICE_jll
 376.0 ms  Xorg_libXau_jll
 422.7 ms  libpng_jll
 405.1 ms  libfdk_aac_jll
 405.9 ms  LAME_jll
2963.8 ms  Colors
 412.0 ms  LERC_jll
 393.9 ms  fzf_jll
 428.6 ms  JpegTurbo_jll
 440.0 ms  XZ_jll
 378.3 ms  Ogg_jll
 340.3 ms  mtdev_jll
 367.8 ms  Xorg_libXdmcp_jll
 431.4 ms  x265_jll
 392.3 ms  x264_jll
 419.1 ms  Zstd_jll

```

425.6 ms	libaom_jll
430.1 ms	Expat_jll
412.0 ms	LZO_jll
394.6 ms	Opus_jll
373.5 ms	Xorg_xtrans_jll
359.7 ms	libevdev_jll
410.5 ms	Libiconv_jll
402.4 ms	Libffi_jll
354.0 ms	eudev_jll
371.7 ms	Libuuid_jll
390.1 ms	FriBidi_jll
553.8 ms	SortingAlgorithms
749.4 ms	Latexify → SparseArraysExt
1033.5 ms	UnitfulLatexify
691.1 ms	Pixman_jll
578.3 ms	FreeType2_jll
429.6 ms	Xorg_libSM_jll
699.2 ms	ZeroMQ_jll
1856.1 ms	OpenSSL
733.8 ms	libvorbis_jll
396.7 ms	Xorg_libxcb_jll
923.8 ms	JLFFzf
361.2 ms	DBus_jll
376.5 ms	Wayland_jll
7621.2 ms	Parsers
751.1 ms	GettextRuntime_jll
351.7 ms	libinput_jll
1278.3 ms	Libtiff_jll
3197.4 ms	ColorSchemes
1454.4 ms	Fontconfig_jll
390.7 ms	Xorg_xcb_util_jll
1719.0 ms	StatsBase
412.2 ms	Xorg_libX11_jll
1822.8 ms	ZMQ
303.8 ms	Xorg_xcb_util_image_jll
370.9 ms	Xorg_xcb_util_keysyms_jll
1140.0 ms	JSON
1154.0 ms	Glib_jll
357.5 ms	Xorg_xcb_util_renderutil_jll
345.8 ms	Xorg_xcb_util_wm_jll
374.5 ms	Xorg_libXrender_jll
374.9 ms	Xorg_libXext_jll
362.3 ms	Xorg_libXfixes_jll

```

359.9 ms    Xorg_libxkbfile_jll
369.1 ms    Xorg_xcb_util_cursor_jll
366.5 ms    Xorg_libXinerama_jll
353.0 ms    Xorg_libXrandr_jll
357.9 ms    Libglvnd_jll
876.7 ms    Conda
374.0 ms    Xorg_libXcursor_jll
372.8 ms    Xorg_libXi_jll
337.5 ms    Xorg_xkbcomp_jll
1303.9 ms    Cairo_jll
500.1 ms    Xorg_xkeyboard_config_jll
361.3 ms    xkbcommon_jll
785.7 ms    HarfBuzz_jll
429.1 ms    Vulkan_Loader_jll
736.5 ms    libass_jll
751.5 ms    Pango_jll
3102.8 ms    IJulia
346.8 ms    libdecor_jll
6470.8 ms    PlotUtils
458.7 ms    GLFW_jll
3171.2 ms    FFMPEG_jll
2402.5 ms    PlotThemes
3813.5 ms    Qt6Base_jll
719.7 ms    FFMPEG
706.8 ms    Qt6ShaderTools_jll
11441.9 ms   HTTP
3280.1 ms    RecipesPipeline
1043.0 ms    GR_jll
1210.7 ms    Qt6Declarative_jll
257.1 ms    Qt6Wayland_jll
2079.8 ms    GR
30640.6 ms   Plots
2820.4 ms    Plots → UnitfulExt
3152.2 ms    Plots → IJuliaExt
111 dependencies successfully precompiled in 59 seconds. 77 already precompiled.

```

This next cell loads packages which are required for the rest of the code evaluation. In this case, we only need to load the `Plots.jl` plotting package, but you will see others over the course of the semester (and can add more if desired; just make sure that you’ve [added the new packages to the environment](#)). Standard Julia practice is to load all of the needed packages at the top of the file.

Warning

Loading packages can take a while, especially the first time! Julia tries to precompile all of the packages you're using so repeat use is faster, but this can be quite slow at first.

```
using Plots
```

Introduction

Julia

Julia is an up-and-coming language, originally developed for scientific programming. While learning a new programming language always has its hiccups, the good news is that if you've programmed in a high-level language such as Python or MATLAB, most Julia concepts should look familiar.

If you have not successfully set up Julia, follow the instructions in [Tools Setup](#) and/or ask for help.

You can use other editors for this course, but our recommendation is [Visual Studio Code](#) with the [Julia extension](#), which will make life a *lot* simpler! You should have set this up by following the [Tools Setup](#) instructions, but if not, do so now and/or ask for help.

Jupyter Notebooks

Jupyter notebooks integrate text and equations in Markdown with Julia (or Python, or R) code. To do this, Jupyter notebooks consist of two types of “cells”: code cells and Markdown (text) cells.

Click once on this section of text. A box will appear around this text (and some areas above/below it) - all of that is within this cell.

Markdown is a text markup framework for formatting language that makes things look pretty when viewed across different platforms: web browsers, notebooks, and so forth. Text written in Markdown can also include hyperlinks, LaTeX equations, section headers, and images, among other features (most of [the course website](#) and the lecture notes were all written in Markdown!). [Here is a basic Markdown cheat sheet](#).

What you are looking at right now is the formatted text after the Markdown is processed. To see the raw Markdown, do one of:

- press **Enter** while that cell is selected, or
- double-click on that cell.

A couple of the features you will see in this Markdown cell:

- The --- command creates a horizontal line. This is also nice for separating sections.
- Backticks (`...`) can be used to format and highlight code, keystrokes, etc.
- The # sign is used to create a new section header; two # signs (##) is used to create a new subsection header; ### creates a subsubsection, and so on.
- You can create a bulleted list by using the asterisk * or a dash - and a space.
- You can create regular text by just typing as usual.
- You can create **bold-faced text** by wrapping it with two asterisks on both sides.
- You can create *italicized text* by wrapping it with a single asterisk on both sides.
- To create a new paragraph, you must include a blank line between the old and new paragraphs.

At this point you might be wondering how to turn this cell back into the fully formatted Markdown text instead of the raw Markdown you're probably still looking at. You have a couple of options, depending on your platform, but the most consistent is to type **Shift + Enter** to **execute** the cell (this is also how to run code, but more on that later).

Additionally, you will frequently need to create new cells in your Jupyter notebooks. How you do this will depend on how you interact with the notebook, but try to figure this out now.

One tip is to think carefully about what bits of code should be in the same cell, as you typically only see output from the last command in a cell. For example, compare the following:

```
x = 5  
sin(x)
```

-0.9589242746631385

with

```
x = 5
```

5

```
sin(x)
```

-0.9589242746631385

In Julia, you can also suppress the output of a command with a semi-colon:

```
sin(x);
```

which can help if you want to split some code out for clarity or to insert some text prior to it, but don't want to clutter the notebook with its output.

For code cells, to execute the commands within the cell, we also press **Shift+Enter**.

Finally, **make sure that you evaluate all of the code cells in order before submitting**. One bad outcome with notebooks occurs when cells are evaluated out of order, so fixed bugs and edits in previous cells do not get a chance to propagate down. You can do this with the **Run All** command in whichever interface you're using to edit your notebook.

Julia Basics

There are many tutorials and references for Julia, including a [basics overview on the class website](#). Please feel free to reference these as you work through any part of the course.

Formatting Math

It will often be helpful to include nicely-formatted mathematics in a notebook. Markdown accomodates this using LaTeX syntax. A LaTeX cheatsheet is available on the class website, and many other guides exist online.

Below is an example of a formatted equation:

$$x = 5.$$

Looking For Help

There is no shame in using Google, or other resources, for help when programming. There are many, many times when you can't quite get the syntax to work, can't quite figure out the right package or command to use, or are feeling too lazy or overwhelmed (I'm not judging either of those!) to dig through the documentation. Some good resources include:

- [Stack Overflow](#) is a treasure trove of answers;
- The [official Julia forum](#) and the [Julia Subreddit](#) are also very useful.

You are also highly encouraged to post on [Ed Discussion](#), though getting a response might be less immediate. Just be mindful that to get good answers, [you have to help people help you](#), and **make sure to give credit to any resources that were helpful!**

Exercises (3 points)

Use your understanding of Julia syntax and the GitHub workflow to complete the following (hopefully short) exercises. Convert your completed lab assignment to a PDF and submit it to the Gradescope Assignment “Lab 1”.

Remember to:

- Include a (succinct but clear) writeup of the core idea underlying your code, through some combination of equations, text, and algorithms. As you are not required to submit your code, we will not be looking at it in detail, and instead will rely on those writeups to assess whether your approach is correct.
- If using the notebook, evaluate all of your code cells, in order (using a **Run All** command). This will make sure all output is visible and that the code cells were evaluated in the correct order.
- Tag each of the problems when you submit to Gradescope; a 10% penalty will be deducted if this is not done.

Computing a Dot Product

Given two numeric arrays x and y , write a function to compute their dot product if they have equal length, and return an error if not (this is useful for debugging!). Use the following code as a starting point. **Do not use a built-in function.**

```
function dot_product(x, y)
    if length(x) == length(y) # insert test condition for equal lengths
        # compute and return dot product
        return sum(x[i] * y[i] for i in 1:length(x))
    else
        throw(DimensionMismatch("length of x not equal to length of y"))
    end
end
```

`dot_product` (generic function with 1 method)

Writeup

For the first `if` statement, I was checking if numeric arrays x and y have equal length by using the `length` function and `==` operator. If this statement is true, it will return the product of the corresponding item in both arrays, and then summing all of them together; this is completed using a for loop. The `else` statement was provided, which I searched and understood

`DimensionMismatch` is a built-in exceptor, together with `throw` and the string, this line of code is used to identify errors.

Here are some tests to make sure your code works as intended. Tests like these are useful to make sure everything works as intended. One reason to split your code up into functions is that it makes it straightforward to write tests to make sure each piece of your code works, which makes it easier to identify where errors are occurring.

```
dot_product([1 2 3], [4 5 6])
```

32

If you know the value you should get, you can write a more formal test using the `@assert` macro, which is a good way to “automate” checking (since you get an obvious error if the code doesn’t work as desired):

```
@assert dot_product([1 2 3], [4 5 6]) == 32
```

Let’s also make sure we get an error when the dimensions of the two vectors don’t match:

```
dot_product([1 2 3], [4 5])
```

```
DimensionMismatch: DimensionMismatch: length of x not equal to length of y  
DimensionMismatch: length of x not equal to length of y
```

Stacktrace:

```
[1] dot_product(x::Matrix{Int64}, y::Matrix{Int64})
```

```
@ Main ~/Desktop/Cornell_Courses/FA_25/BEE_4750/Lab01/jl_notebook_cell_df34fa98e69747e1a8:
```

```
[2] top-level scope
```


```
@ ~/Desktop/Cornell_Courses/FA_25/BEE_4750/Lab01/jl_notebook_cell_df34fa98e69747e1a8f8a73:
```

Making a Plot

Write a function to compute the square of an integer x . Evaluate this function for integers between $x = -5$ and $x = 5$ and make a plot of the squared values (you can find a quick guide to making various types of plots [here](#)). Make sure to label your axes.

```
# insert your code here
function square_int(x)
    return x^2
end

x = -5:5
y = square_int.(x)
plot(x, y, label = "y = x^2", xlabel = "x", ylabel = "y", title = "Plot of y = x^2")
```

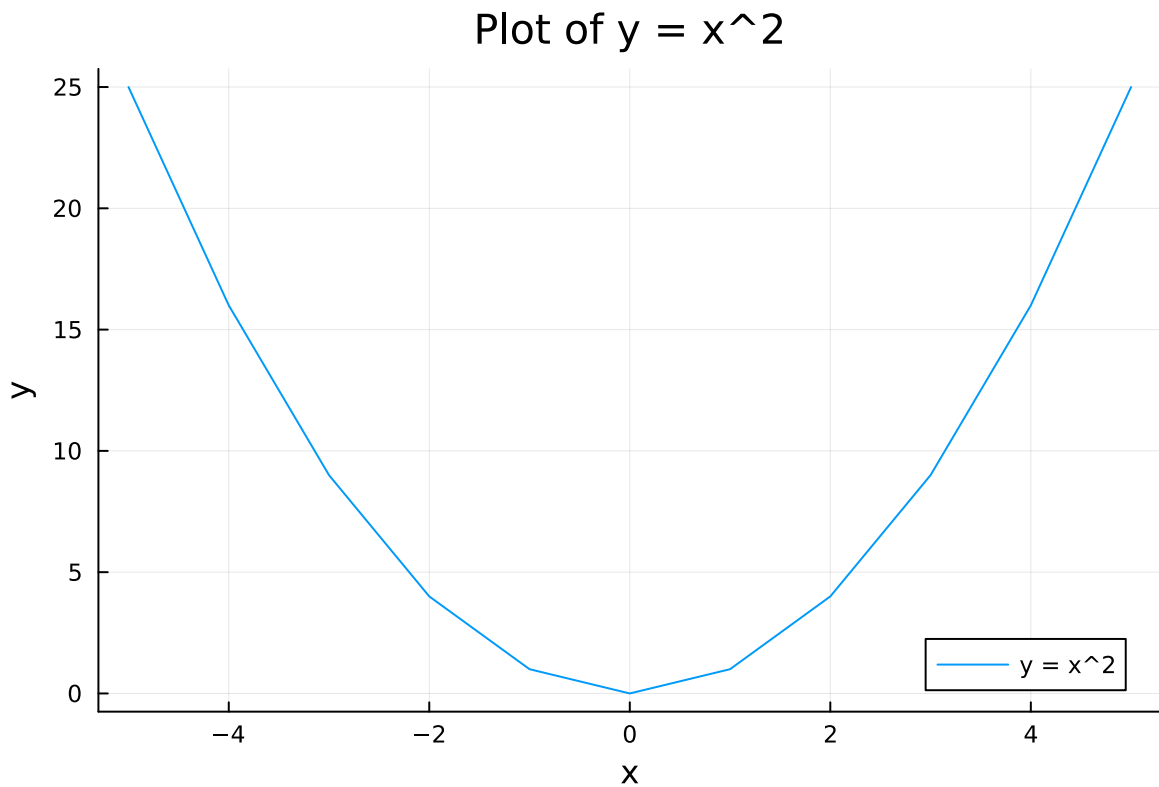

Writeup

I first created a function called `square_int` with a variable input x . This function returns the calculated square value for x . I then assigned a range from -5 to 5 for x , assigned y to be the

list of squared x values. Then I plotted y vs. x , giving them labels to signify $y = x^2$, as well as axis and plot titles.

Commit and Push Your Changes to GitHub

After completing the previous two exercises, commit your solution file (notebook or otherwise) and push to GitHub. Use an informative commit message which makes it clear what changes you've made. The specific workflow for this will vary depending on how you're writing up your solutions; please search for specifics and ask for help as needed!

Useful Commit Sizes

Ideally, you'd commit whenever you make a "substantial" enough change that you want to lock in, such as writing the core code for a problem or completing a problem, if you're preparing code to be used elsewhere (by yourself or others), or if you want to ask for help. `git` lets you revert changes back to a previous commit, so it's easy to undo changes or updates which broke something that was previously working, so changing too many things at once can make it hard to keep track of what worked when.

But in this case, go ahead and just commit after finishing the problems.

Push the repository with these commits to GitHub and take a screenshot of the repository page (<https://github.com/BEE4750-FA25/<username>/lab01>) which shows the updated repository. Include that screenshot in your submission as the solution to this problem.

Note:

I pushed updated versions multiple times and the attached photo is one of the commits. I also pushed after `render.yml` is updated in the workflows folder.

Submitting PDF

Important

These submission instructions will not be repeated on future assignments!

Export your writeup as a PDF (this doesn't have to be a notebook if you're struggling to export: you can do your writeup in *e.g.* Microsoft Word) and submit it to the "Lab 1" assignment on Gradescope. **Make sure that you tag pages corresponding to relevant problems to avoid a 10% penalty.**

Printing Code to PDF

You are not required to submit your code when submitting assignments. However, when printing a notebook to PDF (whether you do this locally or via the GitHub Action), long lines will run off the edge of code cells, which may result in comments or code being hidden. If you see this, go back to the notebook and break up long lines into shorter ones (for example, see the comment in the above code cell) to ensure key parts of your results aren't missing.