



# **Sprint 1 Challenge**

# **Mine Sweeper**

#### **Preface**


Your challenge is to create the **Minesweeper game**, and it's not an easy one.


Let's practice some breaths.

Good.

Important note: Read the entire document below before starting to code.

Play the game a little bit, get to know it functions and relax

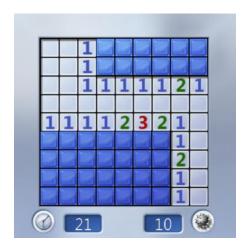

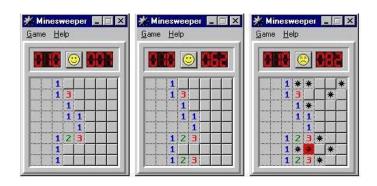

It's a good thing we studied about Matrices. Isn't it?





# **Software Delivery Phases - Instructions**

In this sprint we will work alone, please respect the rules!

The Code shall be submitted at 3 delivery events:

- 1. Wednesday 8:30pm Initial
- 2. Thursday 8:30pm Final. The Sprint score will be determined by this delivery (i.e. everything shall be ready in it)
- 3. Saturday 22:00pm Additional

In this delivery you can finish what time might not allowed before – both functionality and CSS. These Deliveries will not affect your sprint score however they will be reviewed and will have contribution to the overall understanding of your coding level along the course.

On Sunday morning – all projects will be presented

Delivery of the 3 deliveries shall be done as follows:

- 1. At your relevant Dropbox folder
- 2. Upload each delivery phase to GitHub pages and submit your project link trough a form we will provide. Make sure your project works well using that link. Give Github your name so your link will present your name, i.e. danlevy.github.io

# Minesweeper - Basic intro

The goal of the game is to uncover all the squares that do not contain mines without being "blown up" by clicking on a square with a mine underneath.

Minesweeper functionality is based on the <u>reference game</u>







## **Functionality and Features**


- Show a timer that starts on first click (right / left) and stops when game is over.
- Left click **reveals** the cell's content
- Right click flags/unflags a suspected cell (you cannot reveal a flagged cell)



- Game ends when:
  - o LOSE: when clicking a mine, all mines should be revealed
  - WIN: all the mines are flagged, and all the other cells are shown
- Support 3 levels of the game
  - Beginner (4\*4 with 2 MINES)
  - Medium (8 \* 8 with 12 MINES)
  - Expert (12 \* 12 with 30 MINES)
- If you have the time, make your Minesweeper look great.
- Expanding: When **left clicking** on cells there are 3 possible cases we want to address:
  - MINE reveal the mine clicked
  - o Cell with neighbors reveal the cell alone
  - Cell without neighbors expand it and its 1<sup>st</sup> degree neighbors












**Expanding Bonus:** (only if time permits) Expand like in the real game ("Full expand"):

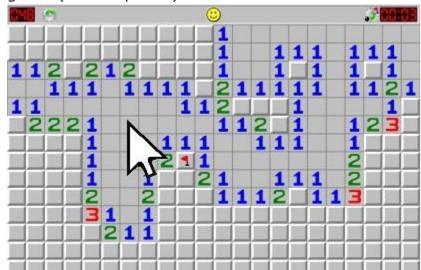

**Comment regarding Bonus Tasks:** implement the NON-Bonus tasks first. The Non-Bonus tasks represent the level required at the stage. Only if you have time – implement the Bonus tasks.





# **Development - Tips and Guidelines**

As you know, there is usually more than one way to approach a challenge.

But as a guideline, we suggest having the following functions (it is ok to have more functions as needed).

initGame()	This is called when page loads
buildBoard()	Builds the board Set mines at random locations Call setMinesNegsCount() Return the created board
setMinesNegsCount(board)	Count mines around each cell and set the cell's minesAroundCount.
renderBoard(board)	Render the board as a  to the page
<pre>cellClicked(elCell, i, j)</pre>	Called when a cell (td) is clicked
cellMarked(elCell)	Called on right click to mark a cell (suspected to be a mine) Search the web (and implement) how to hide the context menu on right click
<pre>checkGameOver()</pre>	Game ends when all mines are marked, and all the other cells are shown
<pre>expandShown(board, elCell, i, j)</pre>	When user clicks a cell with no mines around, we need to open not only that cell, but also its neighbors.
	NOTE: start with a basic implementation that only opens the non-mine 1 <sup>st</sup> degree neighbors
	BONUS: if you have the time later, try to work more like the real algorithm (see description at the Bonuses section below)





Here are the global variables you might be using:

```
gBoard - A Matrix
                                The model
containing cell objects:
Each cell: {
    minesAroundCount: 4,
    isShown: true,
    isMine: false,
    isMarked: true
gLevel = {
                                This is an object by which the
    SIZE: 4,
                                board size is set (in this case:
    MINES: 2
                                4x4 board and how many mines
};
                                to put)
gGame = {
                                This is an object in which you
    isOn: false,
                                can keep and update the
    shownCount: 0,
                                current game state:
    markedCount: 0,
                                ison: Boolean, when true we
    secsPassed: 0
                                let the user play
}
                                shownCount: How many cells
                                are shown
                                markedCount: How many cells
                                are marked (with a flag)
                                secsPassed: How many seconds
                                passed
```





## **Development - How to start?**

Breaking-down the task to small tasks is a key success factor. In our case – we recommend starting from the following steps:

## Step1 – the seed app:

- 1. Create a 4x4 gBoard Matrix containing Objects. Place 2 mines **manually** when each cell's isShown set to true.
- 2. Present the mines using renderBoard() function.

## Step2 - counting neighbors:

- Create setMinesNegsCount() and store the numbers (isShown is Still true)
- 2. Present the board with the neighbor count and the mines using renderBoard() function.
- 3. Have a console.log presenting the board content to help you with debugging

## Step3 - click to reveal:

- Make sure your renderBoard() function adds the cell ID to each cell and onclick on each cell calls cellClicked() function.
- 2. Make the default "isShown" to be "false"
- 3. Implement that clicking a cell with "number" reveals the number of this cell

# Step4 - randomize mines' location:

- 1. Randomly locate the 2 mines on the board
- 2. Present the mines using renderBoard() function.

<u>Next Steps</u>: Head back to **Functionality and Features** and then on to **Further Tasks**, and if time permits check out the **Bonus Tasks** section.





#### **UI Guidelines**

This sprint is not a UI-centered project. However, we recommend to try implementing the following UI concepts:

- 1. Board is square and cells are squares
- 2. Cells keep their size when hovered and when revealed
- 3. Board keeps its position (shouldn't move) along all game phases (do not add UI elements dynamically above it)
- 4. Mines look like mines.
- 5. Add a footer at the bottom of the page with your full name.

#### **Further Tasks**

#### First click is never a Mine

Make sure the first clicked cell is never a mine (like in the real game)

HINT: place the mines and count the neighbors only on first click.

#### Lives

Add support for "LIVES" -

The user has 3 LIVES:



When a MINE is clicked, there is an indication to the user that he clicked a mine. The LIVES counter decrease. The user can continue playing.





## The Smiley

Add smiley (feel free to switch icons \ images):

- Normal 😀
- Sad & Dead LOSE (stepped on a mine)
- Sunglasses WIN 🤓
- Clicking the smiley should reset the game

# **Bonus Tasks - if time permits**

## **Add support for HINTS**

The user has 3 hints



When a hint is clicked, it changes its look, example:



Now, when a cell (unrevealed) is clicked, the cell and its neighbors are revealed **for a second**, and the clicked hint disappears.

#### **Best Score**

Keep the best score in <u>local storage</u> (per level) and show it on the page

# **Full Expand**

When an empty cell is clicked, open all empty cells that are connected and their numbered neighbors (as is done at <a href="mailto:the">the</a> game) this feature is normally implemented using recursion.

**coding\_** academy



#### Safe click

Add a Safe-Click Button:

The user has 3 **Safe-Clicks** 

Clicking the **Safe-Click** button will mark a random covered cell (for a few seconds) that is safe to click (does not contain a MINE).

Present the remaining Safe-Clicks count



# **Manually positioned mines**

Create a "manually create" mode in which user first positions the mines (by clicking cells) and then plays.

#### Undo

Add an "UNDO" button, each click on that button takes the game back by one step (can go all the way back to game start).



#### **7 BOOM!**

Add an "7 BOOM!" button, clicking the button restarts the game and locate the MINES according to the "7 BOOM" principles (each **cell-index** that contains "7" or a multiplication of "7"). Note that the **cell-index** shall be a continuous number (i.e. in a 8\*8 Matrix is shall be between 0 to 63).

--- *and that's it ---*