## FR3D User's Manual

## **Table of Contents**

Table of Contents	1
Installation	2
Running FR3D from Matlab	2
Using the compiled version of FR3D for the PC	
Step-By-Step Tutorial on Performing Motif Searches using FR3D	3
Performing a Purely Geometric Search with FR3D	3
Performing Mixed Geometric and Symbolic searches with FR3D	12
Conducting Symbolic searches with FR3D	25
Viewing candidates	31
Listing Candidates	
Writing Candidates into a PDB File	41
Sorting by Centrality	
Grouping candidates	
Aligning candidates	46
Retrieving the results of previous searches	47
Discrepancy and relaxed discrepancy	48
User-maintained lists of PDB files	
Appendix	
References	51

#### Installation

### Running FR3D from Matlab

Installation: FR3D was written in Matlab version 7.1 and has been run successfully on PC, Macintosh, and UNIX platforms. The easiest way to install it is to download the file FR3D-4-Analyzed-Files.zip and unzip it. It will create a folder named FR3D and several subfolders. It has pre-computed data for four large PDB files. Then download the current version of the Matlab programs and unzip it in the FR3D folder. It includes program files (.m extension), data files (.mat extension), and figure files (.fig extension).

If you don't begin by downloading the analyzed files, first create a folder **FR3D** and unzip the current version of the Matlab programs there. Create a subfolder called **PDBFiles** to store the PDB files (.pdb extension). Create subfolders **PrecomputedData** and **SearchSaveFiles** as well. For this manual, we assume that the file **1s72.pdb** is present in the folder **PDBFiles**, or that the file **1s72.mat** is present in the folder **PrecomputedData**.

If you already have a FR3D installation, download the current version of the Matlab code, unzip, and copy the new program files over the old ones in the **FR3D** folder.

If you have another folder on your computer with PDB files, add that folder to Matlab's path (File, Set Path, Add Folder). The first time FR3D is asked to search a given PDB file, it reads the text, analyzes it, and saves a data file in the subfolder **PrecomputedData**. After that, it will not need to re-read the original PDB file.

Launching the Graphical User Interface (GUI): Start Matlab and change the working directory to **FR3D** (you can use the cd command to change the directory). At the command prompt >>, type FR3D\_GUI to launch the graphical user interface

*Matlab 6 users:* The program has been lightly tested with Matlab 6. The **.mat** data files distributed with the programs are saved in a Matlab 6 format. The data files in FR3D-4-Analyzed-Files.zip are saved with Matlab 7.1, however. You will need to get the original PDB files and have FR3D analyze them. Download them and place them in the **PDBFiles** folder.


### Using the compiled version of FR3D for the PC

Installation: First download and install the Matlab MCR installer (100 MB). MCR stands for Matlab Component Runtime. It lets you run compiled Matlab programs without purchasing Matlab. You can read about it at the Matlab website. Download the file FR3D-4-Analyzed-Files.zip and unzip it. It will create a folder named FR3D and several subfolders. Download the current compiled version of FR3D. Unzip all executable files (.exe extension) and data files (.mat extension) into the FR3D folder. For this manual, we assume that the file 1s72.pdb is present in the folder PDBFiles, or that the file 1s72.mat is present in the folder PrecomputedData.

Running FR3D: Double click the executable file **FR3D\_GUI.exe** to launch the graphical user interface to **FR3D**.


# **Step-By-Step Tutorial on Performing Motif Searches using FR3D**

In this tutorial, we will take you through a step-by-step approach to performing a Sarcin/ricin motif search, using purely geometric, symbolic and mixed parameters. Each step will have a red arrow ( ), which will direct the user to the step which is being explained. For each search we will be focusing on a sub-motif of the Sarcin/ricin shown below. The six nucleotides are 2701, 2702, 2703, 2691, 2693, and 2694 from PDB file 1s72. The interactions involved are G2701/A2694 – trans Sugar Edge/Hoogsteen, A2702/U2693 – trans Hoogsteen/Watson-Crick, and A2703/A2691 – trans Hoogsteen/Hoogsteen. (Leontis, et al., 2002; Leontis and Westhof, 2001)




### Performing a Purely Geometric Search with FR3D

1. The first step is to click on the radio button which says Geometric + symbolic search.

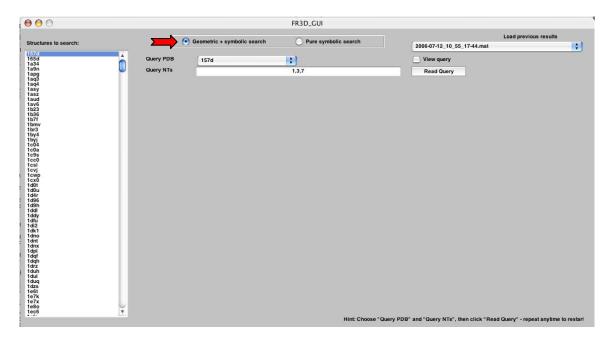


2. The user must specify the PDB file which contains the known motif from the drop-down menu labeled Query PDB. (e.g. 1s72)

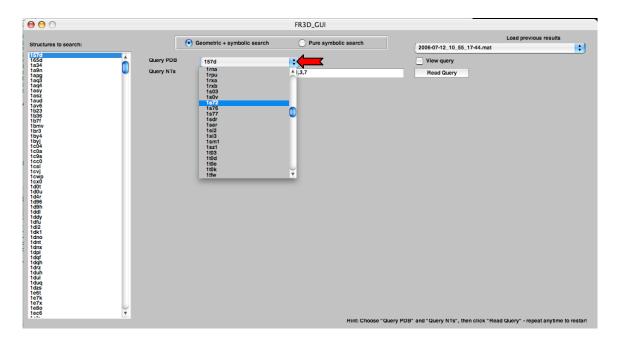


3. The query nucleotides are entered into the text-box, labeled by Query NTs. (e.g. 2701, 2702, 2703, 2691, 2693, 2694. Nucleotide numbers may be separated by commas, spaces, or semicolons. A range of nucleotide numbers may be indicated with a colon, as in 2701:2703. Ranges may be increasing or decreasing. The chain may be indicated with the syntax 2701(0) or 2701\_0, or it may be specified later; see below.




4. The user tells FR3D to read the crystal structure information about the Query motif by pressing the button labeled Read Query. If the user would like to view the motif they inputted, they may check the check-box labeled View query and then press the Read Query button and new figure will pop-up to show the user the Query motif. The interactions present will be displayed in the console window; this will be explained in more detail below.

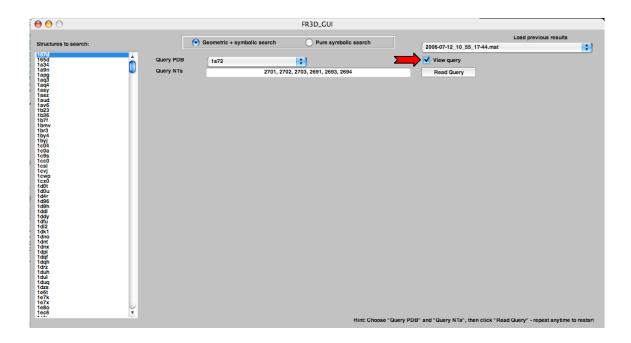


The figure below shows the Query motif, which is displayed by checking the Read query checkbox. It may be rotated in the figure window.

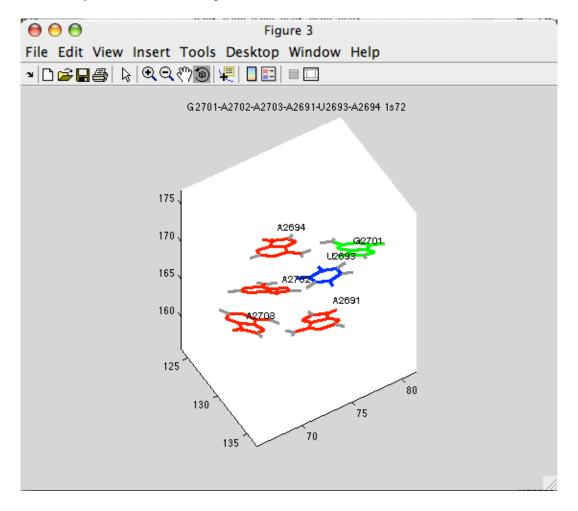


5. Some PDB files have multiple RNA chains. For instance, 1s72.pdb contains a 5S chain and a 23S chain, and both chains have some of the same nucleotide numbers. If there is any ambiguity in the chain for the Query nucleotides, the user must specify the chain which contains the Query motif. This may be selected using the drop-down menu labeled Query Chains. The order of the drop-down menus corresponds to the order of the nucleotides supplied by the user. In this case we are using chain '0'.

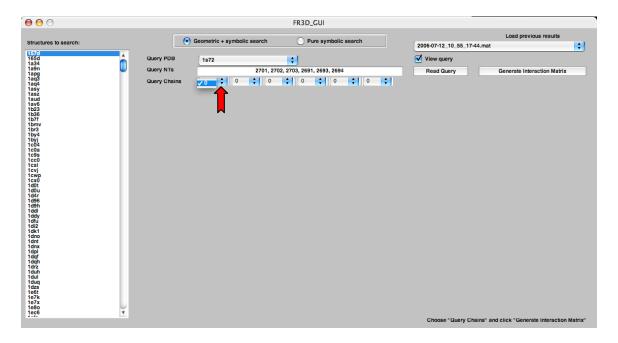


6. Once the chains have been selected the user should press the Generate Interaction Matrix button. The Interaction Matrix allows the user to impose certain types of constraints on the search. A purely geometric search makes no such constraints. Below we describe mixed geometric and symbolic searches and purely symbolic searches.

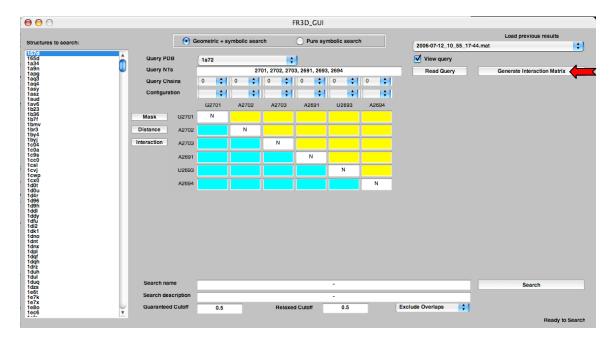


7. The user should give a name to the search in the text-box labeled Search name (e.g., Sarcinricin Motif). This will become part of a filename, so the name should not use characters such as ":", "?", "/" or "\", because these have meanings in filenames and paths.

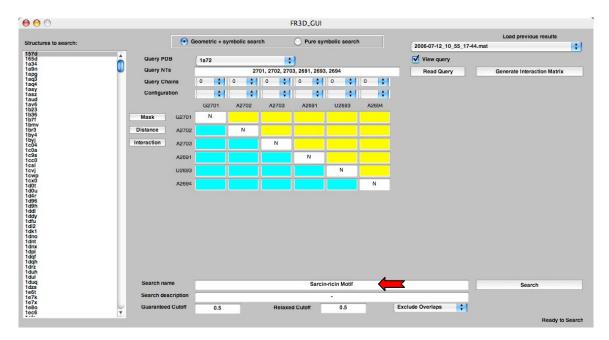


8. The user can add more descriptive information about their search in the text-box labeled Search description (e.g., Geometric – Sarcin/ricin sub-motif comprised of 6 NTs from 23S Haloarcula marismortui). Other comments about the search can be added here as well.

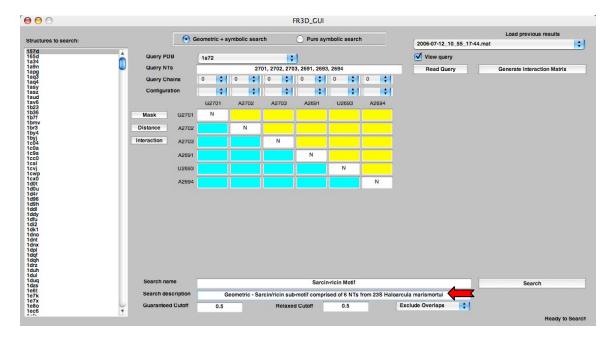


9. The user sets the Guaranteed Cutoff discrepancy in the text-box labeled Guaranteed Cutoff (i.e. 0.5). The search algorithm is guaranteed to find all candidates whose geometric discrepancy with the Query motif is less than this number. The discrepancy is roughly comparable to RMS discrepancy. Increasing the value of the guaranteed cutoff will rapidly increase the running time of the program. Values above 1.0 are often impractical.

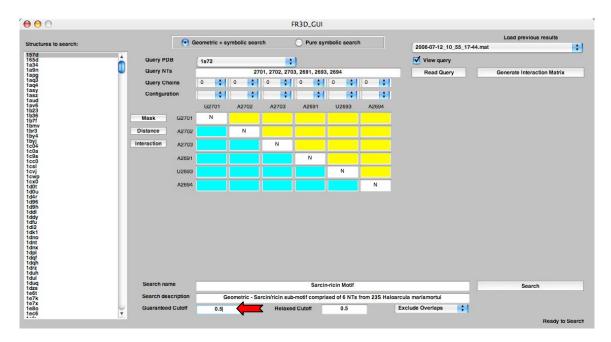


10. The user must specify the Relaxed Cutoff discrepancy, using the text-box labeled Relaxed Cutoff (e.g., 1.0). This number must be equal to or greater than the Guaranteed Cutoff. Making the relaxed cutoff larger than the guaranteed cutoff will retain some candidates which are similar to the Query motif without greatly increasing the running time. The algorithm is not guaranteed to find all candidates whose discrepancy from the Query motif is between the guaranteed cutoff and the relaxed cutoff.

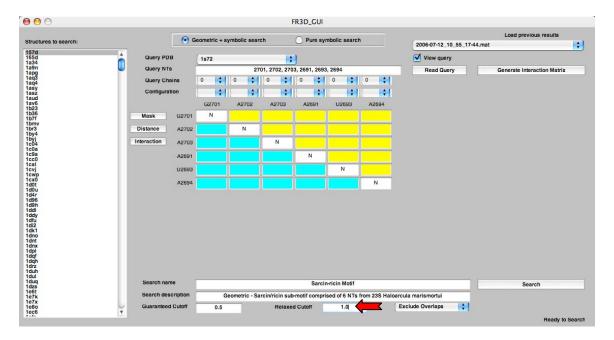


11. Using the drop-down menu to the right of the Relaxed Cutoff text-box, the user can specify whether to Exclude Overlaps or Include Overlaps. An example of this is when performing a search using nucleotides 10, 11, 12, 13, 14, 15 from some PDB file. The algorithm will certainly return the Query motif, but it may also return slight variations of the same motif such as nucleotides 9, 11, 12, 13, 14, 15. These are referring to the same motif, just one nucleotide is different, and so we consider this an overlap, or redundant version of the motif. The option Include Overlaps would keep this candidate, while Exclude Overlaps will remove candidates which have more than half of their nucleotides in common with another candidate having lower discrepancy from the Query motif. In this search we are Excluding Overlaps.

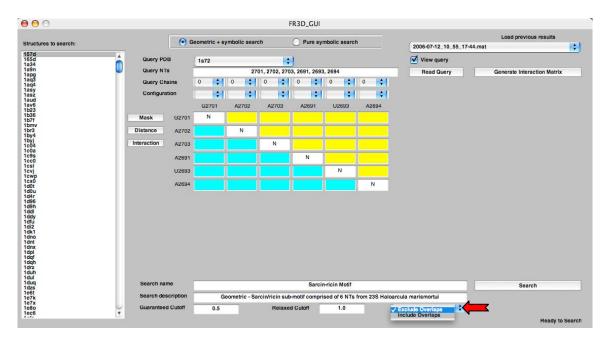


12. Select the PDB files which you would like to search in for your particular motif (i.e. 1qrs, 1qvf, 1rc7, 1s72). On a PC, by holding down the Control key on your keyboard one can select multiple files, which are not consecutive in the list-menu. To do this on a Mac, the user must hold down the Command (or Open-Apple) key. It is possible to make user-defined lists of PDB files to facilitate specifying the PDB files to search, see below.

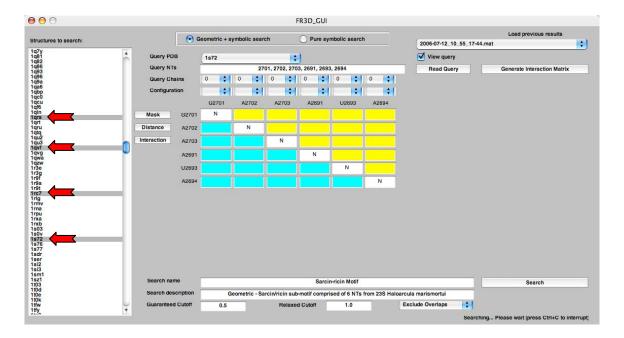

13. Perform the Search by pressing the Search Button. Information about the progress of the search is displayed in the bottom right corner of the GUI. Often, the slowest part of the search is loading PDB data. If a PDB file has not already been analyzed by FR3D, it will need to be analyzed, which is rather slow. Even loading pre-computed data may be slow. The length of the search itself will vary depending on the number of nucleotides in the Query motif and the guaranteed discrepancy cutoff.

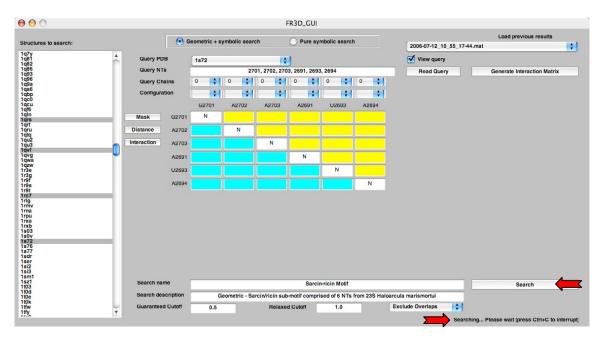


14. Once the search is complete the total number of Candidates found will be displayed in the bottom right corner of the GUI (e.g., 400 Candidates found). To learn about Displaying or Listing Candidates refer to those sections within this manual.

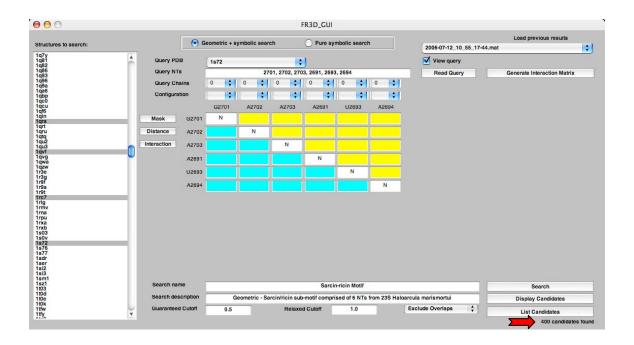


### Performing Mixed Geometric and Symbolic searches with FR3D

We assume the reader has read the previous section on purely geometric searches, and so we focus on what is new in a mixed search.


1. The first step is to click on the radio button which says Geometric + symbolic search.

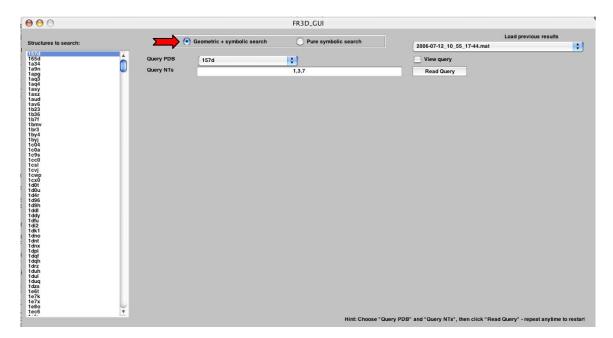


2. The user must specify the PDB file (e.g., 1s72) which contains the known motif from the drop-down menu labeled Query PDB.

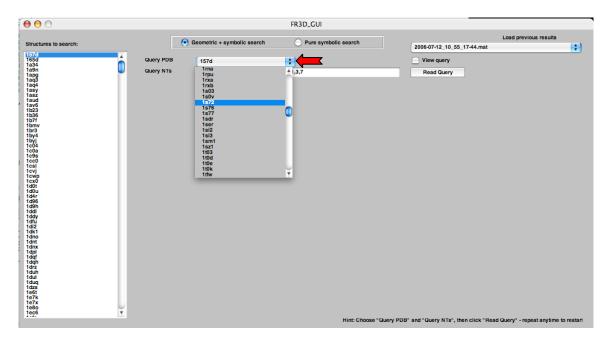


3. The query nucleotides are entered into the text-box, labeled by Query NTs. (e.g., 2701, 2702, 2703, 2691, 2693, 2694).

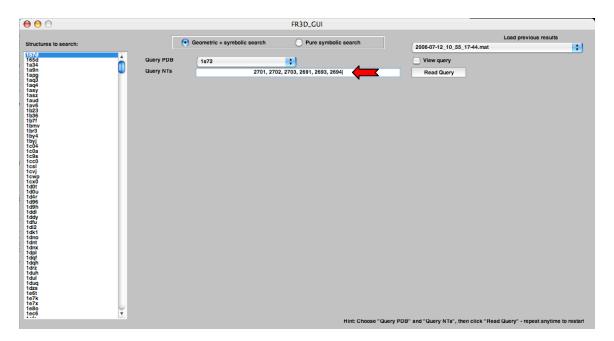


4. Press Read Query. To see the Query motif, check View query before pressing Read Query.

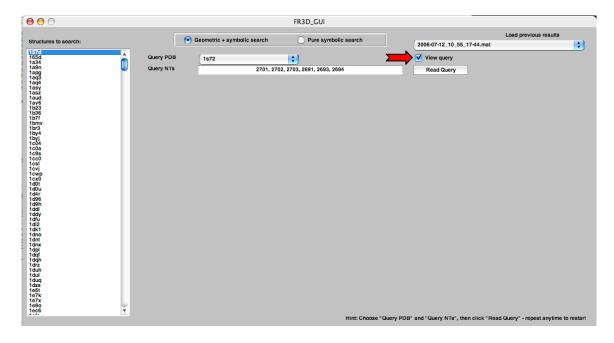

5. The user may use the drop-down menus to select the chain, in case of ambiguity.

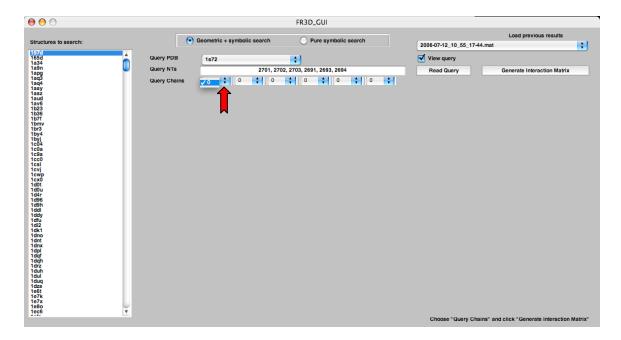

6. The user should press the Generate Interaction Matrix button. When this is pressed an Interaction matrix will appear on the GUI. Now we describe how to focus the search by specifying symbolic constraints which must be met by each candidate. Adding symbolic constraints shortens the running time of the search algorithm.

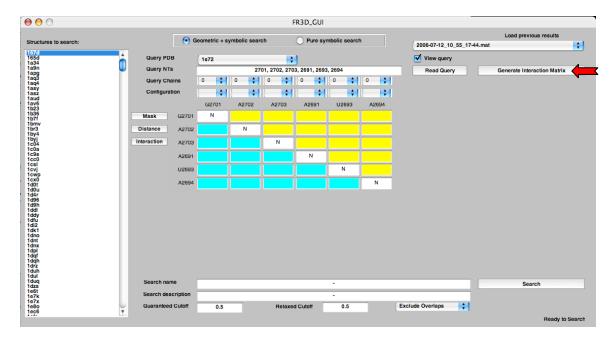

7. The user can specify the glycosidic bond conformation (anti or syn) for each base in their search using the drop-down menu labeled Configuration. The order of the drop-down menus corresponds to the same order as the Query nucleotides. To allow both conformations, leave the selection(s) blank.




8. The user can impose a basepair identify constraint (nucleotide mask) for their search by putting in nucleotide constraints in the text-boxes on the diagonal in the Interaction Matrix, which has a white background. Typing "A," for instance, means that only candidate motifs with an A in the corresponding position will be kept. Typing "AG" allows either A or G, etc. The program uses these standard abbreviations for other combinations:


M for A or C
R for A or G
W for A or U
S for C or G
Y for C or U
K for G or U
V for A, C, or G
H for A, C, or U
D for A, G, or U
N for A, C, or U
N for A, C, or U

Note that N is the default. It is not necessary to use these abbreviations, however. One may also exclude a given base using the syntax "~G" for instance, to exclude candidates with a G in the corresponding position.


The diagonal boxes are also the place to specify certain parameters that modify the definition of the geometric discrepancy. These are described in the pop-up window concerning the mask and in the article Sarver et al. 2007.

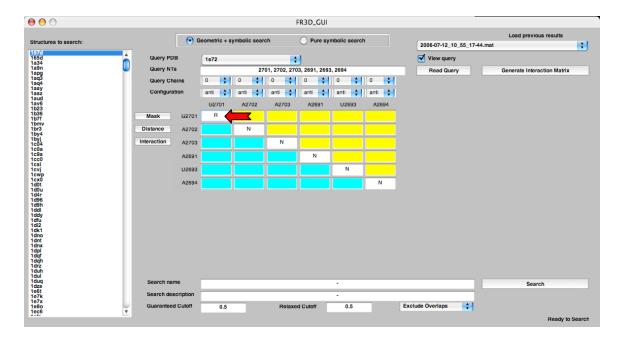


If the user would like to know more information on using masks, they can press the help button labeled Mask.

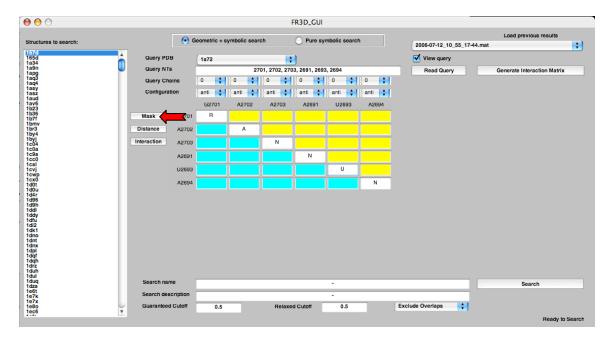


This is the pop-up help menu when the Mask button is pressed.

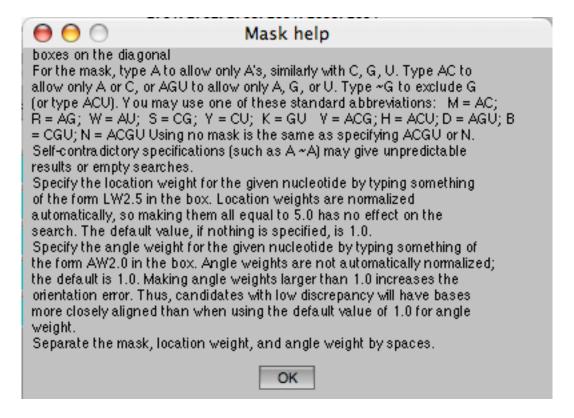


9. The user can impose basepair and base stacking constraints using the text-boxes, which are colored yellow and in the upper right half of the diagonal in the Interaction Matrix (i.e. G2701 (row) forms a trans Sugar Edge/Hoogsteen basepair (tSH) with A2794 (column), A2702-U2693 form trans Hoogsteen/Watson-Crick basepair (tHW), and A2703-A2691 forms a trans Hoogsteen/Hoogsteen basepair (tHH)).

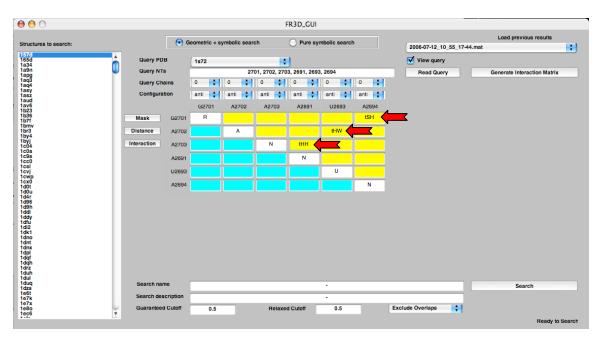


For more information on using the basepair constraints, the user can press the Interaction Button to the left of the Interaction Matrix.

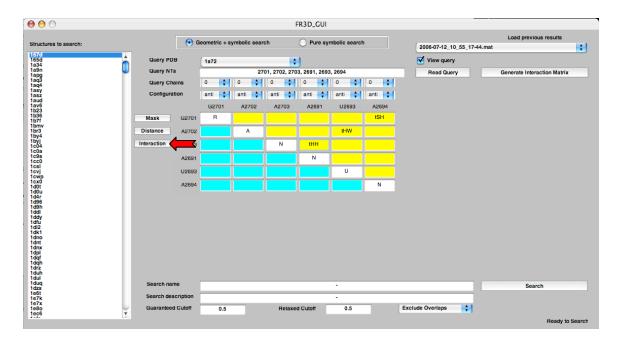


This is the pop-up help menu for the Basepair interactions.

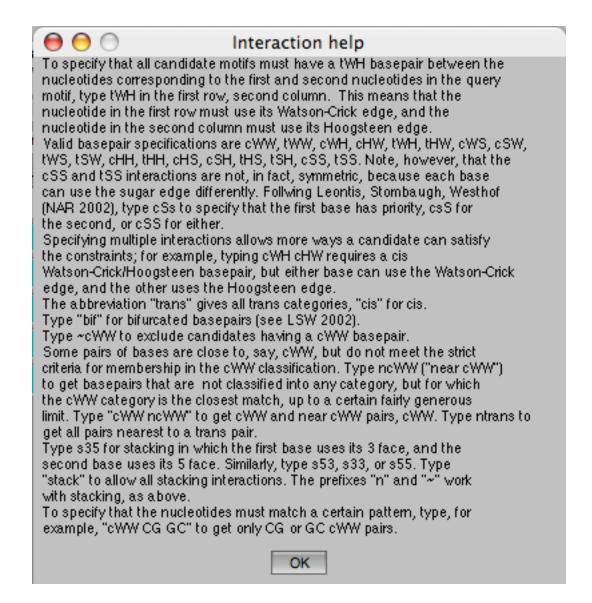


11. The user can put sequence constraints on the search using the text-boxes colored in cyan and are located on the bottom-left of the diagonal. For this search we are only using two constraints which include '> <2' and '> <4'. The first greater-than sign in each example represents that the row nucleotide should be after the column nucleotide sequentially. The second less than signs represent the number of bulged base are allowed between the row and column nucleotides.

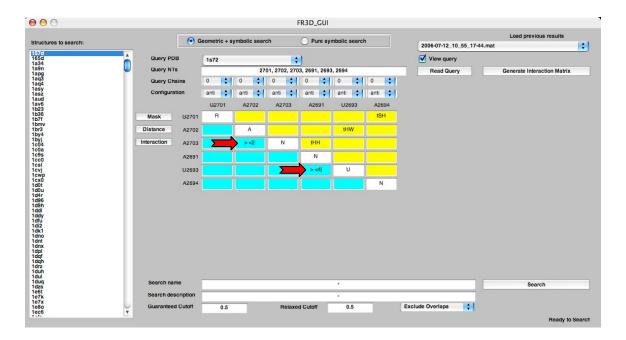


For more information on using the sequence constraints the user can press the Distance buttons located to the left of the Interaction Matrix.

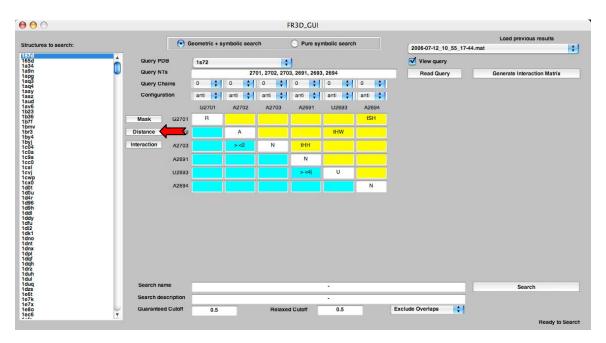


This is the pop-up menu which is displayed after the user presses the Distance button.

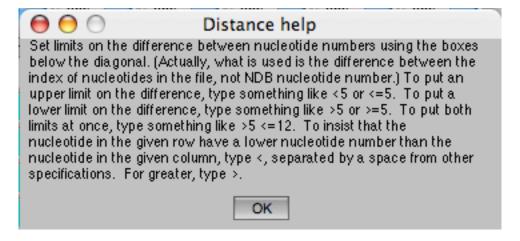


12. The user should enter a name the type of search that they will be performing in the text-box, labeled Search name (i.e. Sarcin-ricin Motif). This will be the name used to recall a previous search, so the name should not use "/" or "\", because these refer to folders. The user can add more descriptive information about their search in the text-box labeled Search description (i.e. Geometric – Sarcin/ricin sub-motif comprised of 6 NTs from 23S Haloarcula marismortui). Other comments about the search can be added here as well.

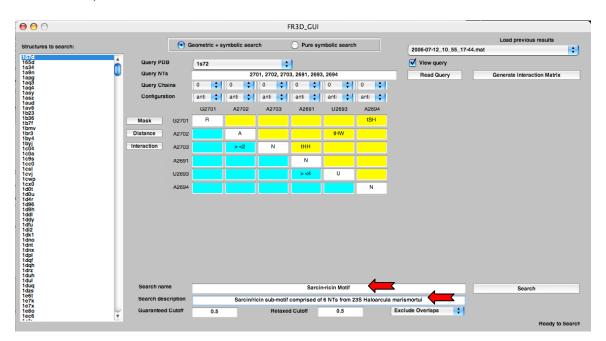


13. The user must set the Guaranteed Cutoff discrepancy, using the text-box labeled Guaranteed Cutoff (i.e. 0.5)

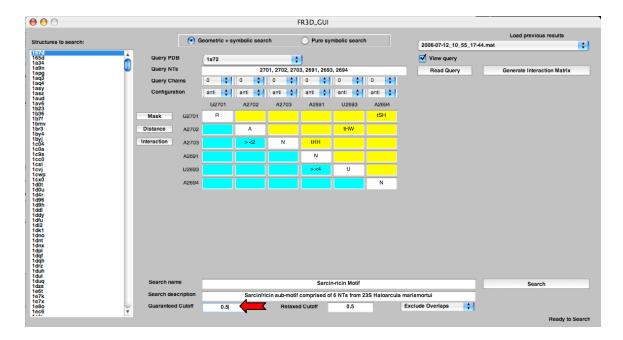

14. The user must specify the Relaxed Cutoff discrepancy, using the text-box labeled Relaxed Cutoff (i.e. 1.0). This number must be equal to or greater than the Guaranteed Cutoff.

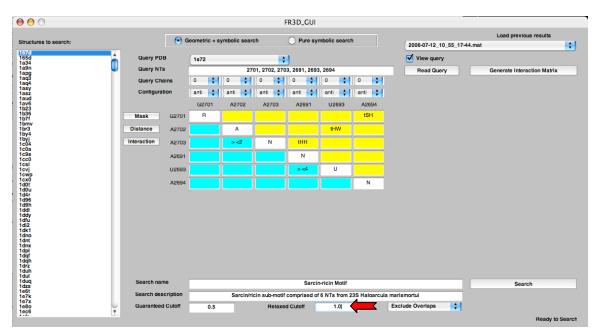


15. Using the drop-down menu to the right of the Relaxed Cutoff text-box, the user can specify whether to Exclude Overlaps or Include Overlaps.

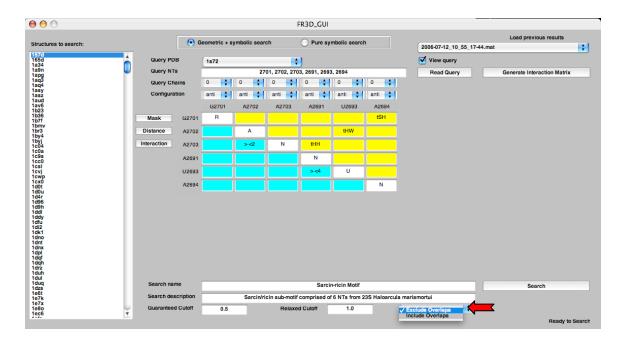


16. Select the PDB files which you would like to search in for your particular motif (i.e. 1qrs, 1qvf, 1rc7, 1s72). On a PC, by holding down the Control key on your keyboard one can select multiple files, which are not consecutive in the list-menu. To do this on a Mac, the user must hold down the Command (or Open-Apple) key. If the user would like to select consecutive file in the list-menu, they should hold down the Shift Key (PC/Mac) and select their files.



17. Perform the Search by pressing the Search Button. Information about the progress of the search is displayed in the bottom right corner of the GUI.

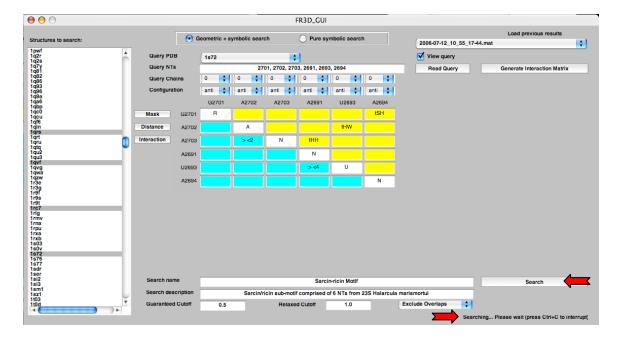

18. Once the search is complete the total number of Candidate will be displayed in the bottom right corner of the GUI (i.e. 400 Candidates found). To learn about Displaying or Listing Candidates refer to those sections within this manual.

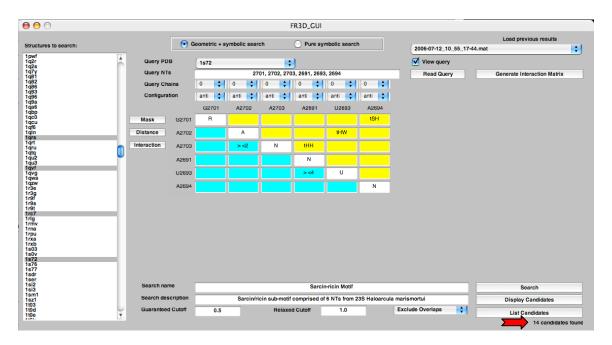

### Conducting Symbolic searches with FR3D

Here we illustrate the ability of FR3D to search for motifs based only on symbolic criteria such as desired basepairing, base stacking, nucleotide identity, and sequential continuity constraints. We assume the reader has read the previous sections and focus only on what is new to purely symbolic searches.

1. Start by selecting Pure symbolic search. Then, the user must enter the number of nucleotides in the motif for which they want to search (e.g., 6).




2. The user should now press the Generate Interaction Matrix button. When this is pressed an Interaction matrix will appear on the GUI.




3. The user can specify the glycosidic bond conformation (anti or syn) for each base in their search using the drop-down menu labeled Configuration. The order of the drop-down menus corresponds to the same order as the Query nucleotides. If the user does not want to restrict the conformation to either anti or syn, they can leave the selection blank, which means both conformations are allowed.




4. The user can impose a mask for their search by putting in nucleotide constraints in the text-box in the Interaction Matrix, which has a white background. The program will take many types of masking letters (i.e. A, C, G, U, R, Y, etc.).

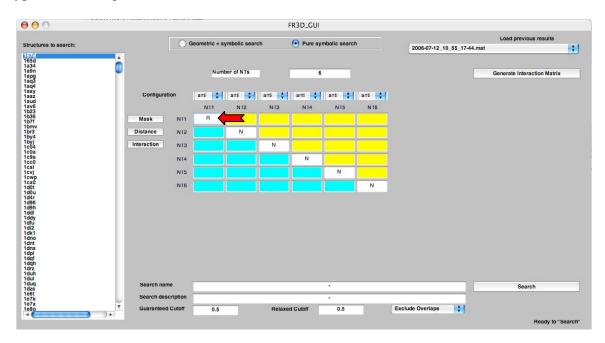


5. The user can impose basepair constraints using the text-boxes, which are colored yellow and in the upper right half of the diagonal in the Interaction Matrix (i.e. G2701 (row) forms a trans Sugar Edge/Hoogsteen basepair (tSH) with A2794 (column), A2702-U2693 form trans Hoogsteen/Watson-Crick basepair (tHW), and A2703-A2691 forms a trans Hoogsteen/Hoogsteen basepair (tHH)).

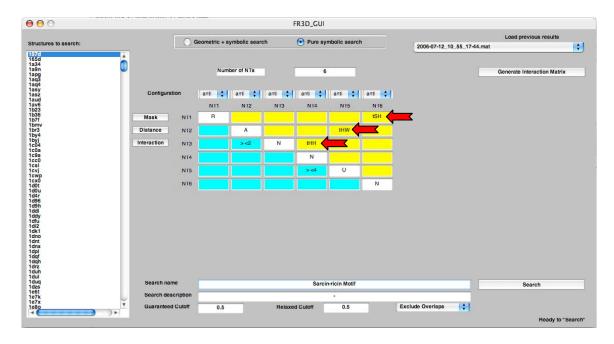

6. The user can put sequence constraints on the search using the text-boxes colored in cyan and are located on the bottom-left of the diagonal. For this search we are only using two constraints which include '> <2' and '> <4'. The first greater-than sign in each example represents that the row nucleotide should be after the column nucleotide sequentially. The second less than signs represent the number of bulged base are allowed between the row and column nucleotides.

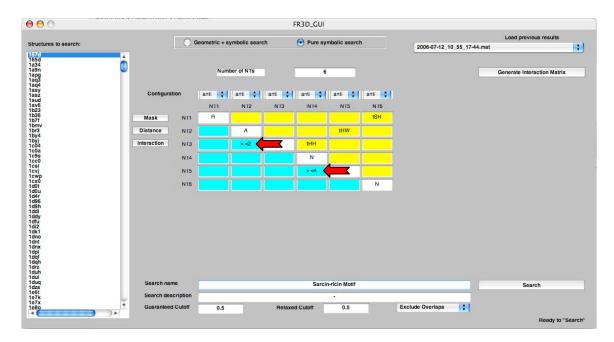


7. The user should enter a name the type of search that they will be performing in the text-box, labeled Search name (i.e. Sarcin-ricin Motif). This will be the name used to recall a previous search, so the name should not use "/" or "\", because these refer to folders. The user can add more descriptive information about their search in the text-box labeled Search description (i.e. Geometric – Sarcin/ricin sub-motif comprised of 6 NTs from 23S Haloarcula marismortui). Other comments about the search can be added here as well.

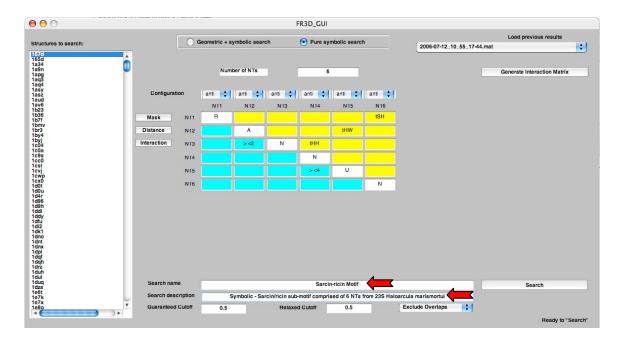

8. For a Symbolic search, the user does not need to specify a Guaranteed or Relaxed Cutoff.




9. Using the drop-down menu to the right of the Relaxed Cutoff text-box, the user can specify whether to Exclude Overlaps or Include Overlaps.

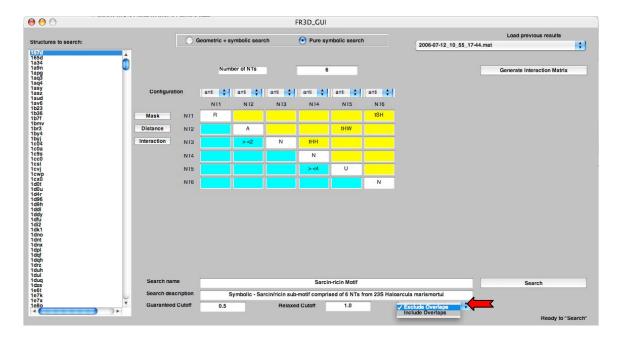

10. Select the PDB files which you would like to search in for your particular motif (i.e. 1qrs, 1qvf, 1rc7, 1s72). On a PC, by holding down the Control key on your keyboard one can select multiple files, which are not consecutive in the list-menu. To do this on a Mac, the user must hold down the Command (or Open-Apple) key. If the user would like to select consecutive file in the list-menu, they should hold down the Shift Key (PC/Mac) and select their files.



11. Perform the Search by pressing the Search Button. Information about the progress of the search is displayed in the bottom right corner of the GUI.

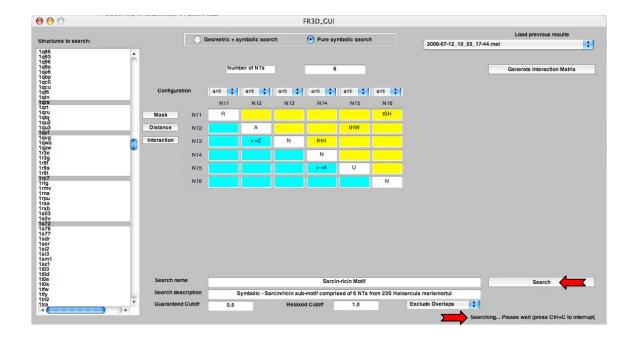


12. Once the search is complete the total number of Candidate will be displayed in the bottom right corner of the GUI (i.e. 400 Candidates found). To learn about Displaying or Listing Candidates refer to those sections within this manual.




## **Viewing candidates**


After performing a Geometric, Symbolic, or mixed search, the user can view the candidate motifs by pressing the Display Candidates button in the bottom-right corner of the GUI. The green arrows will direct the user to places in the figures where changes may have occurred, while the red arrows direct the attention to user actions.

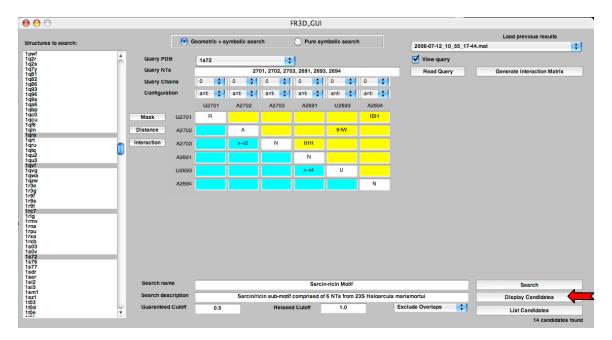


This pop-up figure and menu appear after the user presses the Display Candidates button. The order of the motifs is arranged according to the lowest discrepancy, so the first Candidate should always be the Query motif.

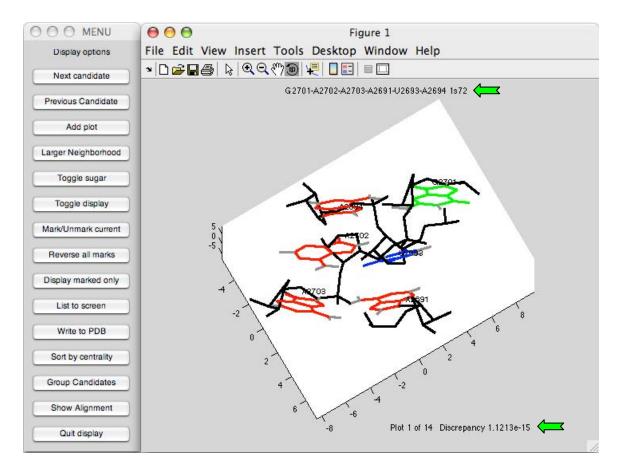


To look at the next Candidate in the user should press the Next Candidate button on the menu. In the figure you can see the next lowest scoring Candidate motif.

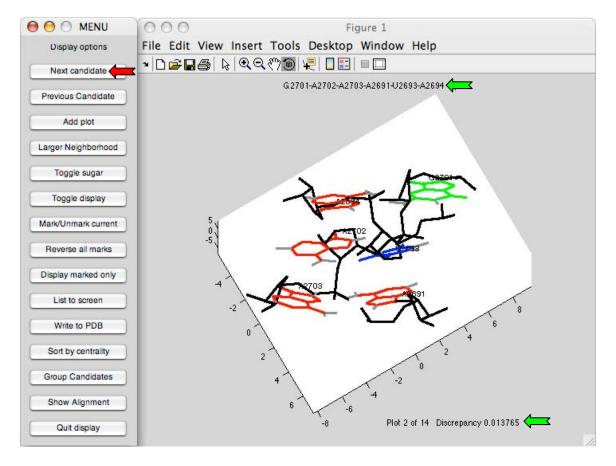

To go back to a previous Candidate, the user should press the Previous Candidate button on the menu. Now the figure refers back to our first Candidate, which is the Query motif.

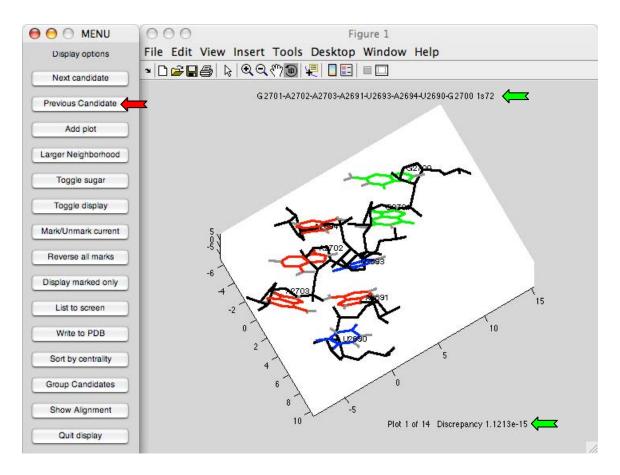


If the user would like to view more than one Candidate a time, they can add more figures, by pressing the Add plot button on the menu. When selecting a particular figure, the user can press Next Candidate or Previous Candidate and the selected figure will change.

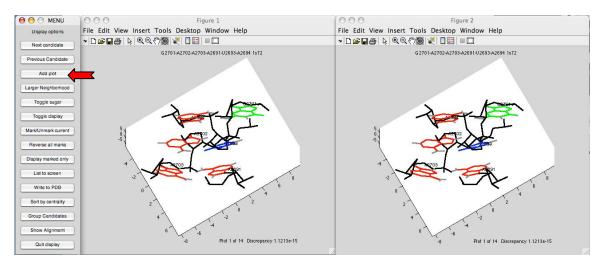


If the user would like to look at the surrounding bases of one of the Candidate motifs, they can press the Larger Neighborhood button. In the figure it should be noted that the nucleotide list


now includes the neighboring bases. By pressing the Large Neighborhood button several times 2 or 3 times, the motif will go back to the original size of the Candidate motif.

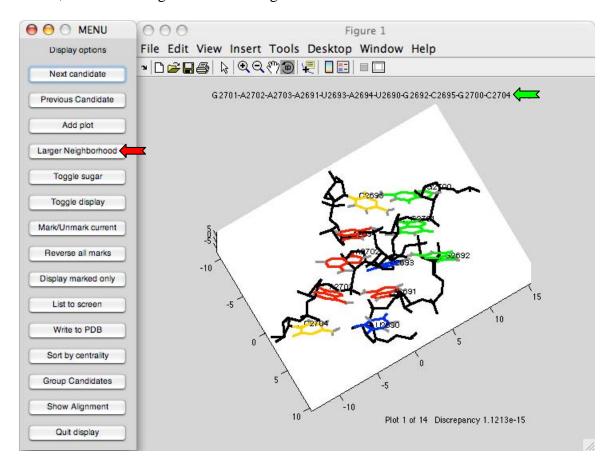

If the sugars are impeding your visualization, the user can press the Toggle sugar button to turn-on or turn-off the sugars as shown in the figure below.

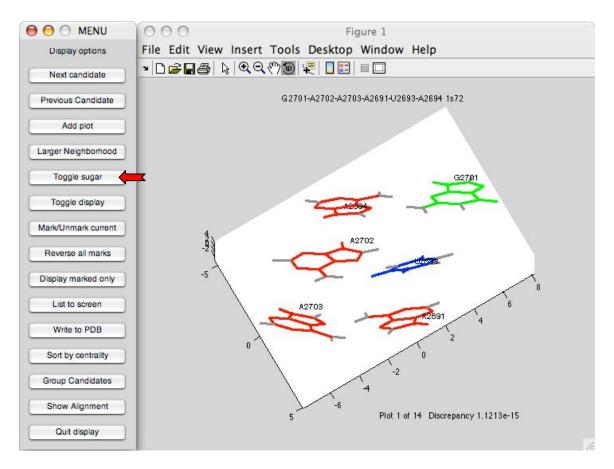


When analyzing the structures of the Candidate motifs, the user can mark each candidate they feel is what they are looking for. Once marked, they can list out just the marked candidates or view just the marked candidates. The default is unmarked, but the figure below, shows that the query motif is marked. This is a very useful when correlating it with some of the other tools, such as writing pdb files, sorting by centrality, grouping candidates and showing an alignment. For example, the user marks 5 of 7 Candidate motifs and then wants to write them out to a pdb file, only the marked Candidates will be written. This idea applies to the other tools in the menu as well.

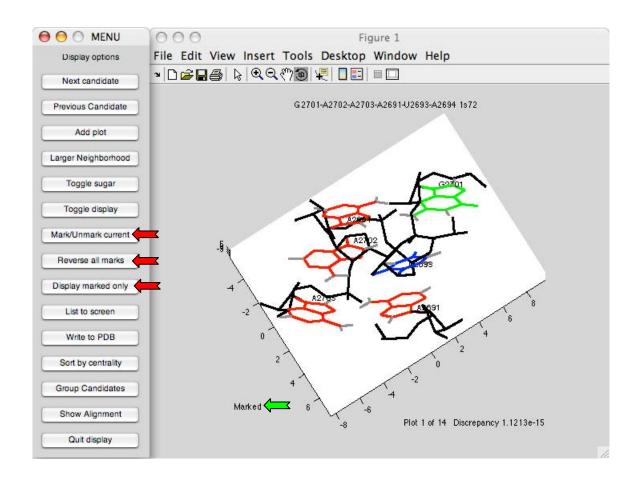


## **Listing Candidates**

There are two methods to list the Candidates:

1) Using the FR3D GUI after performing a search and Candidates are found the user can press the List Candidates button located in the bottom-right corner of the GUI.

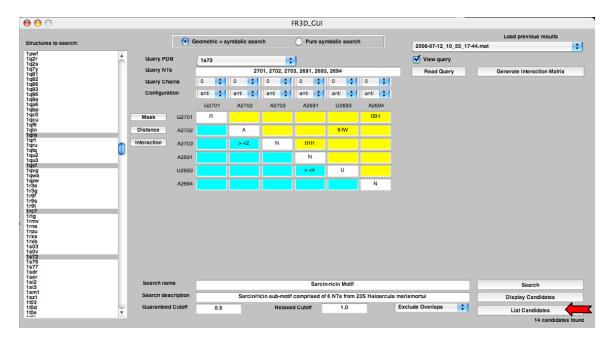

2) When the user is Viewing the Candidates they can press the List Candidates button located on the menu.

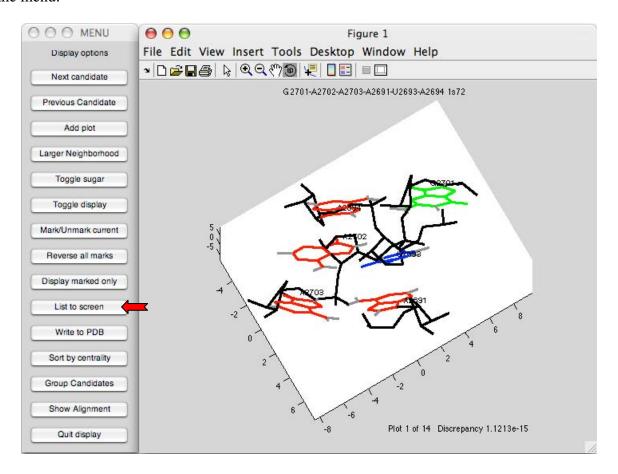

The output is displayed in the Matlab command window or, with the PC executable, in two popup windows. The first columns of the output look like this:

```
Query Sarcin 5 nucleotide geometric: Sarcin/ricin motif with 5 nucleotides, geometric search
Found 137457 possibilities from
                                          1s72 in
                                                    17.109 seconds
Calculating discrepancy
Seconds remaining: 62 56 49 42 36 29 22 14 7
Found 14 candidates in the desired discrepancy range
Removed highly overlapping candidates, kept 14
Entire search took 87.8125 seconds, or
                                             1.4635 minutes
  Filename Discrepancy
                                                3
                                                                 5 Chain
      1s72
                 0.0000
                         G 2692
                                  U 2693
                                          A 2694
                                                   G 2701
                                                           A 2702 00000
      1s72
                 0.0712
                         G 1370
                                  U 1371
                                          A 1372
                                                   G 2053
                                                           A 2054
                                                                   00000
      1s72
                 0.1080
                            381
                                  U
                                     382
                                              383
                                                      406
                                                               407
                                                                   00000
                 0.1275
      1s72
                             588
                                     589
                                              590
                                                      568
      1s72
                 0.1784
                            175
                                  U
                                     176
                                          Α
                                              177
                                                      159
                                                               160
                                                                   00000
                                     465
      1s72
                 0.1844
                             464
                                  U
                                          Α
                                              466
                                                   G
                                                      475
                                                               476
                            358
      1s72
                 0.1976
                                     359
                                          Α
                                              360
                                                      292
                                                               293
                 0.2284
      1s72
                            213
                                                      225
      1s72
                 0.2374
                              78
                                  U
                                          Α
                                               80
                                                   G
                                                      102
                                                           Α
                                                               103 99999
                         G 1971
                                  U 1972
                                             1973
                                                   G 2009
      1s72
                 0.2391
                                          Α
                                                           A 2010 00000
      1s72
                 0.2491
                         G 1292
                                  υ
                                    1293
                                          A 1294
                                                   G
                                                      911
                                                               912 00000
                                                           Α
      1s72
                 0.2714
                           953
                                    954
                                             955
                                                   A 1012
                                                           A 1013 00000
                         G
                                  υ
                                          Α
                 0.4395
                         G 1543
                                  υ
                                          С
                                                     1640
      1s72
                                    1544
                                             1545
                                                   C
                                                                   00000
                                                           A 1641
                            706
                                     707
                                              708
                                                      720
```

The first lines tell details about the search process. FR3D screens out possible candidates to reduce the number of candidates it has to consider in detail. In this example, it found 137457 five-nucleotide motifs which could not be rejected based on the pairwise distances between their constituent nucleotides alone. This took 17 seconds. For each of these, it calculated the geometric discrepancy from the Query motif; this took an additional 70 seconds. Only 14

candidates had discrepancy less than 0.5, the default cutoff discrepancy. These candidates are listed in order of increasing discrepancy. The Query motif is listed first, with discrepancy 0.0000. Each of the five nucleotides is listed, followed by a brief listing of the chains in which the nucleotides are found. Note that the candidate with discrepancy 0.2374 was found in the 5S chain, chain 9.

The full display format includes information about the pairwise interactions between the nucleotides in each candidate, and other information. The output is quite wide, so we use a very small font here:

```
Ouery Sarcin 5 nucleotide geometric: Sarcin/ricin motif with 5 nucleotides, geometric search Found 117457 possibilities from 1e72 in 17.109 seconds

Seconds remaining: 62 56 49 42 36 29 22 14 7

Found 14 candidates in the desired discrepancy range

Removed highly overlapping candidates, kept 14


Filename Discrepancy

13 4 5 Chain 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi 1-2 1-3 1-4 1-5 1-3 1-4 1-5 2-3 2-4 2-5 3-4 3-5 4-5 Confi
```

The columns following the Chain column indicate the basepairing or base stacking interactions between the nucleotides noted at the top of the column. For instance, in each of the candidates, nucleotides 2 and 5 form a tWH (*trans* Watson-Crick / Hoogsteen) basepair. The column headed Configuration indicates the configuration of each base, whether anti (A) or syn (S). The final columns indicate the differences in nucleotide numbers between the indicated nucleotides. This makes it easy to spot local versus composite motifs. In this case, all of the candidates consist of two strands, one corresponding to 2692:2694, the other corresponding to 2701:2702.

#### Writing Candidates into a PDB File

To write the Candidate motifs into a PDB file, which can be view using 3D visualization tools, the user can press the Write to PDB button in the menu.

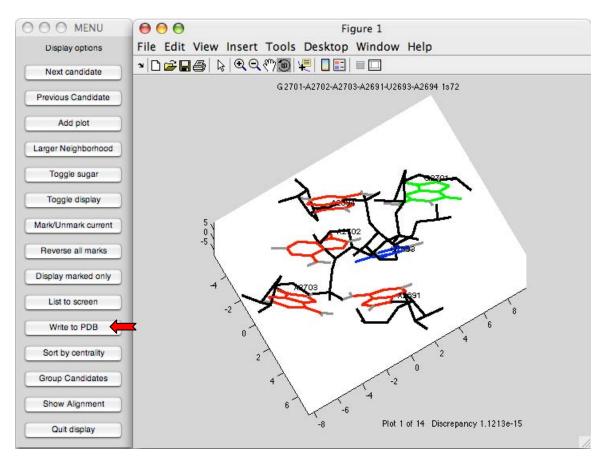


After pressing the Write to PDB but, the pdb filename will be displayed in the command window. The following is an example of an output printed to the command window. The file should be stored in the user's local working directory.

Wrote 2007-01-25\_12\_12\_47-Sarcin-Cand.pdb

### **Sorting by Centrality**

By pressing the Sort by Centrality button on the menu, the user can find the centroid for their Candidate motifs. This is very useful when you want to create new searches, because the user should use the centroid instead of an arbitrary example of the motif.

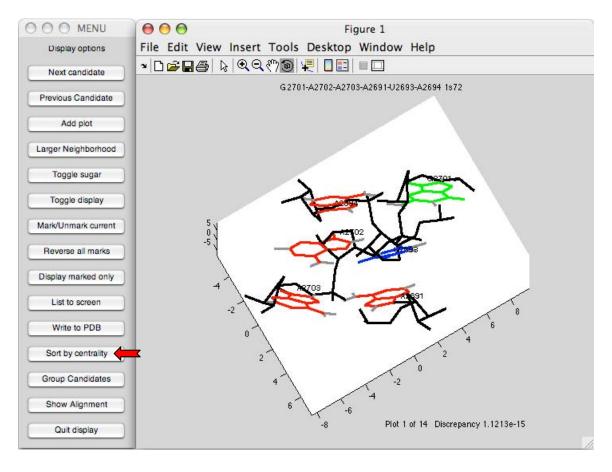


The output for an example motif is shown after it was sorted by centrality. This text will be output to the users command window.

Candidates sorted by centrality within these candidates:


Filonomo Ava	Disamon M	tual ookid					haina
Filename Avg	-						hains
1s72			160 A 1		U 176		000000
1qvf	0.1348 G	159 A	160 A 1	l61 A 174	U 176	A 177	000000
1qvf	0.1377 G	475 A	476 A 4	177 A 463	U 465	A 466	000000
1s72			226 A 2		U 214	A 215	
1s72			476 A 4		U 465		000000
1s72			103 A 1		U 79		999999
1qvf	0.1486 G		226 A 2	227 A 212	U 214	A 215	000000
1qvf	0.1497 G	3102 A3	103 A31	LO4 A3077	U3079	A3080	999999
1s72	0.1525 G	2701 A2	702 A27	703 A2691	U2693	A2694	000000
1qvf			702 A27		U2693		000000
lqvf			054 A20		U1371		000000
_							
1s72			054 A20		U1371		000000
1s72	0.1677 G	406 A	407 A 4	108 A 380	U 382	A 383	000000
1qvf	0.1731 G	406 A	407 A 4	108 A 380	U 382	A 383	000000
Average discrepancy	from othe	rs 0.133	9 File	1s72 Chain	000000		
G159 A160		74 U176					
G159 G(A) ncSH		- s33	tSH				
A160 1 A(A)	s35 ntH		s55				
A161 2 1	A(A) tH		_				
A174 15 14	13 A(A	l) s55	-				
U176 17 16	15	2 U(A)	s35				
A177 18 17	16	3 1	A(A)				

## **Grouping candidates**

The user can group the Candidates motifs to see which Candidate are more similar in geometry by pressing the Group Candidates button in the menu.

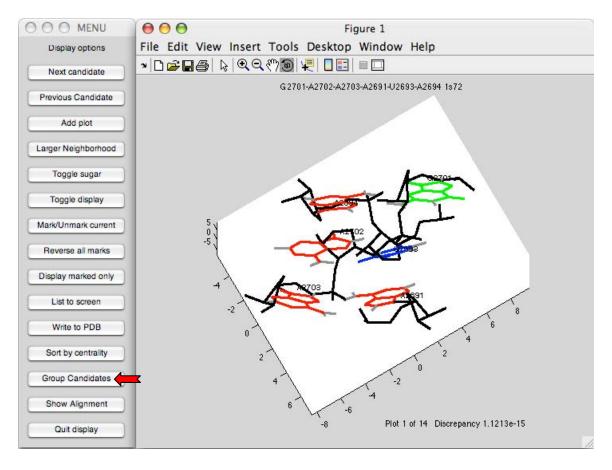


After pressing the Group Candidates button, new pop-up figure window will appear, which shows the similarity between the Candidates in tree form.

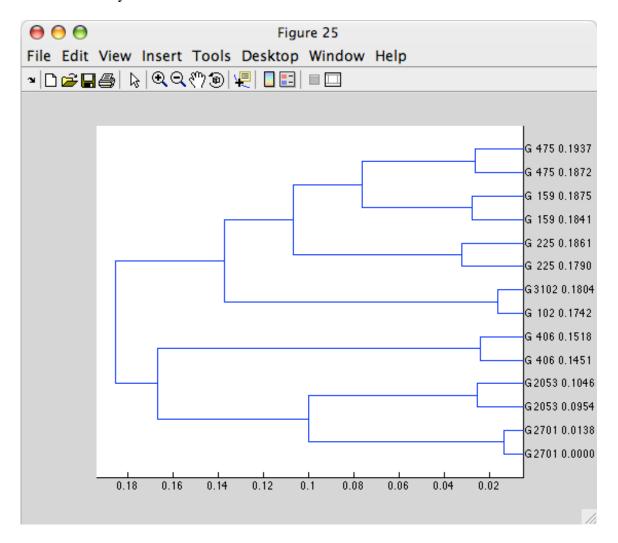

### **Aligning candidates**

The user can look at the sequence alignment of each of the Candidates by pressing the Show Alignment button in the menu.

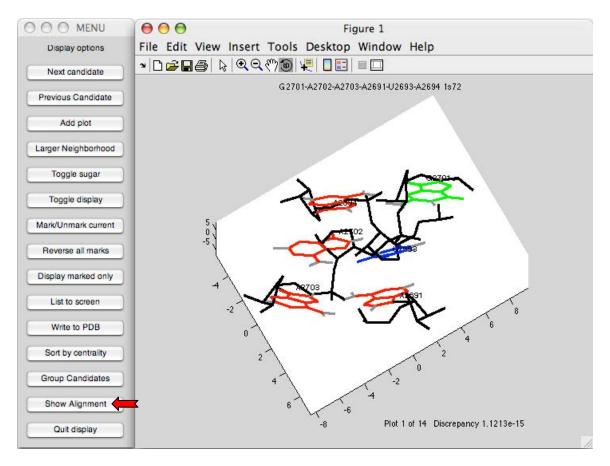


The Candidate motifs along with their alignment will be printed in the command window, as shown by the example below.

								1 23 456
1s72	0.0000	A2691	U2693	A2694	G2701	A2702	A2703	AGUAGAA
1qvf	0.0138	A2691	U2693	A2694	G2701	A2702	A2703	AGUAGAA
1qvf	0.0954	A1369	U1371	A1372	G2053	A2054	A2055	AGUAGAA
1s72	0.1046	A1369	U1371	A1372	G2053	A2054	A2055	AGUAGAA
1s72	0.1451	A 380	U 382	A 383	G 406	A 407	A 408	AGUAGAA
1qvf	0.1518	A 380	U 382	A 383	G 406	A 407	A 408	AGUAGAA
1s72	0.1742	A 77	U 79	A 80	G 102	A 103	A 104	AGUAGAA
1s72	0.1790	A 212	U 214	A 215	G 225	A 226	A 227	AGUAGAA
1qvf	0.1804	A3077	U3079	A3080	G3102	A3103	A3104	AGUAGAA
1s72	0.1841	A 174	U 176	A 177	G 159	A 160	A 161	AGUAGAA
1qvf	0.1861	A 212	U 214	A 215	G 225	A 226	A 227	AGUAGAA
1qvf	0.1872	A 463	U 465	A 466	G 475	A 476	A 477	AGUAGAA
1qvf	0.1875	A 174	U 176	A 177	G 159	A 160	A 161	AGUAGAA
1s72	0.1937	A 463	U 465	A 466	G 475	A 476	A 477	AGUAGAA

### Retrieving the results of previous searches

To retrieve previous search results the user can select one of their previous searches using the Load previous search drop-down menu located at the top-right corner of the GUI.

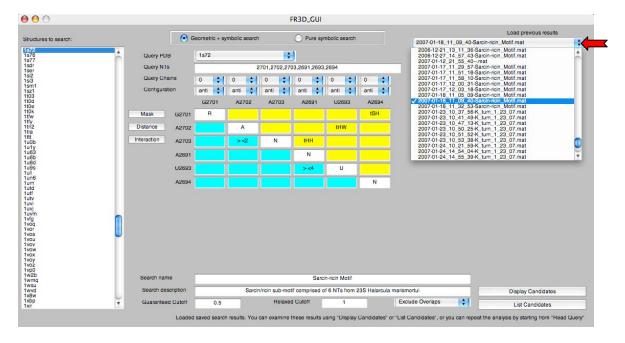

# Discrepancy and relaxed discrepancy

#### **User-maintained lists of PDB files**

To facilitate searching a subset of the entire collection of PDB files in the Matlab search path, the user may maintain lists of PDB files. To do so, create a text file with a name ending with "\_list.pdb". For example, the file **Nonredundant\_list.pdb** has these lines:

2AW4 2AVY 1s72 1j5e

Note that case does not matter. In the FR3D GUI, the list **Nonredundant\_list** will appear in the list of PDB files to search. Selecting this list will include all named files in the search. When the results of the search are saved, all files in the list are saved by name, so that when the results of the search are loaded again later, the individual files that were searched will be highlighted so that it is clear which files were searched. When using xSpecifyQuery to specify searches, names of lists can appear for the PDB files to be searched.

### **Appendix**

FR3D includes additional programs that may be of interest. These are a little harder to use, however. From the Matlab command prompt, >>, load PDB data this way:

```
>> File = zAddNTData('Nonredundant_list');
```

Specify searches in the Matlab program file xSpecifyQuery, then execute the search using:

```
>> FR3D
```

Searches are saved as usual and may be retrieved later using FR3D\_GUI.

#### References

- Leontis, N.B., Stombaugh, J. and Westhof, E. (2002) Motif prediction in ribosomal RNAs Lessons and prospects for automated motif prediction in homologous RNA molecules, *Biochimie*, **84**, 961-973.
- Leontis, N.B. and Westhof, E. (2001) Geometric nomenclature and classification of RNA base pairs, *RNA*, **7**, 499-512.
- Sarver, M., Zirbel, C. L., Stombaugh, J., Mokdad, A., Leontis, N. B. (2007) FR3D: Finding Local and Composite Recurrent Structural Motifs in RNA 3D Structures. To appear in the Journal of Mathematical Biology.