


**ReplaceThroughAPI**  
**(proposed)**

Performs various CRUD actions with the existing model **except** creating objects; objects to be created are returned.

Here the "tagging" mechanism comes into play. You can think that a tag is a kind of unique group name. We delete the objects in the existing model that are of the same "tag-group" being pushed, and then we re-create them. This requires updating the tag for the other objects that, among other tags, share also the same specified tag.

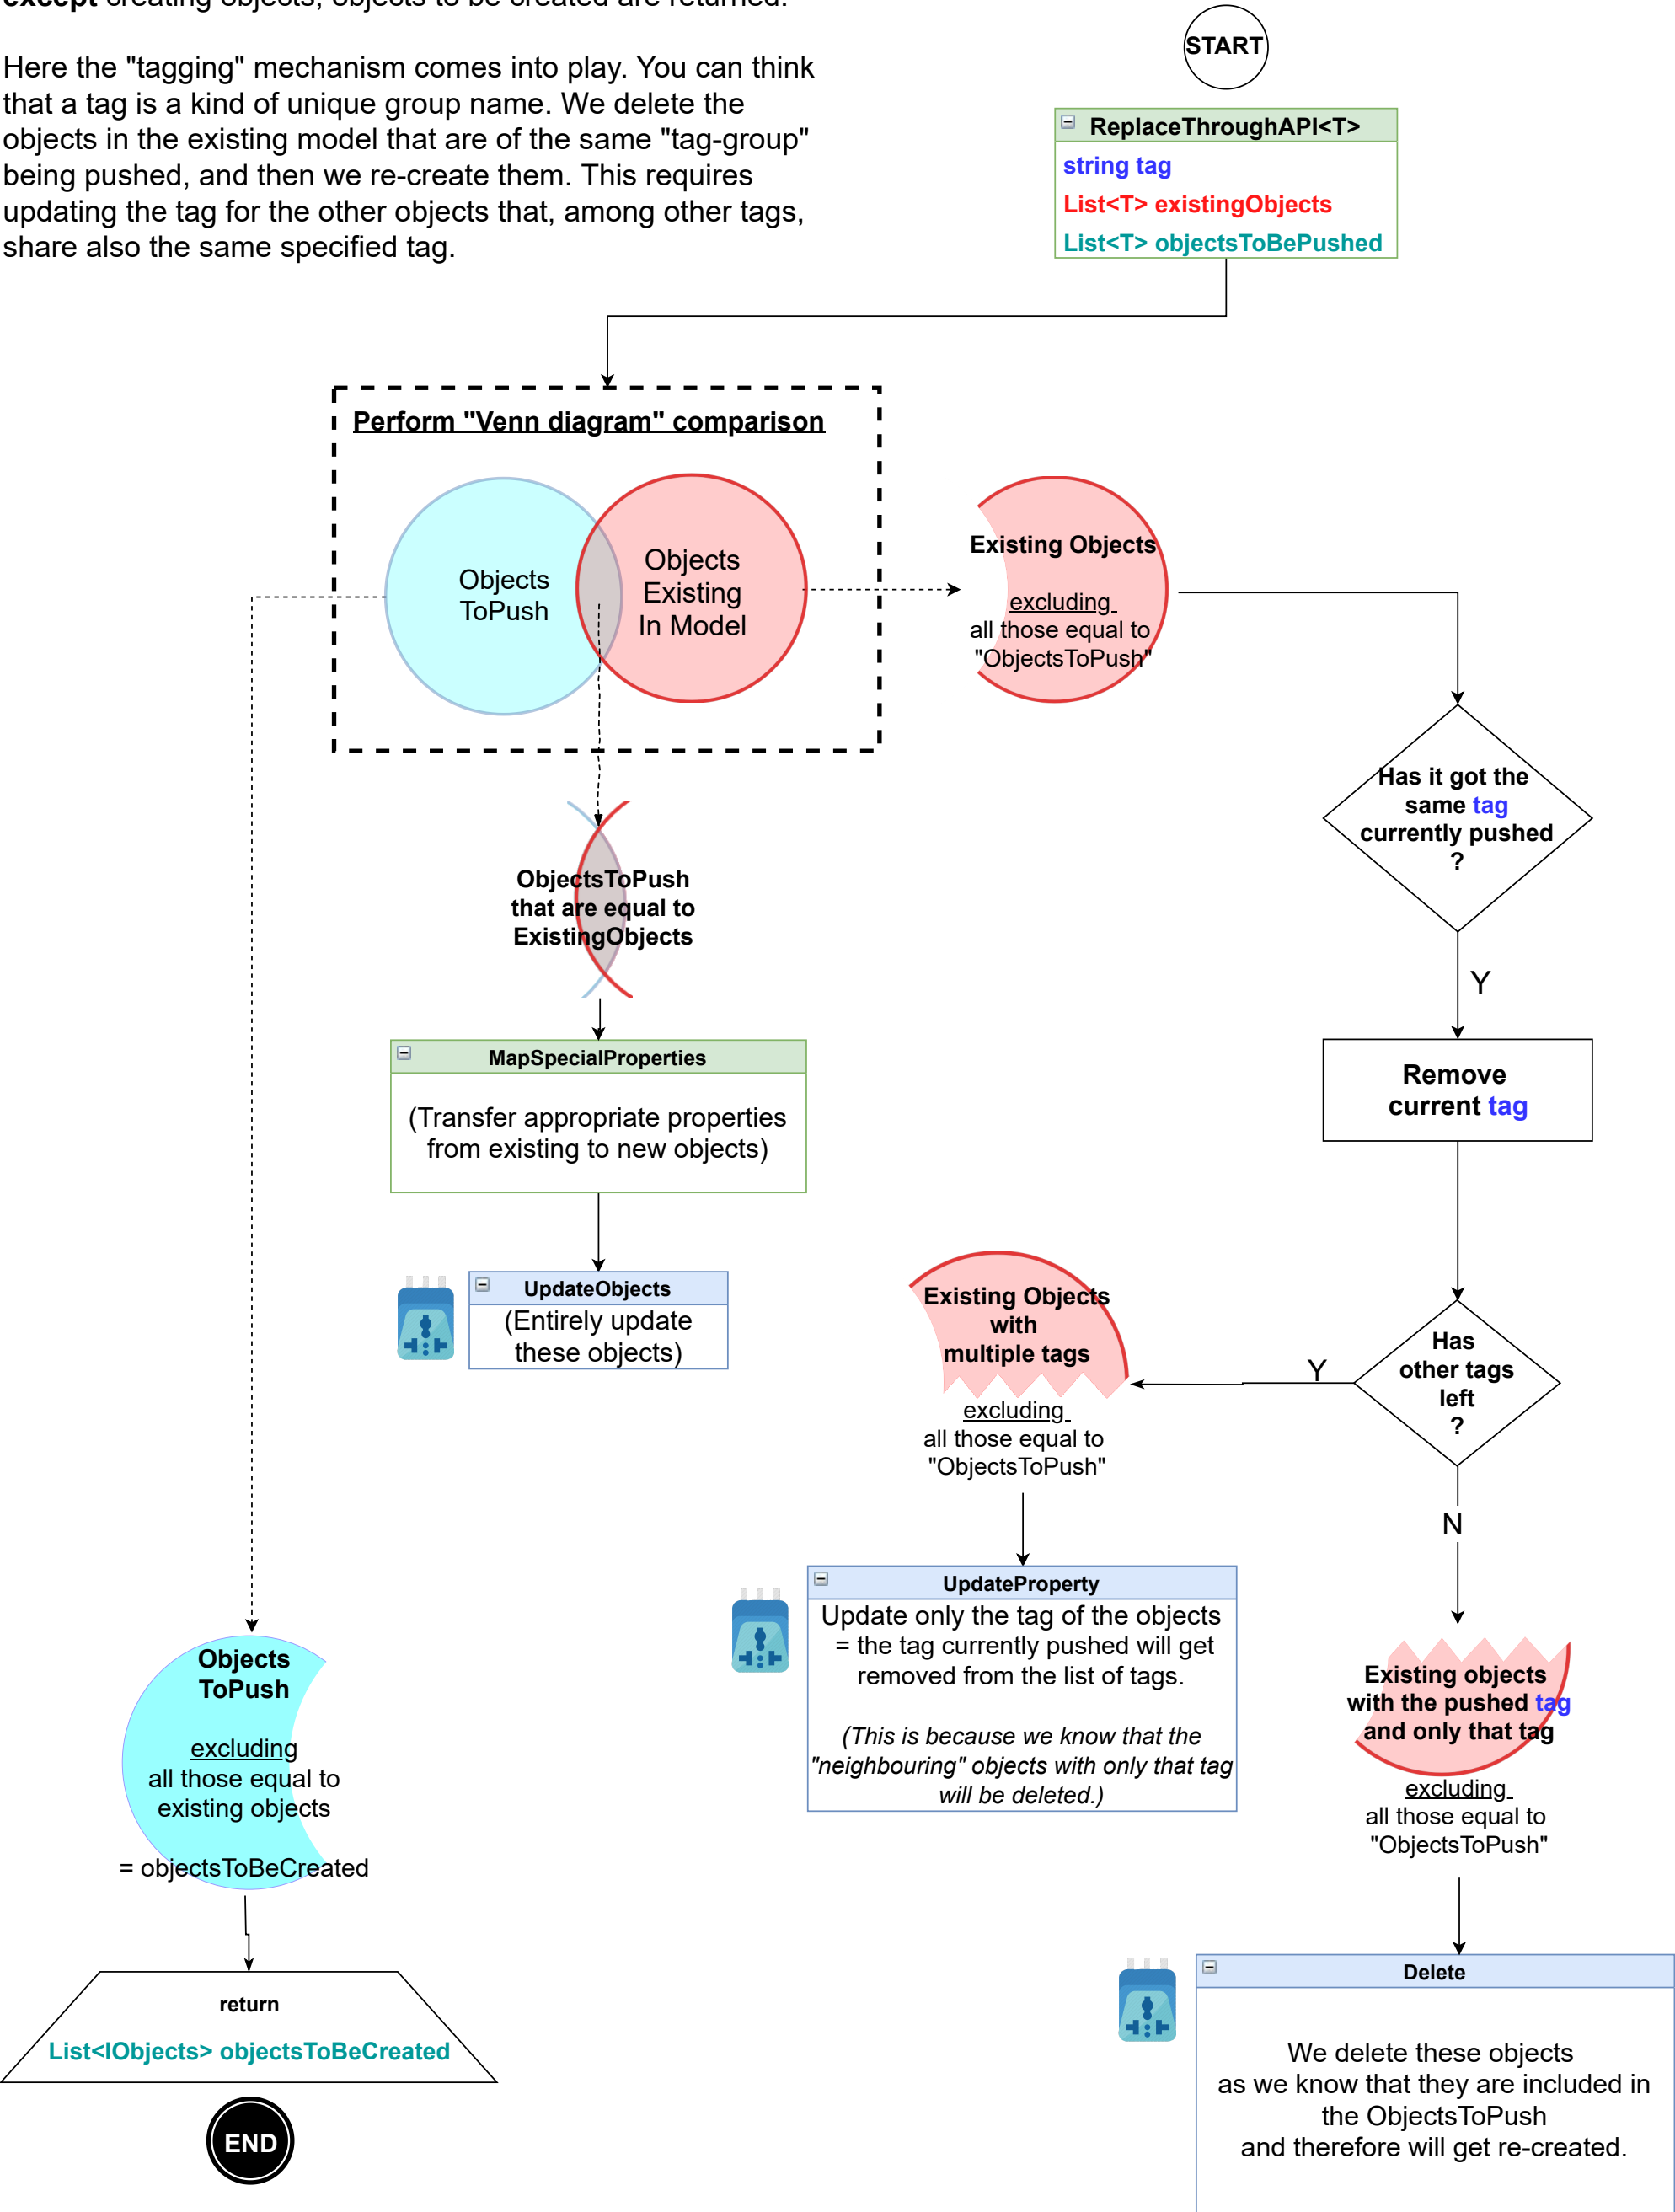

# ReplaceInMemory (proposed)

This is in alternative to the ReplaceThroughAPI.  
It will wipe everything out of the model and recreate it.  
**The deletion of everything is here assumed to be taken care of by the Create method.**  
It's meant to be used only for very specific cases (e.g. FileAdapter)

