
THE SCHOLLEY DATABASE

· Dawing the ER Model.

	Achion	Users	Cards	
Action		Done-by		
User's			apply_to	Annual An
Cards				

The problem with the above approach is	that we will		
also have need a way to check too	what card 9		
bookmark (say) was associated with	h		
A student can make many bookmorks	DOUBTS / IDEAS		
1 0	1. We would include		
i for each student, we could have	the provision to		
a multi-valued attribute containing	view a single user's		
a list of cords	Jainey glong		
1 A	with the con chidult		
Design attribute or a relationship?	appear after		
Designe attribute or a relationship?	appear after clicking on a node		
Use relation a relation; since			
CARDS will be a separat	2.10037:		
relation enginery's we cannot	Is the user journey		
Include its P.K hero.	graph for a Birgh		
The second of the second of	company (ie viewed		
Design How are we going to represent	by the company		
13946	offering muscholan		
#2 the a Journey.	or for the achaity		
	team?		
· · · · · · · · · · · · · · · · · · ·	>In the former, one		
	wer con have only		
	one journey		
	>In the latter, on user can have		
	multiple Bruneys		

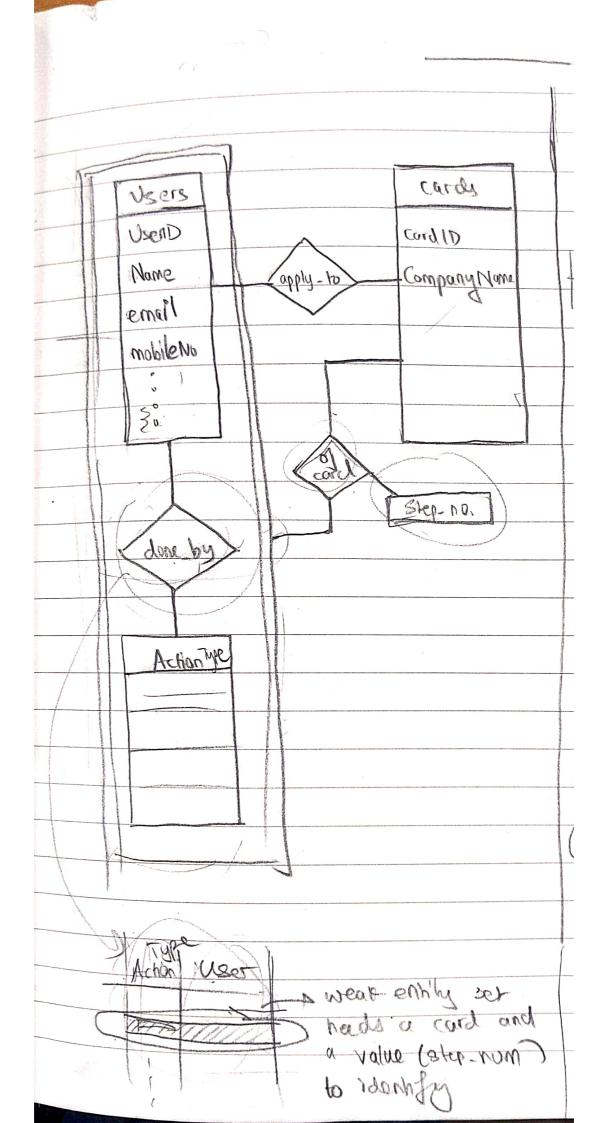

		-		1	0 1			
	U8603		apply-to	01 000	Cards			
20	VeriD	RW	USERID FX		cardID			
	Name	À	CardID FK		Company	More		
	Email -				Opp Name			
	Mobile No.				Amount			
	The state of the s				17.			
	ActionType		Herc, total p 8 mars not t merc (eg. th	crtice allow	be			
	Action-Name		8 124 19 AUL +	widn't voi	acia Piest st	arted,		
			here (eg. 10	an achio	is done b	y no		
			cannot comb			yet		
	done by		of_cord					
	Action Non F	K	Action_Name	FK	See 1			
/		4	User.1D	FK1				
	Callo III		CordID	FK				
			Steano					
	Here, total	Mth'cino	tion					
			every action done	,	Actions	in the		
	by a user	MUST	belong to some	05	Achbr Nane	FK		
			nd a step ao-	. •	UserD	FK		
	We can combine there tables contill FK							
	, vo	MI Coul	me make moos		8tep No			
						(S)		

